Location of Construction:	Ournar	Phon		In A A A A A A
1 City Centerr 4th flac	Owner:		871-1080	Permit Non 8095
Owner Address:	Lessee/Buyer's Name:	The state of the s	essName:	
Owner reduces.	Least, Sayer S. Mine.	3.13(12)	Copy there.	PERMIT ISSUED
Contractor Name:	Address:	Phone:		Permit Issued: 135UED
Dirigo Management	1 City Center Prld,			
Past Use:	Proposed Use:	COST OF WORK:	PERMIT FEE:	AUG 2 6 1998
0.000		\$ 3,000.00	\$ 35.00	
Office	Sane	FIRE DEPT. Approve		CITY OF PORTLAND
		☐ Denied	Use Group: Type:	Zone: CBL:
		m www	200 100 2000	V 032-L-002
Proposed Project Description:		Signature: PEDESTRIAN ACTIVIT	Signature:	Zoning Approval:
		Action: Approve	the second secon	Special Zone or Reviews:
Nobe Intenton Security (Assessed			Approved with Conditions: □	
Make Interior Resovations (4)	th floor)	Denied		
		Contract of	HIM	☐ Wetland ☐ Flood Zone
		Signature:	Date:	Subdivision
Permit Taken By:	Date Applied For:	19 August 1998		☐ Site Plan maj ☐minor ☐mm [
		19 AUGUSE 1970		Zoning Appeal
1. This permit application does not preclude the	Applicant(s) from meeting applical	ble State and Federal rules.		□Variance
2. Building permits do not include plumbing, se	THE RESIDENCE OF THE PARTY OF T			☐ Miscellaneous
		Service Programme		☐ Conditional Use ☐ Interpretation
 Building permits are void if work is not started tion may invalidate a building permit and sto 		of issuance. False informa-		□ Approved
tion may invalidate a building permit and sto	p an work			□ Denied
(2)				Historic Preservation Not in District or Landmark
		PFD	MIT ISSUED QUIREMENTS	☐ Does Not Require Review
		WITH	MIT ISSUED	□ Requires Review
		W. W.E	QUIRENED	A CASA CASA CASA CASA CASA CASA CASA CA
			TEMENTS	Action:
	CERTIFICATION			□Appoved
I hereby certify that I am the owner of record of the			of record and that I have bee	The second secon
authorized by the owner to make this application a				
if a permit for work described in the application is	issued, I certify that the code offic	ial's authorized representative shall	have the authority to enter a	11 2
areas covered by such permit at any reasonable ho	our to enforce the provisions of the	code(s) applicable to such permit		Date:
		20 August 1998		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WOR	Y TITLE		PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WOR	N, IIILE		PHONE:	CEO DISTRICT
White-Pe	rmit Desk Green-Assessor's	Canary-D.P.W. Pink-Public File	Ivory Card-Inspector	10/10/

Foundation: Framing: Plumbing: Phother:			6/15/99 616 an COMMENTS
Inspection Record			
Date			

BUILDING PERMIT REPORT

DATE: 82491 ADDRESS: 1 City Contra-
DATE: 824/91 ADDRESS: 1 C. ty C. trz- REASON FOR PERMIT: reneration's
BUILDING OWNER: 1 C.t. Control Association
CONTRACTOR: Dirige myT.
PERMIT APPLICANT:
USE GROUPB BOCA 1996 CONSTRUCTION TYPE
CONDITION(S) OF APPROVAL
This Permit is being issued with the understanding that the following conditions are met:
Approved with the following conditions: * *18 *19 *29 *39
 This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services
must be obtained. (A 24 hour notice is required prior to inspection)
2.5 Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing
not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches
beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the
bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The
• 100 of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is use the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be
protected with an approved filter memorane material. The pipe or tile shall be placed on not less than 2" of gravel or
* crushed stone, and shall be covered with not less than 6" of the same material.
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is
done to verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from
adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire
resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated fr
the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2
inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA
National Mechanical Code/1993).
 Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city
building code.
8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower
level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4,
1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material structures.
that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that
would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be
less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of a
least 1 1/4" and not greater than 2".
O Haydrage is habitable cause is a minimum of 7'4"

- Headroom in habitable space is a minimum of 7'6".
- 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
- 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
- 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension

- shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self-closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
- 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
 - The Fire Alarm System shall be maintained to NFPA #72 Standard.
 - The Sprinkler System shall maintained to NFPA #13 Standard.
 - All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. (crawl spaces & attics) £24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
 - 25. All requirements must be met before a final Certificate of Occupancy is issued.
 - 26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
 - 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).

28.	Please read and implement the attached Land Use-Zoning report requirements. NO Combustinas materials shall be used in proposed wall
X_29.	No Combustings materials shall be used in proposed wall
•	CARSTRUCTION,
1-30 .	IF glass is being used if must be used in accordance
	with Ebyoter 240 fl The bldg, Codie;
31.	
32.	

P Samuel Hoffses, Building Inspector
cc: Lt. McDougall, PFD
Marge Schmuckal

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building):	One City Center-Too	land Me. 4th FINOR		
Total Square Footage of Proposed Structure	Square Footage of Lot			
Tax Assessor's Chart, Block & Lot Number	ome One City Center Case	ociales Telephone#:		
Chartif ()3 2 Blockil L Lord ()0 2	Vo Dingo Management One City Center & Portla	md. me 207-871-1080		
Owner's Address: C/O Divigo Managoment	Lesson/Buyer's Name (If Applicable)	Cost Of Work: Fee		
One city center 100	•	\$ 3,000, \$ 35		
Potland, Me. 04101		01		
Proposed Project Description:(Please be as specific as possible)	Expand Dings office	epace into old Freet office		
Proposed Project Description: (Please be as specific as possible) (by cultury new 4 opening. C	onstruct new word is	n hereption one to create		
wars office be locave plinamic	e about the mold of	coning! Relocate Conference		
very good + frig in agg wood	inc,			
Contractor's Name, Address & Telephone	CALAT DA	Rec'd By		
Durgh Management Co. (ne City Order Hot	land Me. 871-1080		
Current User Office Space	Proposed Use: SO	umo		
•All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application:				
1) ACopy of Y	'our Deed or Purchase and Sale A	erecueur		
1) ACopy of Your Deed or Purchase and Sale A DEPT OF BUILDING INSPECTION 2) A Copy of your Construction Contract, if a failable of PORTLAND, ME 3) A Plot Plan/Site Plan				
Minor or Major site plan review will be required for	•	sehel and to the		
checklist outlines the minimum standards for a site p				
•	4) Building Plans	11:31		
Unless exempted by State Law, construct	tion documents must be designed	registered designip reference l.		
w combiene ser of construction manifes anowing an	of the following elements of court			
Cross Sections w/Framing details (including the control of th	ng porches, decks w/ railings, and a	ccessory structures)		
Floor Plans & Elevations				
Window and door schedules Foundation plans with required drainage and dampproofing				
 Foundation plans with required drainage and dampproofing Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas 				
equipment, HVAC equipment (air handling) or other types of work that may require special review must be included. Certification				
I hereby certify that I am the Owner of record of the named proper	rty, or that the proposed work is authorized b			

Building Permit Fee: \$25,00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

Date:

application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to

enforce the provisions of the codes applicable to this permit.

Signature of applicant:

Construction Scope of Work For

One City Center Portland, Maine 04101

Carpentry / Hardware:

- 1. Construct new wall with door at "A". New wall shall consist of 3-1/2" metal studs and 5/8" drywall to divide entrance / reception area and create new office. Wall to be constructed from floor to ceiling gridwork. Existing entrance to be relocated as shown.
- 2. Cut new 4' opening for access to old Fleet Securities old office area. Remove existing door and fill in opening at "B".
- 3. Relocate door as shown and fill in opening at "C".

Electrical:

- · 1. Install two new outlets as needed.
 - 2. Relocate light switches as needed and install new light switch to newly created office.
- 3. Install emergency and exit lighting as necessary to meet Fire Safety Codes.
 - 4. Re-route all circuits of old Fleet Securities to Dirigo Management's panel.

Finishes:


1. New walls, doors, and trim finished to match existing.

HVAC:

1. HVAC contractor to make necessary adjustments to system where new wall is to be constructed. e

Sprinklers:

1. Add or adjust sprinklers as needed in reception area and new office to meet all applicable codes.

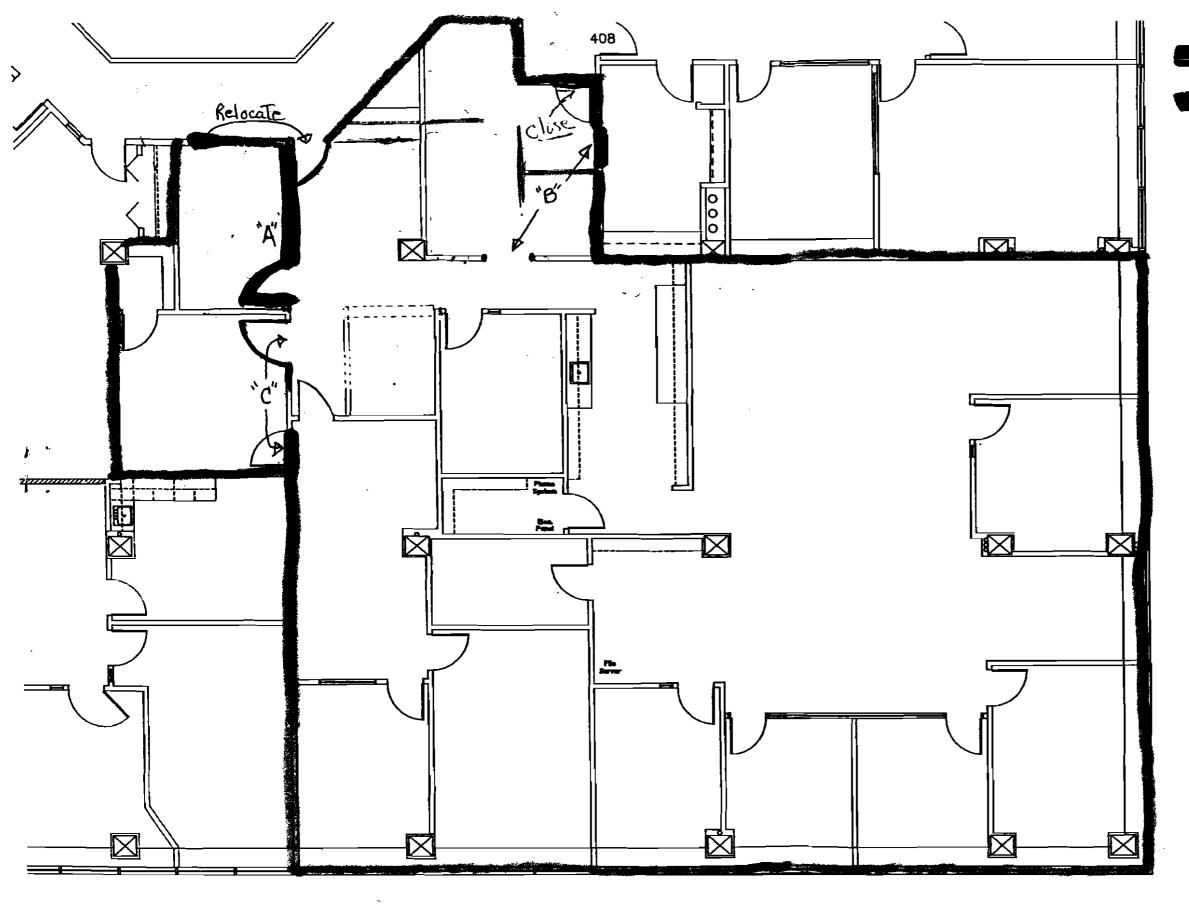

New Walls
Total DMC Space

Dirigo Management 4th Floor One City Center Portland, ME.

Date: 40/15/96 8/17/98

Scale: 1/8''=1'0''