

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Permit No: **970018**

Location of Construction: 37 Wharf St		Owner: Soley, Joseph		Phone:							
Owner Address:		Leasee/Buyer's Name: G'Vanni's		Phone:							
Contractor Name: Jeff Karil		Address: G'Vanni's 37 Wharf St Portland, ME 04101		Phone: 775-9061							
Past Use: Restaurant		Proposed Use: Same		<table border="1"> <tr> <td>COST OF WORK: \$ 450.00</td> <td>PERMIT FEE: \$ 25.00</td> </tr> <tr> <td>FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied</td> <td>INSPECTION: U. Use Group A-3 Type: 3B BOCA 96</td> </tr> <tr> <td>Signature: [Signature]</td> <td>Signature: [Signature]</td> </tr> </table>		COST OF WORK: \$ 450.00	PERMIT FEE: \$ 25.00	FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: U. Use Group A-3 Type: 3B BOCA 96	Signature: [Signature]	Signature: [Signature]
COST OF WORK: \$ 450.00	PERMIT FEE: \$ 25.00										
FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: U. Use Group A-3 Type: 3B BOCA 96										
Signature: [Signature]	Signature: [Signature]										
Proposed Project Description: Erect temporary ice shield as per plans				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: _____ Date: _____							
Permit Taken By: Mary Green		Date Applied For: 03 January 1997									

PERMIT ISSUED
Permit Issued:
JAN 10 1997
CITY OF PORTLAND

Zone: **R-3** CBL: **032-R-001**

Zoning Approval:

Special Zone or Reviews:

Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

- This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: _____

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT **Jeff Karil** ADDRESS: _____ DATE: **03 January 1997** PHONE: _____

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ PHONE: _____

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT 2
[Signature]

BUILDING PERMIT REPORT

DATE: 9/Jan/96 ADDRESS: 37 Wharf ST -

REASON FOR PERMIT: Erect Temporary Ice Shield

BUILDING OWNER: Joseph Soley (Tenant G'Kanni's)

CONTRACTOR: ~~Boyer~~ (Jeff Karll)


PERMIT APPLICANT: " " " APPROVAL: *24*25

DENIED:

CONDITION OF APPROVAL OR DENIAL

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42" , except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
7. Headroom in habitable space is a minimum of 7'6".
8. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
9. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
10. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
11. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
12. All vertical openings shall be enclosed with construction having a fire rating of at least one (1)hour, including fire doors with self closer's.
13. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
14. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's building code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basementsIn addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

15. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
16. The Fire Alarm System shall be maintained to NFPA #72 Standard.
17. The Sprinkler System shall maintained to NFPA #13 Standard.
18. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
19. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
20. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
21. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
22. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. of the City's Building Code.
24. NO Lettering on hood.
25. MUST be removed No Later Than March 30th 1997
26. _____



P. Samuel Hobbins, Chief of Code Enforcement

cc: Lt. McDougall, PFD
Marge Schmuckal

D. Andrews Senior planner

G.O.N.E. (G'Vanni's of New England)

FAX Transmission

From: Jeff Karll
To: SAUL HULSE & AND DEB ANIGRO'S
Company: G'Vanni's of Maine
376 West St.

Date: 12/24/86
Time: 11:30 AM
FAX #: ~~874-8124~~
874-8714

Conditions of approval:

Ft. Lauderdale



- no lettering on hood
 - hood and hardware to be removed no later than March 30th.
- the proposed hood.
- best year get hit by
is also broken
at year. Since
3' long.

Trust that this meets with your approval.

Jeff Karll

Contractor is Buss Sign Co. Portland Me.

VOICE: (617) 581-0009 FAX: (617) 581-0050

220 Broadway, Suite 102, Lynnfield, MA 01940

TEMPORARY HOOD FOR PEDESTRIAN (ALUMINUM)
AND SIGN PROTECTION FROM FALLING ICICLES
See 301 from March 30, will be removed as soon as practical.

NOT TO SCALE


11/3/97 Rev. JBR

Notes:

- No lettering on hood
- Hood and hardware to be removed no later than March 30th each year
- Work to be done by Burr Sign Co. 799-1183

11/7/97 Rev. JBR

TEMPORARY HOOD 18" I
WITH HOOD PROJECTS
10" FROM WALL

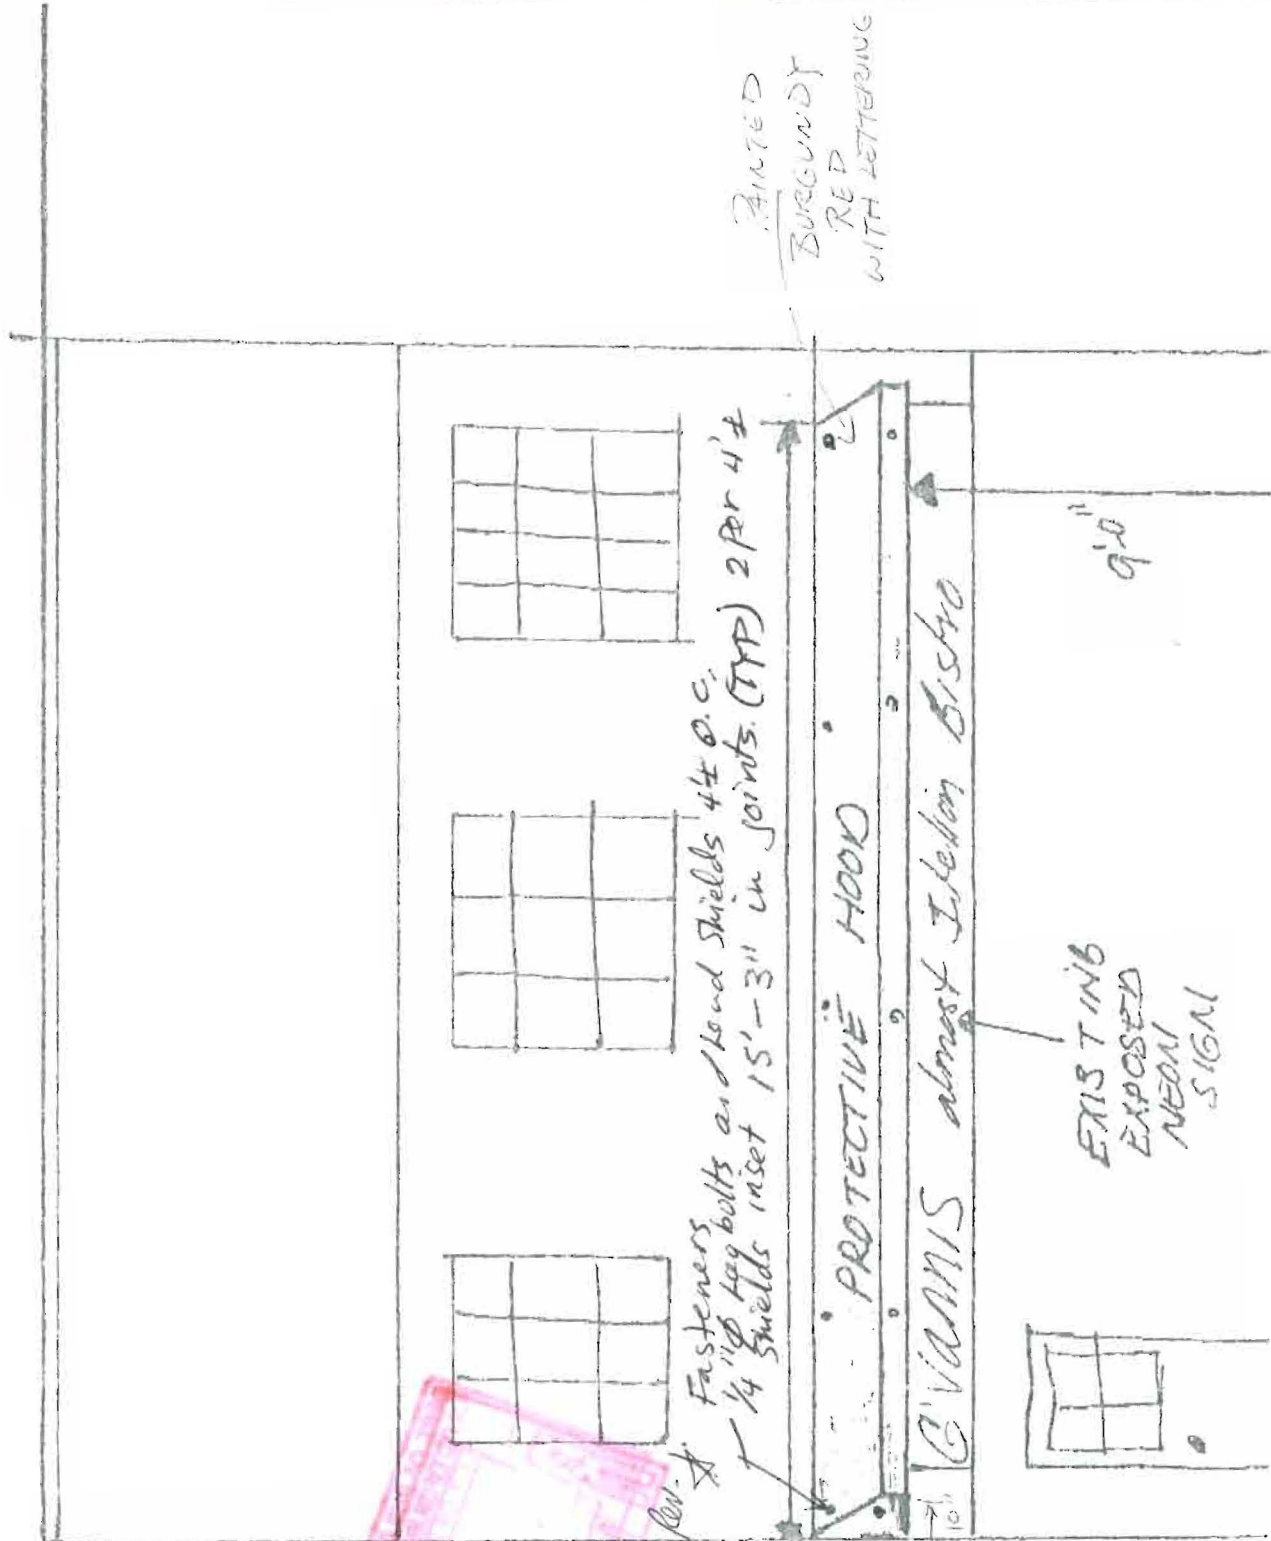

Fasteners $\frac{1}{4}$ " tag bolts and head shields 4# D.C.
 $\frac{1}{4}$ " Shields inset 15'-3" in joints. (TYP) 2 per 4'

PROTECTIVE HOOD

G. VANNIS almost Irlebon Bischo

EXISTING EXPOSED NEON SIGN

9'0"

PAINTED BURGUNDY RED WITH LETTERING