GENERAL NOTES

NOTES ON THESE DRAWINGS ARE NOT INTENDED TO REPLACE SPECIFICATIONS. SEE SPECIFICATIONS FOR REQUIREMENTS IN ADDITION TO DRAWING NOTES.

STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH PROJECT SPECIFICATIONS AND THE ARCHITECTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, EQUIPMENT, SITE AND SHOP DRAWINGS. CONSULT THESE DRAWINGS FOR LOCATIONS AND DIMENSIONS OF CHASES, INSERTS, SLEEVES, DEPRESSIONS AND OTHER DETAILS NOT SHOWN ON THE STRUCTURAL DRAWINGS.

ALL DIMENSIONS, ELEVATIONS AND CONDITIONS MUST BE VERIFIED IN THE FIELD BY THE GENERAL CONTRACTOR. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE PROCEEDING WITH THE AFFECTED PART OF THE WORK. THE CONTRACTOR SHALL DETERMINE ALL NECESSARY DIMENSIONS, ELEVATIONS AND CONDITIONS REQUIRED FOR THE FABRICATION AND ERECTION OF THE BUILDING'S COMPONENTS PRIOR TO THE SUBMISSION OF SHOP DRAWINGS. ALL SHOP DRAWINGS SHALL ACCURATELY REFLECT THE GENERAL CONTRACTOR'S VERIFICATION OF FIELD CONDITIONS.

SHOP DRAWINGS SHALL BE ORIGINAL DRAWINGS PREPARED BY THE GENERAL CONTRACTOR OR A SUBCONTRACTOR. REPRODUCTION OF ANY STRUCTURAL DRAWING FOR USE AS A SHOP DRAWING IS NOT ACCEPTABLE.

THE STRUCTURE IS DESIGNED TO BE SELF-SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS SOLELY THE GENERAL CONTRACTOR'S RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCING TO ENSURE THE THE SAFETY OF THE BUILDING AND IT'S COMPONENTS DURING ERECTION. THIS INCLUDES THE ADDITION OF NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS AND/OR TIEDOWNS. SUCH MATERIAL SHALL REMAIN THE PROPERTY OF THE GENERAL CONTRACTOR AFTER COMPLETION OF THE BUILDING.

SECTIONS AND DETAILS SHOWN ON THE STRUCTURAL DRAWINGS SHALL BE CONSIDERED TYPICAL AND USED IN SIMILAR CONDITIONS.

THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL FOLLOW ALL APPLICABLE FEDERAL, STATE AND MUNICIPAL REGULATIONS INCLUDING THE FEDERAL DEPARTMENT OF LABOR OCCUPATIONAL SAFETY AND HEALTH ACT.

DESIGN CRITERIA

BUILDING CODE: 2009 INTERNATIONAL BUIULDING CODE

RESPONSE MODIFICATION COEFFICIENT, R

SYSTEM OVERSTRENGTH FACTOR, Ω


ANALYSIS PROCEDURE

```
DESIGN LOADS:
LIVE LOADS
    RETAIL UNITS
                                                   100 PSF
 SNOW LOAD
                                                   60 PSF
     GROUND SNOW LOAD, Pa
     SNOW EXPOSURE FACTOR, Ce
     SNOW LOAD IMPORTANCE FACTOR, IS
                                                   1.0
     THERMAL FACTOR, Ct
                                                   42 PSF
    FLAT ROOF SNOW LOAD, Pf
 WIND LOAD
     BASIC WIND SPEED (3 SEC GUST), V3s
                                                   100 MPH
     WIND IMPORTANCE FACTOR, IW
     BUILDING CATEGORY
    EXPOSURE CATEGORY
 EARTHQUAKE DESIGN DATA
     SEISMIC IMPORTANCE FACTOR, le
                                                   1.0
     MAPPED SPECTRAL RESPONSE ACCELERATIONS
        0.2 SEC PERIOD, Ss
                                                   0.315
            I SEC PERIOD, SI
                                                   0.077
     SITE CLASS
     SPECTRAL RESPONSE COEFFICIENTS
        0.2 PERIOD 5% DAMPED, Sds
                                                   0.325
       I SEC PERIOD 5% DAMPED, Sdl
                                                   0.123
     SEISMIC DESIGN CATEGORY
     BASIC SESIMIC-FORCE-RESISTING SYSTEM
                                                   ORDINARY MOMENT FRAMES
     DESIGN BASE SHEAR
       BUILDING A
                                                   17.7 KIPS
       BUILDING B
                                                   26.1 KIPS
       WAREHOUSE
                                                   19.1 KIPS
     SEISMIC RESPONSE COEFFICIENT, Cs
                                                   0.093
     DEFLECTION AMPLIFICATION FACTOR, Cd
                                                   3.0
```

3.5

3.0

EQUIVALENT LATERAL FORCE

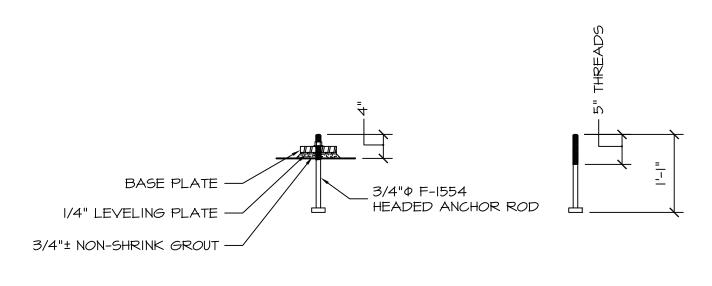

TYPICAL ANCHOR ROD DETAILS 3/4"=1'-0"



GENERAL NOTES AND SCHEDULES