

WAREHOUSE ROOF FRAMING PLAN

ROOF 1/8"=1'-0"

DIMENSIONS ARE APPROXIMATE AND MUST BE FIELD VERIFIED. THE NEW BUILDING IS TO BE

CONSTRUCTED FOLLOWING THE PERIMETER OF THE EXISTING BUILDING.

SEE ARCHITECTURAL DRAWINGS FOR DOOR LOCATIONS.


JOIST BEARING ELEV AT NORTH WALL = 12'-0" ABOVE SLAB. JOIST BEARING ELEV AT SOUTH WALL = 11'-4" ABOVE SLAB.

ROOF DECK IS 20 GAGE, I 1/2" TYPE B, PAINTED STEEL DECK. FASTEN DECK USING 5/8"¢ PUDDLE WELDS IN 36/3 PATTERN WITH (I) #10 TEK SIDELAP FASTENER.

JOISTS DESIGNATED SP SHALL BE DESIGNED FOR (2) 500 LB POINT LOADS SPACED 84" APART LOCATED ANYWHERE WITHIN THE MID-THIRD OF THE JOIST SPAN.

PROVIDE AND INSTALL BRIDGING IN ACCORDANCE WITH SJI REQUIREMENTS.

SEE SO.I FOR LOOSE LINTEL SCHEDULE.

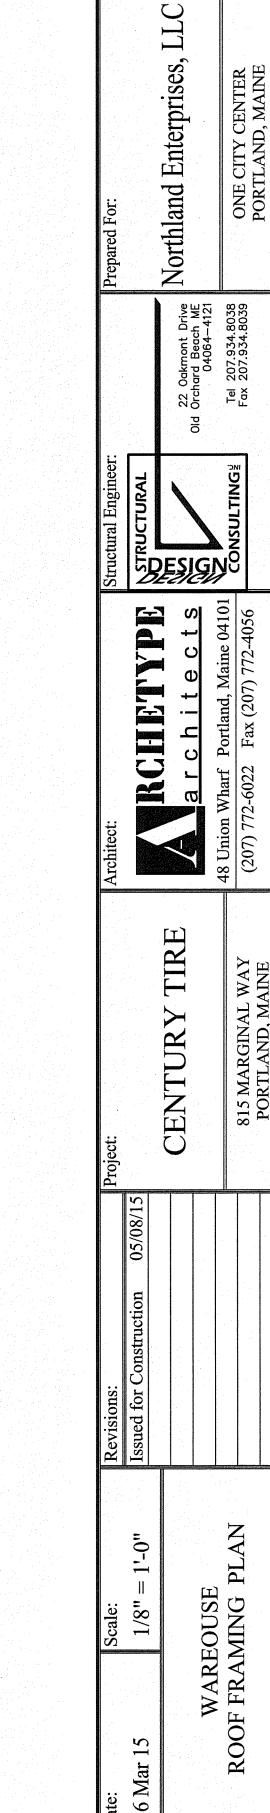

Project North