



MI REFLECTED CEILING PLAN

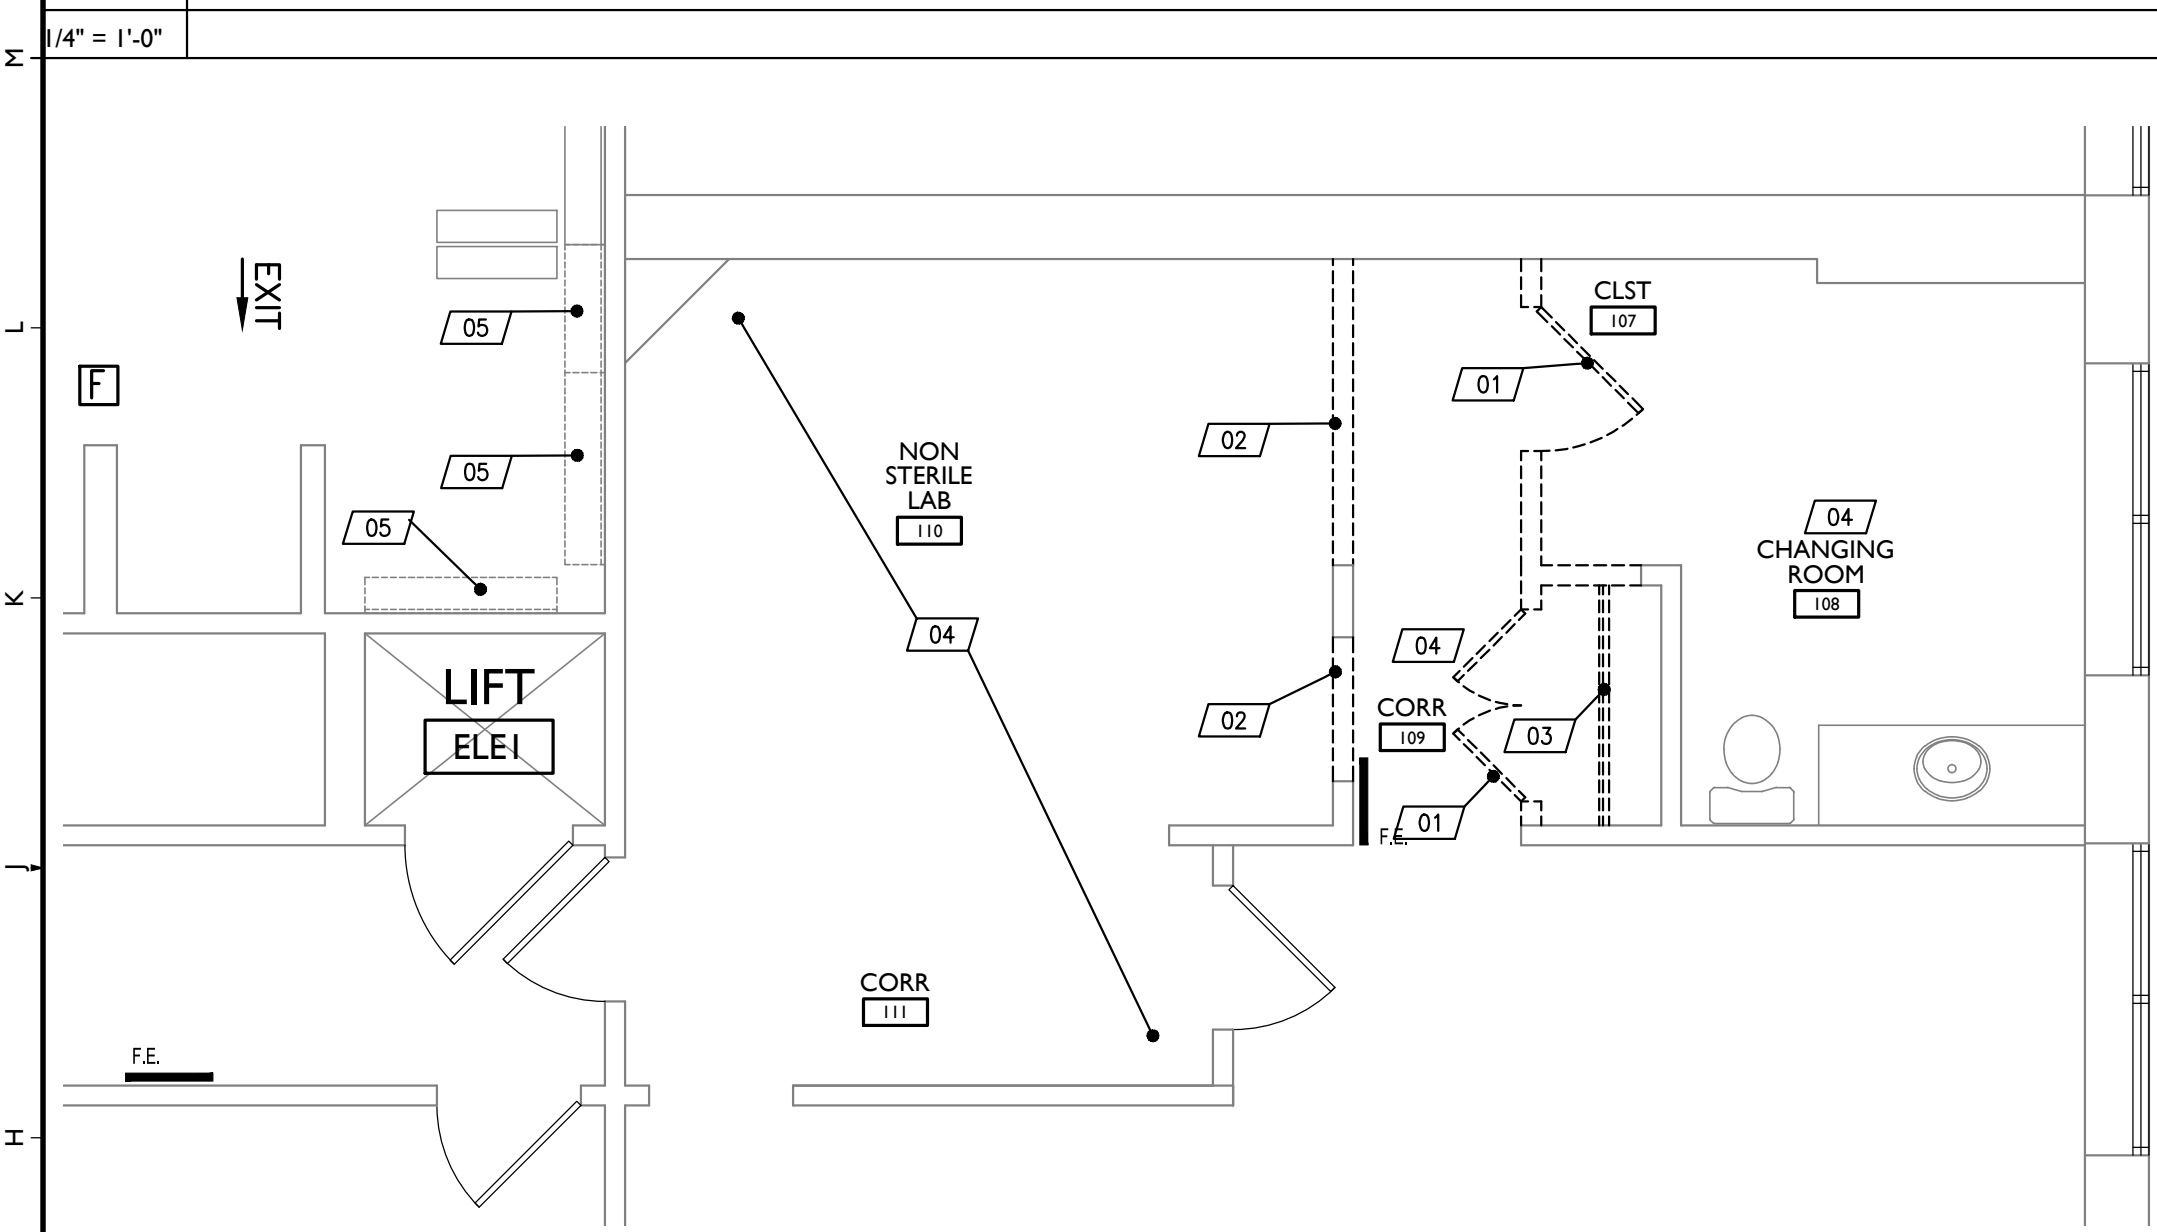

GI DEMOLITION PLAN

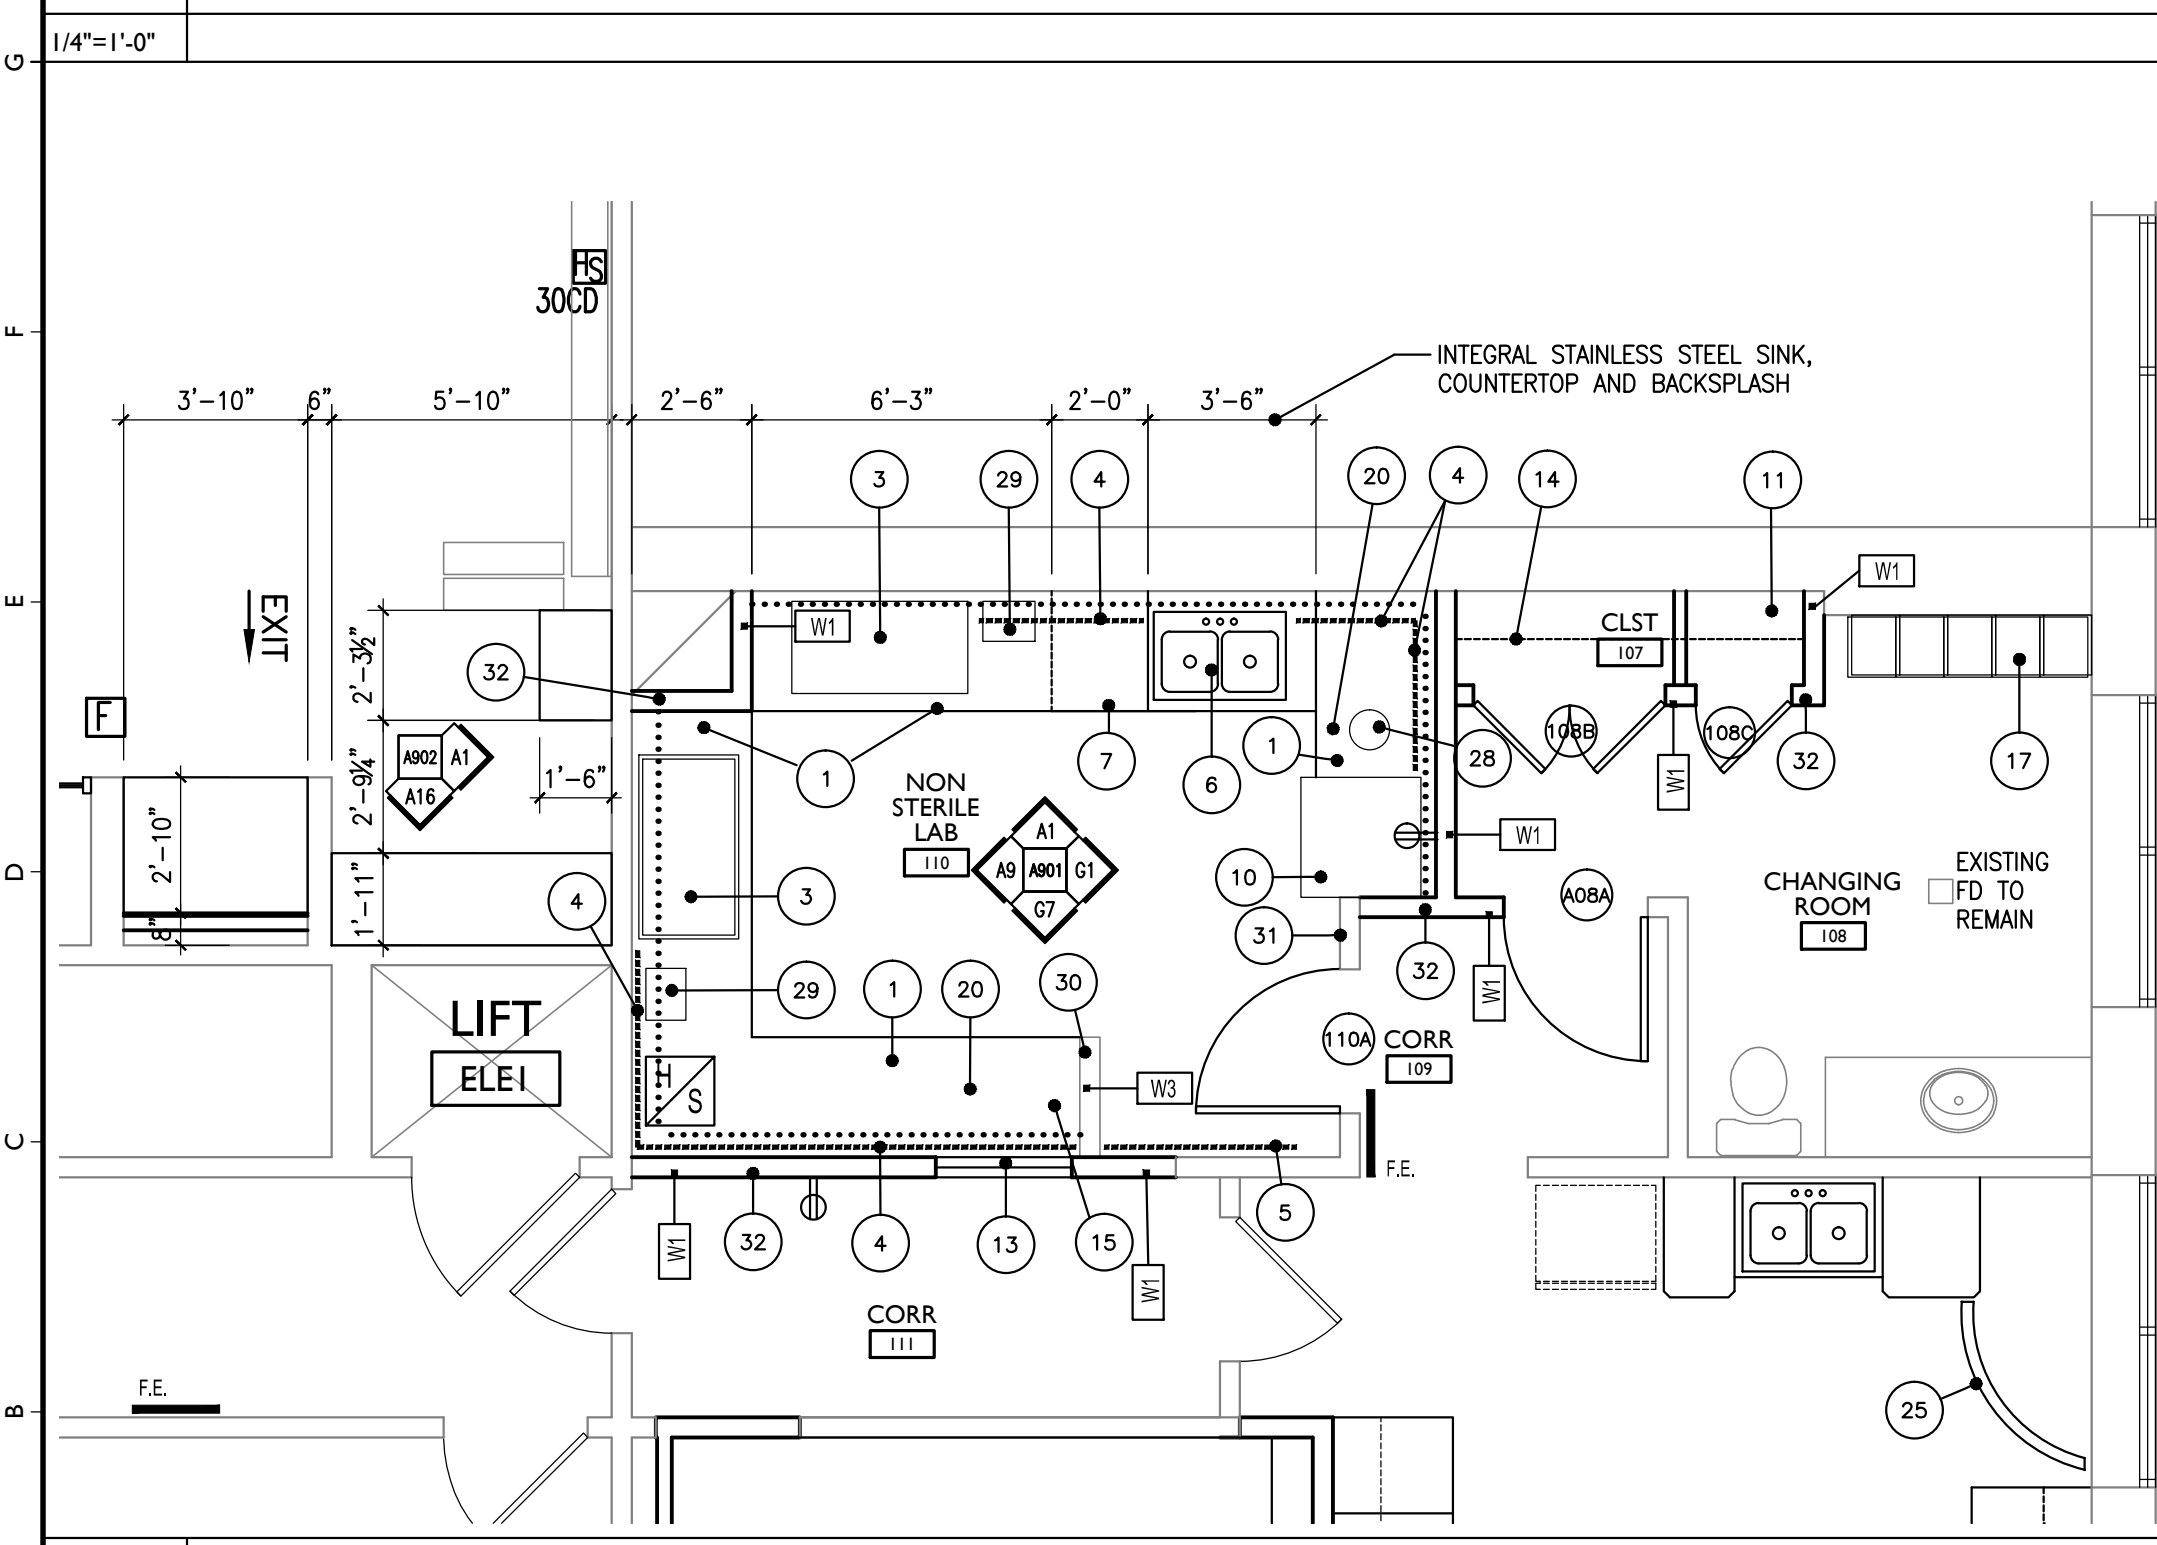

AI FLOOR PLAN, POWER PLAN AND EQUIPMENT LAYOUT

- 01 REMOVE DOOR, FRAME, TRIM (BOTH SIDES) AND ALL ASSOCIATED HARDWARE AS REQUIRED FOR NEW CONSTRUCTION AND/OR INSTALLATION OF NEW DOORFRAME. WHERE APPLICABLE, SALVAGE FOR REUSE. WHERE APPLICABLE, REMOVE ALL SOIL AND DEBRIS. PREPARE EXISTING SUBFLOOR AS REQUIRED FOR SMOOTH AND LEVEL APPLICATION OF NEW FLOORING.
- 02 REMOVE PORTION OF EXISTING WALL AS SHOWN. REMOVE ALL SOIL AND DEBRIS. PREPARE EXISTING SUBFLOOR AS REQUIRED FOR SMOOTH AND LEVEL APPLICATION OF NEW FLOORING.
- 03 REMOVE CLOSET HANGER RODS. REPAIR/PATCH/REP WALL FOR SMOOTH AND LEVEL APPLICATION OF NEW FINISH PAINT.
- 04 REMOVE EXISTING FLOORING AND WALL BASE. REMOVE ALL SOIL AND DEBRIS. REPAIR/PATCH/PREPARE SUBFLOOR AND WALL FOR SMOOTH AND LEVEL APPLICATION OF NEW FINISH FLOORING AND WALL BASE.
- 05 REMOVE SLAT WALL FROM PRESENT LOCATION, SALVAGE AND REUSE IN NON-STERILE LAB 110.

M8 DEMOLITION LEGEND

- HARDWARE LEGEND:**
- HW1 HINGES, SILENCERS, DOOR STOP, LEVER HANDLE W/ PASSAGE SET
 - HW2 HINGES, SILENCERS, DOOR STOP, CLOSER, LEVER HANDLE WITH PRIVACY SET
 - HW3 HINGES, SILENCERS, DOOR STOP, LEVER HANDLE
- NOTES:**
1. FINISH: US26D
 2. ALL HARDWARE SHALL BE ADA COMPLIANT.

L8 DOOR HARDWARE LEGEND

1. COORDINATION: PRIOR TO ANY DEMOLITION ALL DEMOLITION WORK SHALL BE COORDINATED WITH ALL NEW CONSTRUCTION BY ALL TRADES. GENERAL CONTRACTOR SHALL NOTIFY ARCHITECT IN WRITING OF ANY AND ALL FIELD CONDITIONS NOT SHOWN IN THE CONSTRUCTION DOCUMENTS PRIOR TO COMMENCEMENT OF DEMOLITION CONSTRUCTION. IN ABSENCE OF INFORMATION INDICATING OTHERWISE, CONTRACTOR SHALL BRING AREAS AND SURFACES UP TO STANDARDS OF NEW CONSTRUCTION IN THE AREAS CALLING FOR NEW CONSTRUCTION.
 2. DAMAGE: EXISTING BUILDING OR BUILDING SYSTEM AFFECTED BY NEW WORK, DEMOLITION OR WHICH MAY BE DAMAGED BY THE GENERAL CONTRACTOR OR SUBCONTRACTORS SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR BY METHODS DESCRIBED IN THESE DOCUMENTS, OR AS APPROVED BY THE ARCHITECT.
 3. EQUIPMENT AND FIXTURES - NEW OR RELOCATED ITEMS SHALL BE VERIFIED BY CONTRACTOR AS APPROPRIATE TO THE ADJACENT AND CONTIGUOUS CONSTRUCTION PRIOR TO INSTALLATION OR REINSTALLATION. CONTRACTOR SHALL DETERMINE APPROPRIATE ANCHORING TYPES UNLESS OTHERWISE INDICATED.
 4. PATCHING: AFTER ALL REMOVALS OF WALLS, DOORS, WINDOWS, CEILINGS AND OTHER COMPONENTS, PATCH AND PREPARE THE REMAINING EXPOSED DAMAGED SURFACES TO PREPARE FOR NEW WORK AND NEW FINISH. INSTALL PIECED UNDERLAYMENT TO FLOORS AT WALL REMOVAL; INSTALL NEW WALLBOARD BY PIECING IN AND FINISHING FLUSH AND FRAMING OR FURRING AS NECESSARY; PIECE IN NEW CEILING SUSPENSION SYSTEM.
 5. CONCEALED SPACES: BUILDING DEFICIENCIES IN CONCEALED SPACES ARE NOT REQUIRED TO BE REPAIRED, EXCEPT AS REQUIRED TO MAINTAIN FIRE RATINGS, STRUCTURAL INTEGRITY, WATERPROOFING AND HEAT LOSS OR GAIN.
 6. PIPE REMOVALS: AFTER REMOVALS OF PIPING, RADIATORS, AND OTHER EQUIPMENT, REPAIR THE PIPE PENETRATIONS TO MATCH ADJACENT EXISTING SURFACE AND TO MAINTAIN RATINGS; FILL MOUNTING HOLES AND REPAIR WALL SURFACES.
- INSTRUCTIONS FOR RENOVATIONS:**
1. LEVEL EXISTING FLOORS TO RECEIVE NEW FINISHES AS INDICATED IN THE DRAWINGS- SEE INTERIOR FINISH SCHEDULE AND NOTES- AND SHALL BE CERTIFIED AS SUITABLE FOR THE NEW FINISHES BY THE INSTALLER PRIOR TO THE NEW WORK.
 2. COVER PLATES: PROVIDE COVER PLATES OVER ABANDONED ELECTRICAL DEVICES.
 3. FIRE EXTINGUISHERS: CONTRACTOR SHALL REMOVE EXISTING EXTINGUISHERS AND INSTALL THEM AFTER THEIR WORK. NEW EXTINGUISHERS AND CABINETS SHALL BE INSTALLED BY THE CONTRACTOR WHERE INDICATED.
 4. SIGNAGE: EXISTING PLAQUES AND OTHER INTERIOR SIGNS SHALL BE SALVAGED.

L12 GENERAL DEMOLITION NOTES


DOOR SCHEDULE

DOOR SCHEDULE ABBREVIATIONS																			
EHO	NO	NUMBER	WD	WOOD (SOLID)	HM	ES	ELECTRIC STRIKE	WG	WIRE GLASS	INS	TEMP	TEMPERED	STN	STAIN	MTL	THK	THICKNESS	PTD	PAINT
DOORS					FRAMES					SILL CONDITION		RATING		HARDWARE		DOORS			
NO	TYPE	SIZE	THK.	MAT.	FINISH	REMARKS	TYPE	MAT.	DETAILS	FINISH	REMARKS	MAT.	DETAILS					NO	
108A	A	36"x84"	1-3/4"	WD	STN		1	HM	H1	J1	PTD	NA	NA					HW2	108A
108B	A	(2) 24"x84"	1-3/4"	WD	STN		1	HM	H1	J1	PTD	NA	NA					HW3	108B
108C	A	24"x84"	1-3/4"	WD	STN		1	HM	H1	J1	PTD	NA	NA					HW3	108C
110A	B	36"x84"	1 3/4"	MTL	PTD	TEMPERED GLASS	1	HM	H1	J1	PTD	NA	NA					HW1	110A

G8 DOOR SCHEDULE


- EQUIPMENT SCHEDULE**
- 1 COUNTER (Ø 40" A.F.F.)
 - 2 GLOVE BOX, FREE STANDING (51"W X 33"D X 80"H)
 - 3 POWER HOOD, COUNTERTOP (44"W X 23"D X 44"H)
 - 4 SLAT WALL WITH ACCESSORIES - 30" H SIMILAR TO ANTE ROOM
 - 5 SLAT WALL WITH ACCESSORIES-FLOOR TO 7'-0" AFF
 - 6 LARGE INTEGRAL DOUBLE BASIN STAINLESS STEEL SINK AND BACKSPLASH WITH HAND SPRAYER, EYE WASH STATION AND ADA ENCLOSURE
 - 7 DISHWASHER, OWNER TO SUPPLY/GC TO INSTALL
 - 8 CHECK STATION WITH UNDER-SHELF LIGHT
 - 9 NOT USED
 - 10 REFRIGERATOR, OWNER TO SUPPLY/GC TO INSTALL
 - 11 FIVE (5) WIRE SHELVES
 - 12 OVEN, COUNTERTOP, ELECTRICAL REQUIREMENTS 208V
 - 13 WINDOW - 2'-6"W X 3'-0"H. FIELD VERIFY SIZE
 - 14 ONE (1) COAT ROD
 - 15 NOT USED
 - 16 CLOSET WITH HAT SHELF AND CLOTHES ROD FOR LABORATORY COATS
 - 17 LOCKERS, DOUBLE TIER, 12" X 18" X 36" (72" OVERALL), 6" ENCLOSED BASE AND SLOPED TOP
 - 18 APOTHECARY CUSTOM SHADE
 - 19 EYE WASH STATION
 - 20 WHITE MELAMINE BASE CABINETS W/ ROLL OUT SHELVES AND DRAWERS
 - 21 MOVABLE LIGHT FIXTURE
 - 22 OPEN FOR TRASH BELOW
 - 23 COMPUTER AND PHONE ON COUNTERTOP
 - 24 OPEN CABINET W/ SHELVES
 - 25 TEMPORARY CURTAIN FOR CHANGING ROOM BY GC
 - 26 GC TO INSTALL OWNER SUPPLIED SHELVING UNIT
 - 27 DOWN ROOM SHARE TO MEET ISO7 REQUIREMENTS
 - 28 HOT PLATE
 - 29 COMPUTER, LABEL MACHINE, CAPSULE, BALANCE/SCALE
 - 30 ONE-HALF WALL WITH CAP (SEE DETAIL W3/A16)
 - 31 WALL PHONE
 - 32 NEW WALL-MATCH EXISTING ADJACENT WALL IN TYPE AND CONSTRUCTION
- NOTES:**
1. EXPAND SOUND SYSTEM TO NEW NON-STERILE LAB 110.
 2. PROVIDE FIBERGLASS REINFORCED PANELS (FRP) AND ASSOCIATED TRIM PIECES FOR COMPLETE SYSTEM AT ALL WALLS IN COMPOUNDING LAB 105.
 3. NEW DOORS SHALL MATCH EXISTING DOORS EXCEPT DOOR 110A.
 4. POSITION DOOR 110A TO ALLOW FOR 8" SLAT WALL SHELVES BEHIND THE DOOR.
- LEGEND:**
- CONTINUOUS POWER STRIP ABOVE COUNTERTOP
 - SLAT WALL (REFER TO NOTES 3 & 5)
 - PEGS (BY ABD)
 - HORN STROBE - NEW
 - NEW PARTITION TO MATCH EXISTING
 - EXISTING PARTITION

A8 EQUIPMENT SCHEDULE

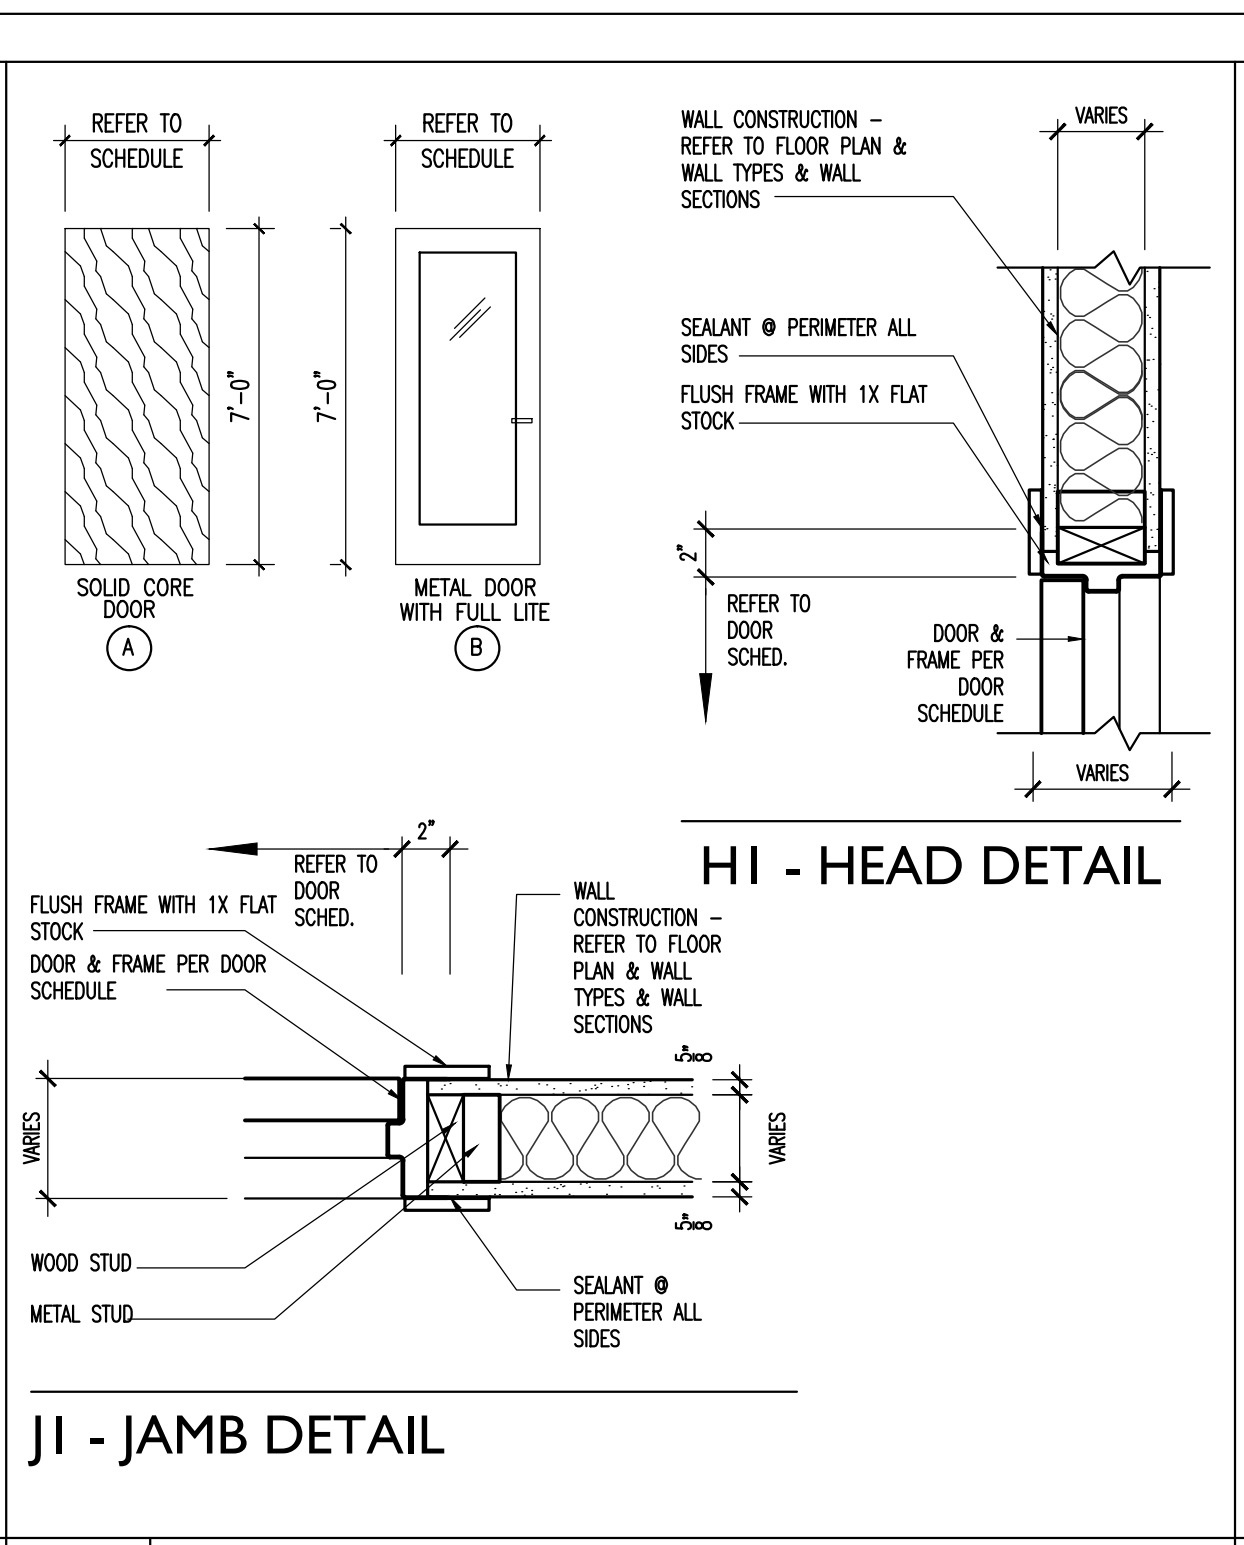


A12 DOOR TYPES & DETAILS

- INSTRUCTIONS FOR REMOVALS:**
1. CONTRACTOR IS RESPONSIBLE FOR SECURITY AND PROTECTION FROM DAMAGE AND WEATHER OF ANY EXPOSED BUILDING COMPONENTS RESULTING FROM DEMOLITION, REMOVALS AND NEW WORK.
 2. PLANS: SEE DEMOLITION PLANS FOR DEMOLITION WORK.
 3. VERIFY STRUCTURAL CONDITIONS WITH DRAWINGS AND ACTUAL CONDITIONS PRIOR TO WALL AND FLOOR REMOVALS. REPORT DISCREPANCIES TO ARCHITECT BEFORE PROCEEDING WITH WORK. CONTRACTOR IS RESPONSIBLE FOR SHORING AND OTHER TEMPORARY SUPPORT METHODS AS MAY BE NEEDED.
 4. REUSE/SALVAGE: GENERAL CONTRACTOR SHALL SALVAGE CERTAIN COMPONENTS FOR LIMITED REUSE TO MATCH EXISTING CONDITIONS TO PATCH AND REPAIR, INCLUDING: ALL LIFETY DEVICES AND EXIT SIGNS.
 5. SALVAGE FOR OWNER: PRIOR TO ANY AND ALL DEMOLITION, GENERAL CONTRACTOR SHALL MEET WITH OWNER'S REPRESENTATIVE TO DETERMINE REQUIRED SALVAGED ITEMS.
 6. MECHANICAL/ELECTRICAL/PLUMBING AND FIRE PROTECTION: DESIGN BUILD BY GENERAL CONTRACTOR/MANAGER.
 7. GENERAL CONTRACTOR TO PROVIDE A SECURE, DUST-FREE ENVIRONMENT DURING CONSTRUCTION WHILE TENANT OCCUPIES BALANCE OF SECOND FLOOR SPACE.
 8. IN AREAS WHERE NEW FLOOR COVERINGS/FINISHES ARE TO BE INSTALLED (SEE FINISH SCHEDULE), REMOVE ALL EXISTING FLOOR COVERINGS AND ASSOCIATED ADHESIVES, SOIL AND DEBRIS AND PREPARE EXISTING SUBFLOOR AS REQUIRED FOR SMOOTH AND LEVEL APPLICATION OF NEW FLOORING (SEE FINISH SCHEDULE).
 9. REMOVE CEILING GRILLES AND RETURNS WHERE NECESSARY, SALVAGE FOR REUSE.
 10. REMOVE AND SALVAGE EXISTING LIGHT FIXTURES FOR OWNER.
 11. ALL EXISTING LIFE SAFETY DEVICES TO REMAIN. ADJUST LOCATION WHERE NECESSARY. COORDINATE WITH ARCHITECT FOR RELOCATED DEVICES LOCATION. REFER TO PLANS FOR NEW DEVICES.
 12. ALL EXISTING SPRINKLER HEADS TO REMAIN. ADJUST LOCATION WHERE NECESSARY. COORDINATE WITH ARCHITECT FOR RELOCATED SPRINKLER HEADS LOCATION. DESIGN/BUILD BY GENERAL CONTRACTOR/MANAGER IN RENOVATED AREAS.

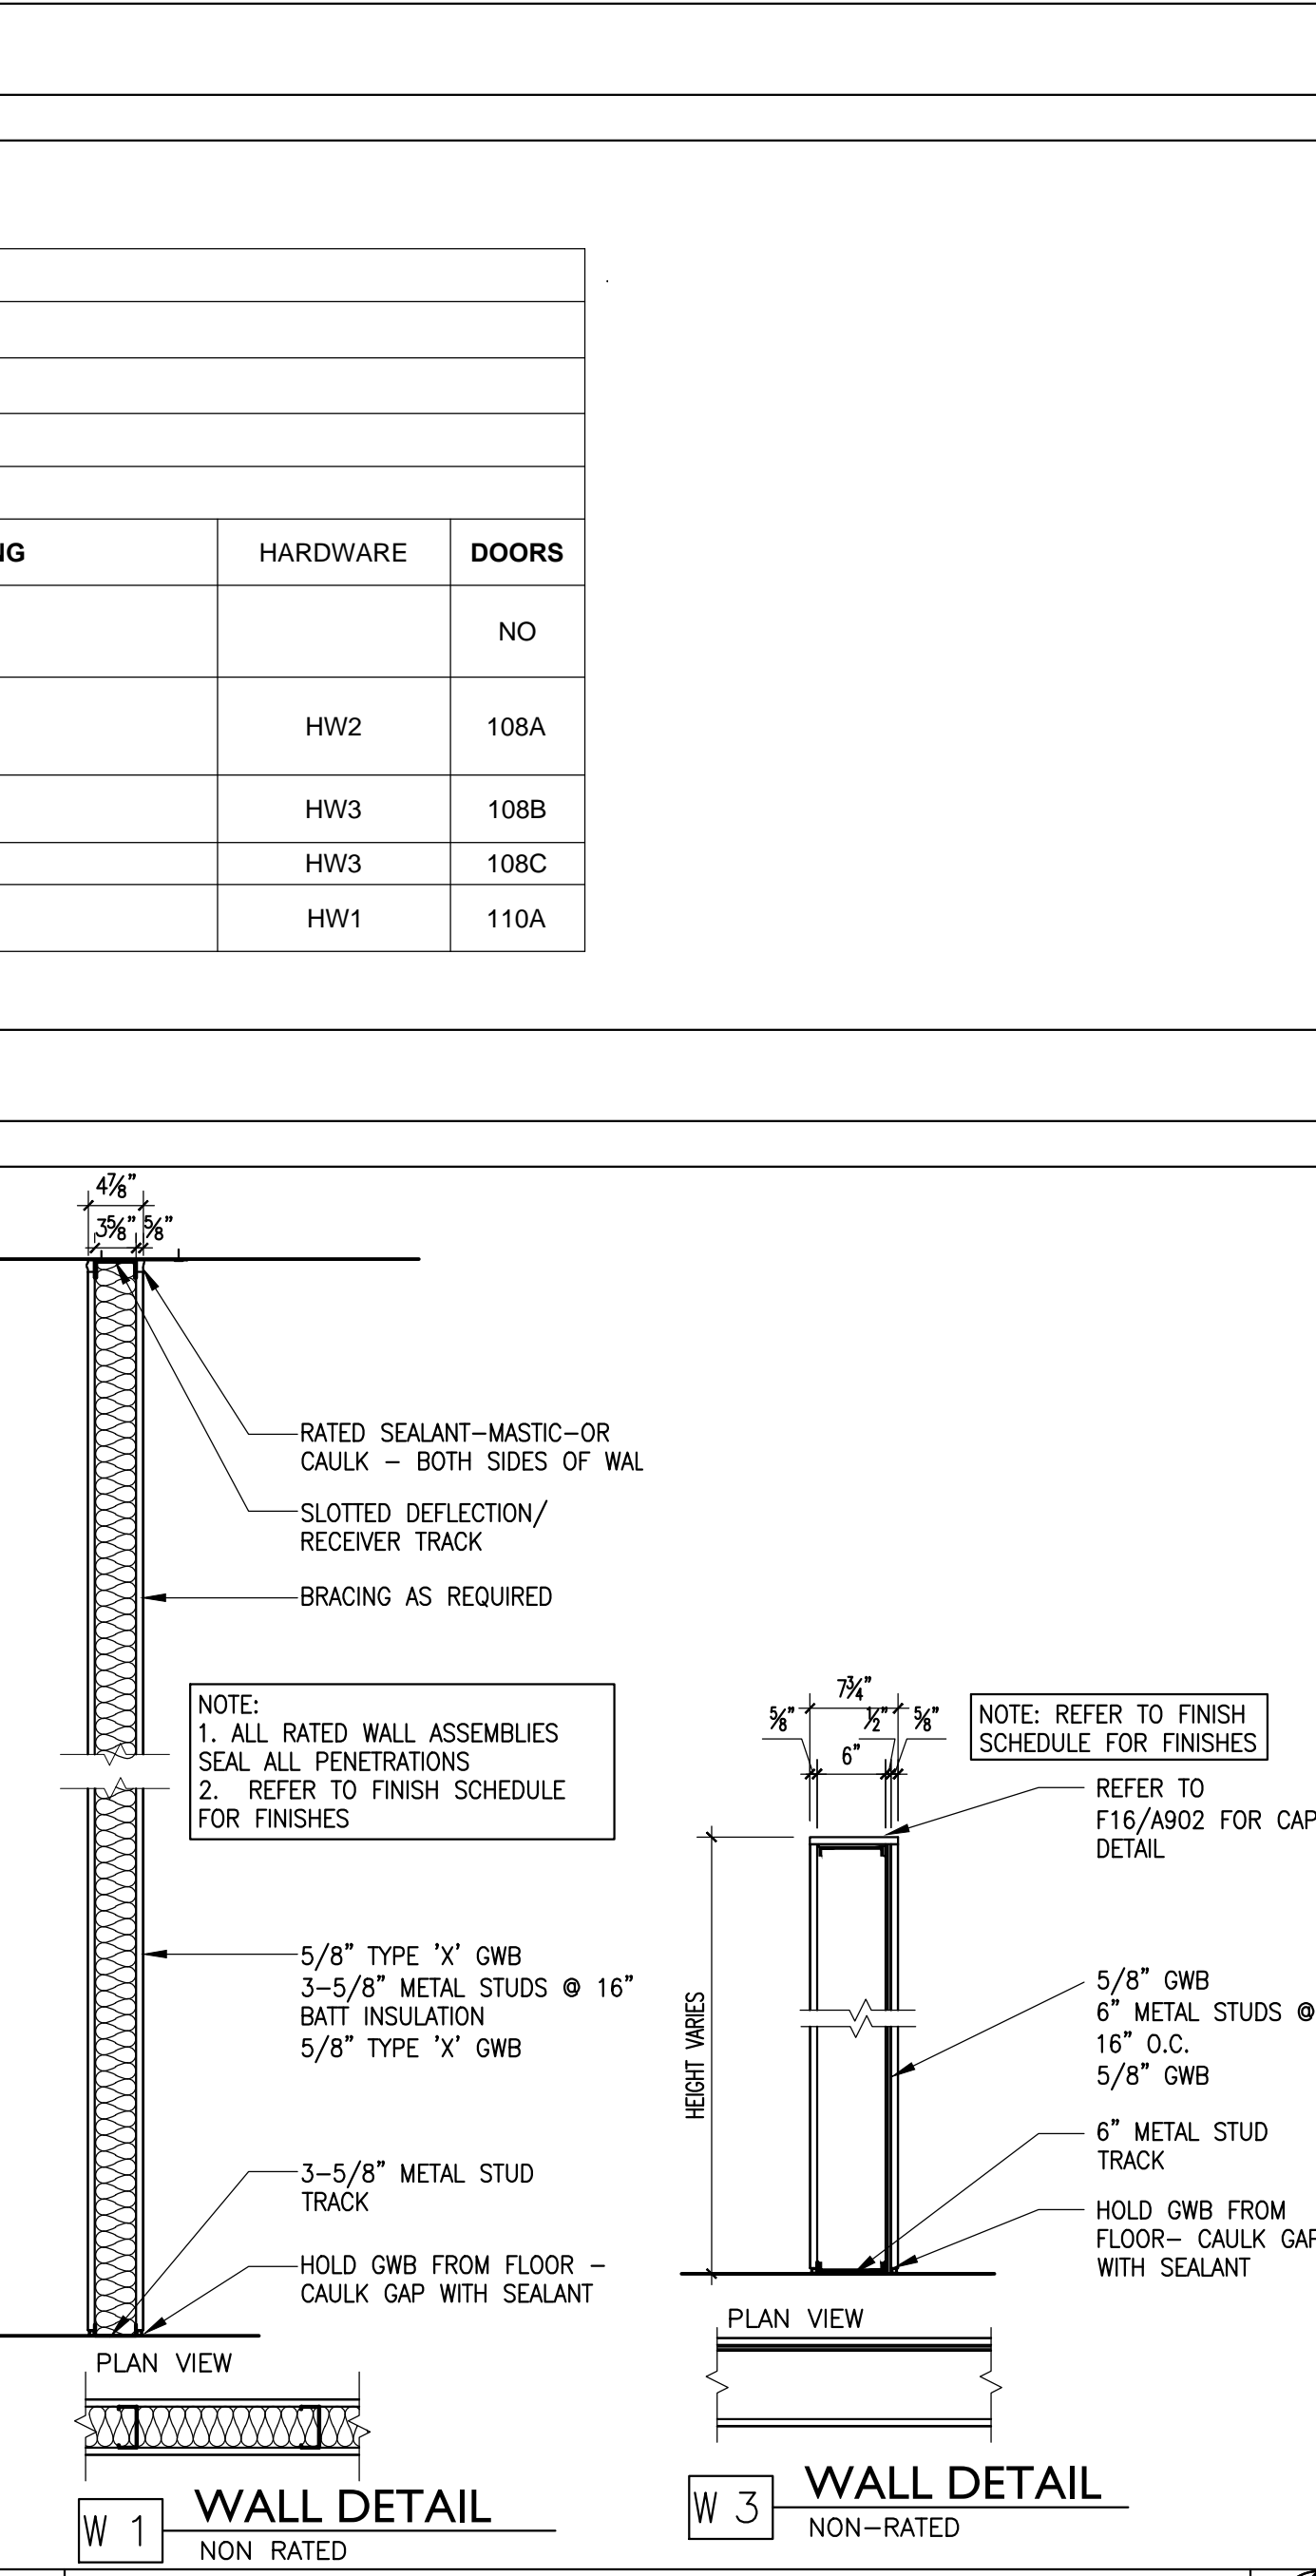

A16 WALL TYPES

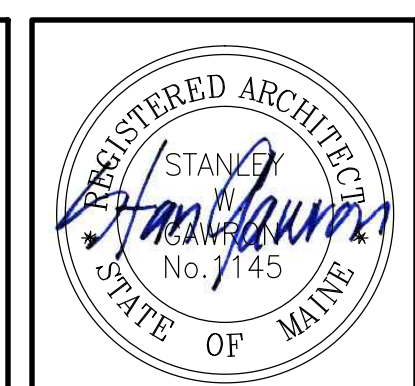

Gawron Turgeon ARCHITECTS
 29 Black Point Road
 Scarborough, Maine 04074
 www.gawronturgeon.com
 207-883-6307 / 207-883-0361 fax

APOTHECARY BY DESIGN
NON-STERILE COMPOUNDING LAB
141 PREBLE ST. PORTLAND ME

REVISIONS

#	DATE	DESCRIPTION

DATE: 9.21.15
 PROJECT #: 020115
 DRAWN BY: JME
 CHECKED BY: MET
 DRAWING SCALE: AS NOTED

SHEET TITLE
 FLOOR PLAN
 DEMOLITION PLAN
 REFLECTED CLG. PLAN
 EQUIPMENT SCHEDULE
 DOOR SCHEDULE

A101