


1 WINDOW TYPES  
1/4" = 1'-0"

WINDOW SCHEDULE									
KEY	ACTION	ROUGH OPENING (WH) VIF *	ROUGH OPENING SUBFLOOR	DETAILS			MATERIAL	FINISH	REMARKS
				HEAD	JAMB	SILL			
A	F	3'-0-1/2" X 6'-0-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN STOREFRONT WITH SUB SILL, TEMPERED INSULATED GLAZING UNITS	
B	F	6'-0-1/2" X 6'-0-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN STOREFRONT WITH SUB SILL, TEMPERED INSULATED GLAZING UNITS	
C	F	6'-0-1/2" X 7'-6-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN STOREFRONT WITH SUB SILL, TEMPERED INSULATED GLAZING UNITS	
D	F	3'-0-1/2" X 30'-4-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN CURTAINWALL WITH SUB SILL, SPANDREL GLASS, TEMPERED INSULATED GLAZING UNITS	
F	F	8'-0-1/2" X 6'-0-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN STOREFRONT WITH SUB SILL, TEMPERED INSULATED GLAZING UNITS	
I	F	12'-4-1/2" X 12'-10-1/2"	-	-	-	AL	PTD	THERMALLY BROKEN STOREFRONT WITH SUB SILL, TEMPERED INSULATED GLAZING UNITS	

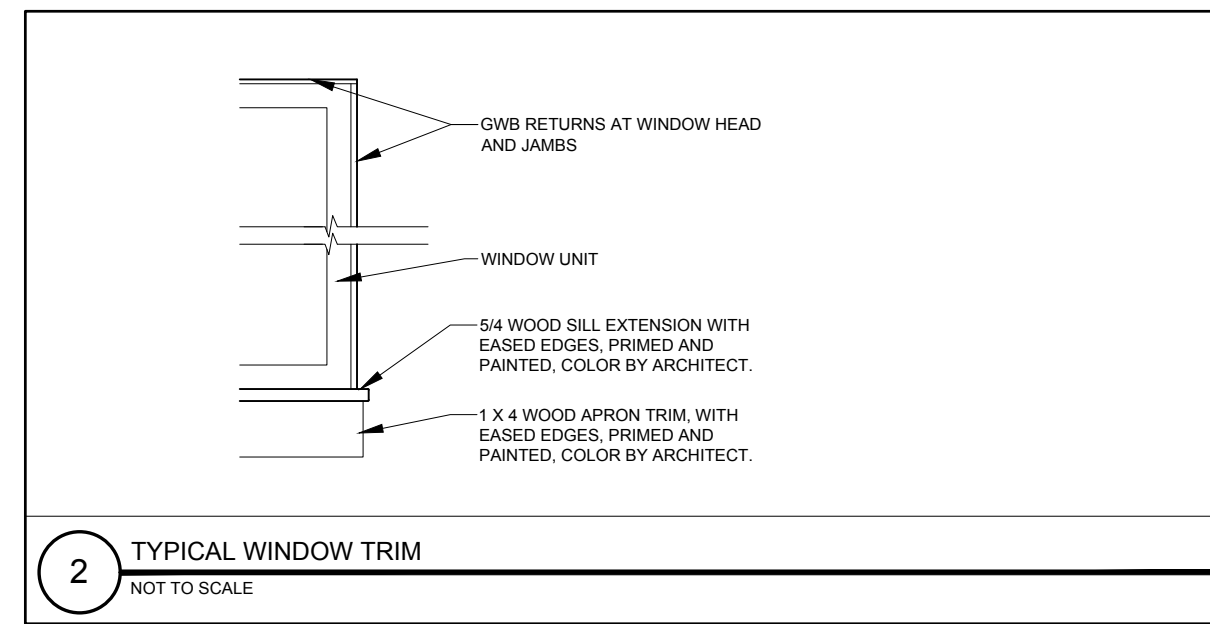

- WINDOW NOTES:
- COORDINATE AND ADJUST ROUGH OPENING DIMENSIONS TO ACCOMMODATE SILL PAN FLASHING SYSTEM
  - ALL WINDOW UNITS AND MULTI-WINDOW UNIT COMBINATIONS TO MEET OR EXCEED DP-50 RATINGS FOR BOTH STRUCTURAL AND WATER
  - PROVIDE MULL REINFORCING AT ALL MULTI-UNIT WINDOWS AS REQUIRED TO ACHIEVE DP-50 RATING, WITH INSTALLATION BRACKETS
  - ALL GLAZING LOCATED WITHIN 18" OF FINISHED FLOOR TO BE TEMPERED GLASS
  - ALL EXTERIOR GLAZING TO BE INSULATED
  - FRAME ALL OPENINGS WITH ELEVATIONS
  - SEAL WINDOW TO ROUGH OPENING WITH LOW EXPANDING FOAMINSULATION - SEE DETAILS

PROGRESS PRINT ONLY  
Not for Construction  
JUNE 09, 2015

ADDITION TO BAYSIDE BOWL  
ALDER STREET  
PORTLAND, MAINE



RYAN SENATORE ARCHITECTURE  
565 CONGRESS STREET  
PORTLAND, MAINE 04101  
207-650-6414  
senatorearchitecture.com

CONSULTANTS:  
STRUCTURAL: Structural Integrity  
77 Oak Street  
Portland, ME 04101  
207-774-4614

REVISIONS:

DATE: JUNE 09, 2015

PROJECT No. 1452

DRAWN BY: JPF / RRT / RJS

CHECKED BY: RJS

SCALE: AS NOTED

SHEET TITLE:  
WINDOW SCHEDULE