

**POWERPAY  
OFFICE FIT UP**

**Winton Scott  
Architects**  
5 Milk Street  
Portland, ME 04101

**Wright Ryan  
Construction, Inc.**  
10 Danforth Street  
Portland, ME 04101

**Becker Structural  
Engineers, Inc.**  
75 York Street  
Portland, Maine 04101

**Mechanical  
Systems  
Engineers**  
10 Royal River Center  
Yarmouth, Maine 04096

**Bartlett Design**  
942 Washington Ave.  
Bath, Maine 04530

**Fore Solutions**  
386 Fore Street  
Portland, Maine 04101

**SECOND FLOOR  
DEMOLITION  
PLAN**


**D1.2**

**DEMOLITION KEY NOTES**

1. EXISTING ELEVATOR SHAFT, CAB, CALL BUTTONS ETC. TO REMAIN. DECORATIVE WOOD SLATS ON SHAFT WALLS TO BE REMOVED.
2. EXISTING ELEVATOR MACHINE ROOM TO BE REMOVED. ALL EXISTING ELEVATOR EQUIPMENT TO BE SALVAGED AND PROTECTED FOR REINSTALLATION AT NEW LOCATION.
3. EXISTING DOOR AND FRAME TO BE REMOVED.
4. EXISTING STAIR, FIREPLACE, STONEWORK, BENCH AND INTEGRATED PARTITIONS TO REMAIN
5. REMOVE EXISTING STOREFRONT GLAZING, VESTIBULES, DOORS, GRANITE STEPS, HANDRAILS, EXTERIOR SOFFITS, GRANITE CLADDING, PAVING, AND STRUCTURAL ELEMENTS IN PREPARATION FOR NEW CONSTRUCTION SCHEDULED FOR THIS LOCATION.
6. EXISTING CONCRETE RAMP TO REMAIN. ENCLOSING INTERIOR PARTITIONS TO BE REMOVED.
7. NOT USED
8. EXISTING STAIR, ENCLOSING WALLS, HANDRAILS FROM BASEMENT TO MEZZANINE LEVEL TO REMAIN.
9. REMOVE PORTION OF EXISTING EXTERIOR WALL ASSEMBLY IN PREPARATION FOR INSTALLATION OF NEW WINDOWS.
10. ALL EXISTING BUILDING STRUCTURAL ELEMENTS TO REMAIN EXCEPT WHERE SPECIFICALLY DESIGNATED TO BE REMOVED ON STRUCTURAL DRAWINGS.
11. REMOVE FINISH CEILING AT UNDERSIDE OF EXISTING RAMPED MEZZANINE COMPLETE.
12. EXISTING WINDOW SHADES WITH ELECTRIC OPERATORS ARE TO REMAIN FOR REUSE- DO NOT REMOVE
13. REMOVE EXISTING METAL RAIL SYSTEM WITH WOOD PANELS AND WOOD CAP RAIL.
14. SEE STRUCTURAL FOR EXTENT OF STRUCTURAL REMOVALS AT MEZZANINE
15. ALL EXISTING ROOF TOP MECHANICAL EQUIPMENT IS SCHEDULED FOR REMOVAL. COORDINATE WITH MECHANICAL DRAWINGS AND CONSTRUCTION MANAGER
16. REMOVE PORTION OF EXISTING EXTERIOR WALL ASSEMBLY IN PREPARATION FOR INSTALLATION OF NEW DOOR AND FRAME.

**GENERAL DEMOLITION NOTES**

- A. EXTENT OF ALL DEMOLITION WORK WHETHER OR NOT SHOWN ON THIS PLAN SHALL BE COORDINATED WITH CONSTRUCTION MANAGER PRIOR TO START OF WORK.
- B. DO NOT UNDERTAKE ANY DEMOLITION WORK IN THE EXISTING BASEMENT AREA
- C. IN GENERAL, INTERIOR REMOVALS INCLUDE ALL INTERIOR PARTITIONS CEILINGS, DOORS, FRAMES, FLOOR FINISHES, AND REMAINING FOOD SERVICE EQUIPMENT AND VENDOR DISPLAY COMPONENTS.
- D. REMOVE ALL INTERIOR LIGHT FIXTURES AND SUPPORTING STRUCTURES.
- E. REMOVE ALL MECHANICAL EQUIPMENT AND DUCTWORK. REMOVAL OF MECHANICAL PIPING AND CONVECTORS SHALL BE COORDINATED WITH THE CONSTRUCTION MANAGER.
- F. COORDINATE SLAB REMOVALS AND TRENCHING WITH PLUMBING DRAWINGS, STRUCTURAL DRAWINGS, SLAB PLAN, AND CONSTRUCTION MANAGER.

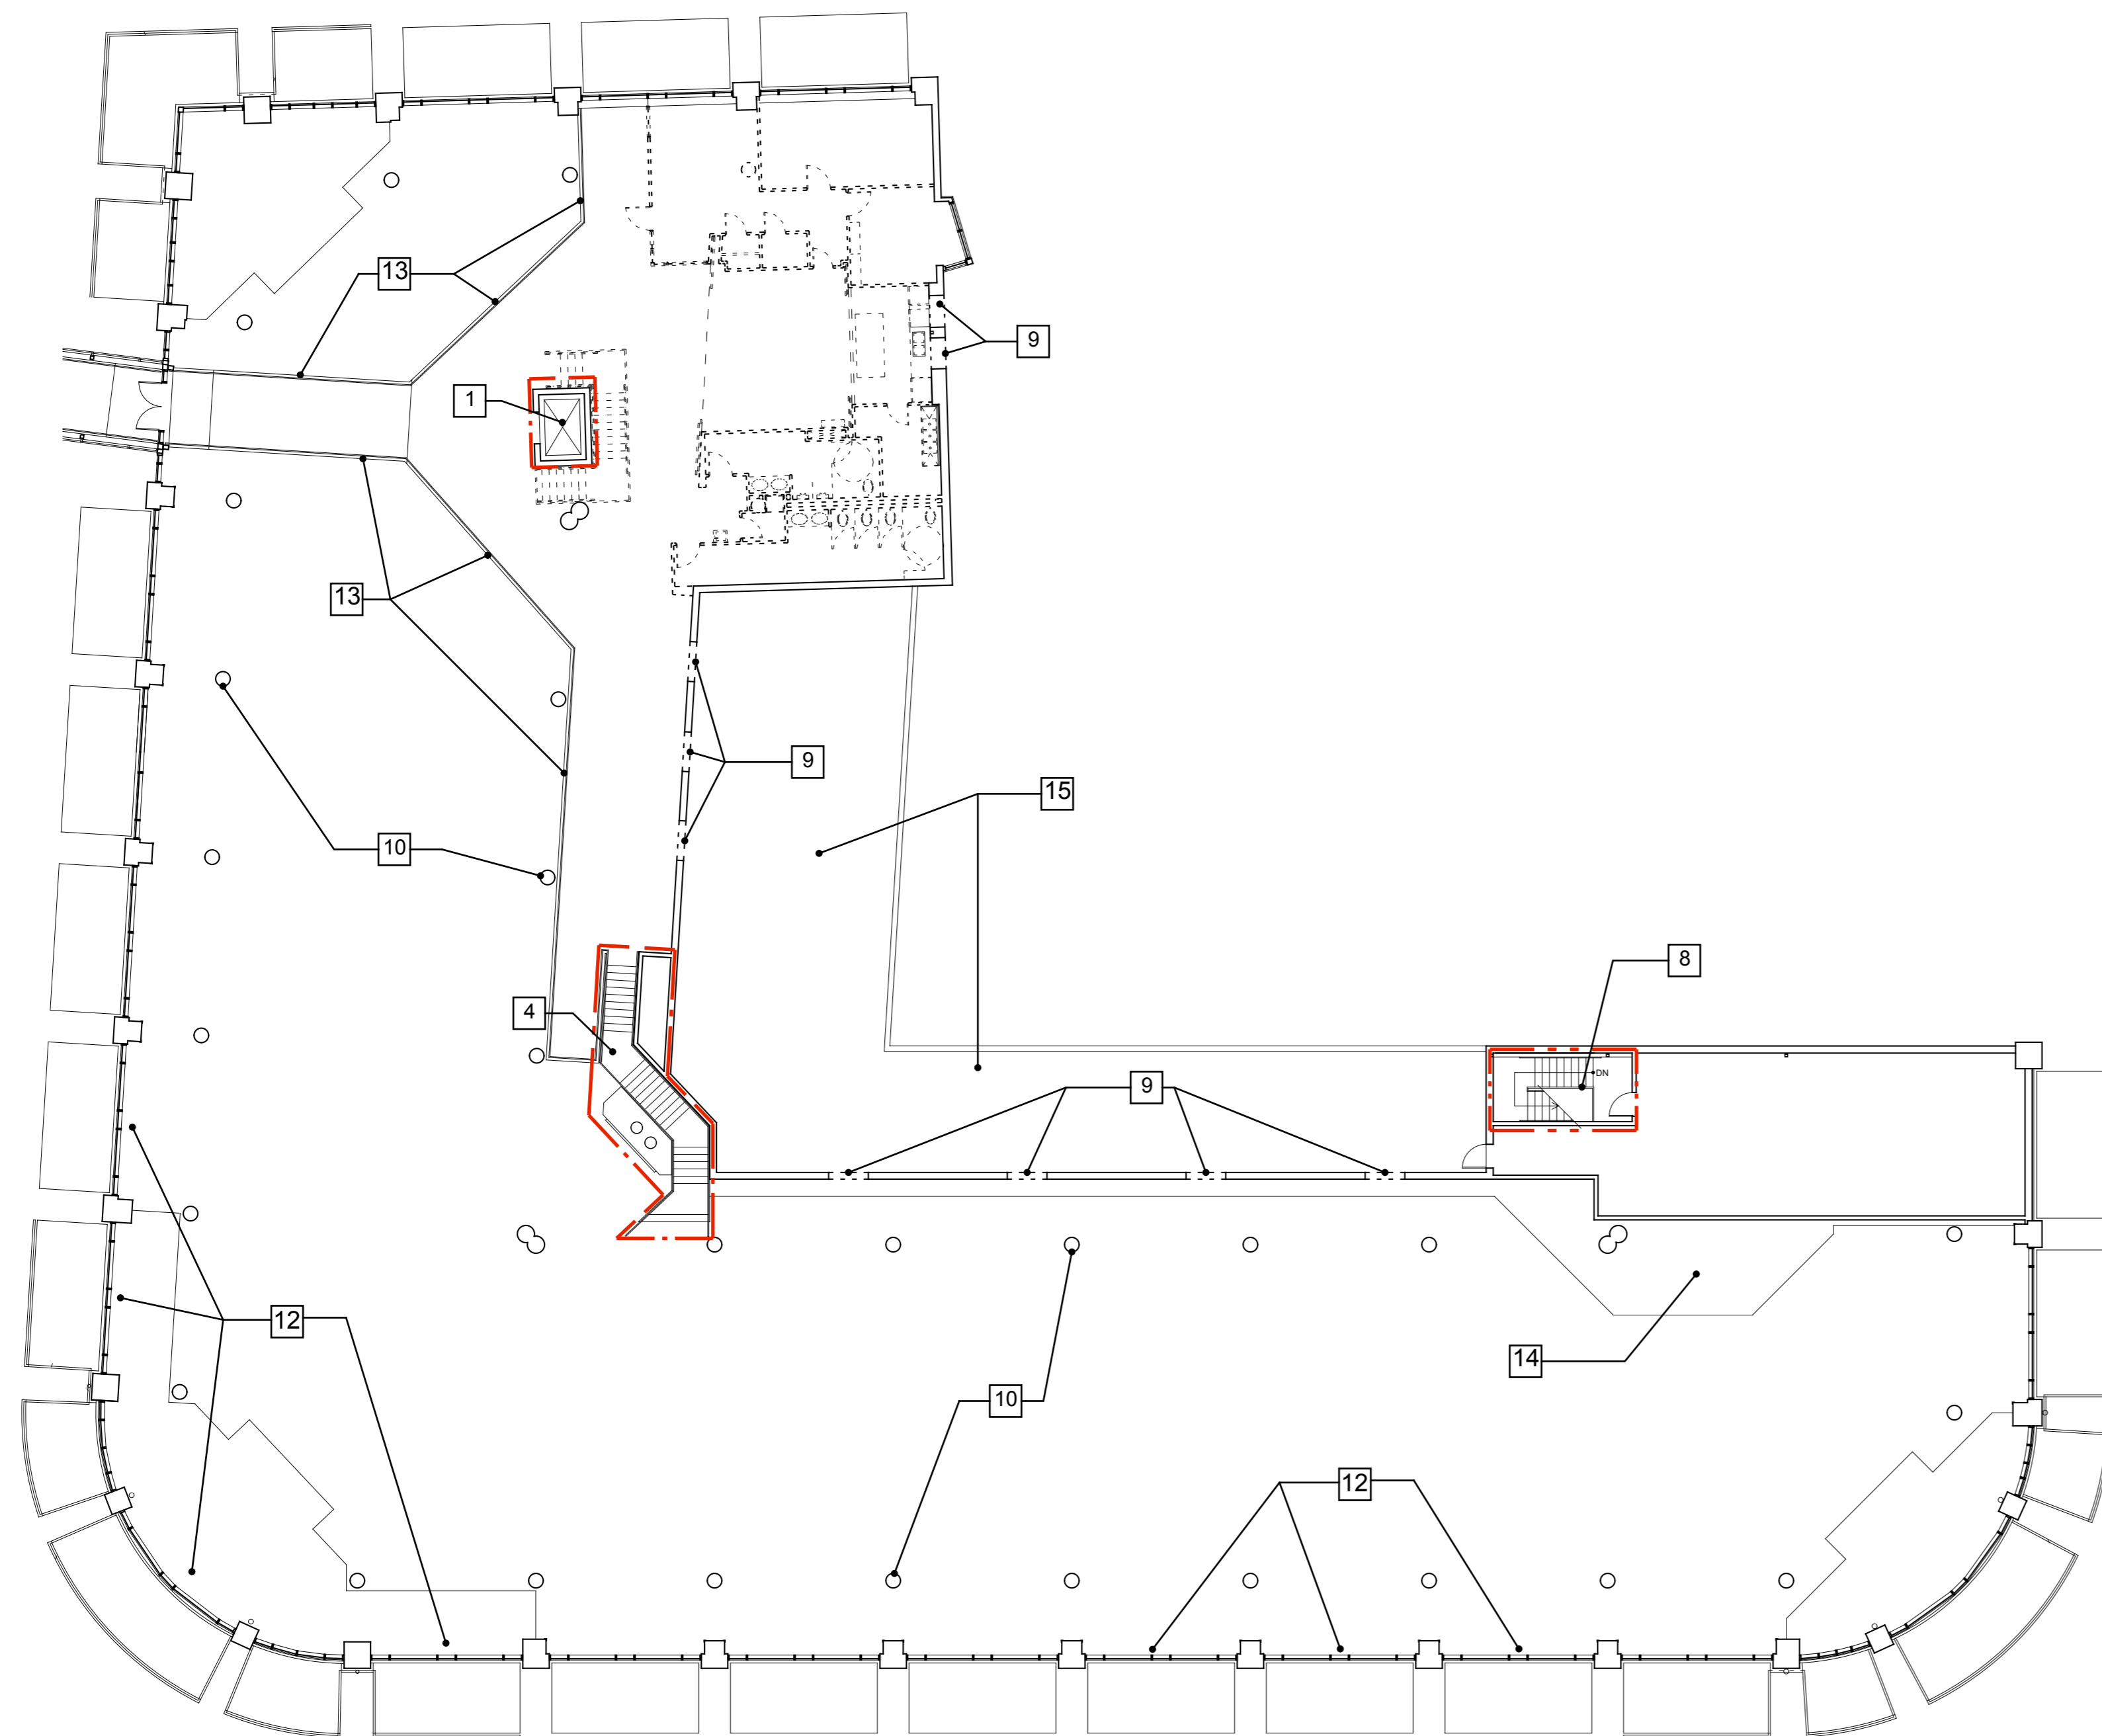

**SECOND FLOOR DEMOLITION PLAN**