

INSWING FRENCH DOOR

Inswing French Doors

MO (mm)
RO (mm)
Frame Size (mm)
DLO (mm)

2-6 13/16 (783)
2-7 5/16 (796)
2-6 5/16 (770)
2 11/32 (542)


2-8 13/16 (834)
2-9 5/16 (846)
2-8 5/16 (821)
23 11/32 (593)

3-0 13/16 (935)
3-1 5/16 (948)
3-0 5/16 (923)
27 11/32 (695)

6-7 3/4 (2026) 6-8 (2032) 6-7 1/2 (2019) 67 3/32 (1704)									
6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 69 19/32 (1768)									
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 73 19/32 (1869)									
7-11 3/4 (2432) 8-0 (2438) 7-11 1/2 (2426) 83 3/32 (2111)									

Inswing Door Operation

X signifies an operating door panel, O means stationary. Listing the panels in a door starts from the left to the right, looking from the exterior.

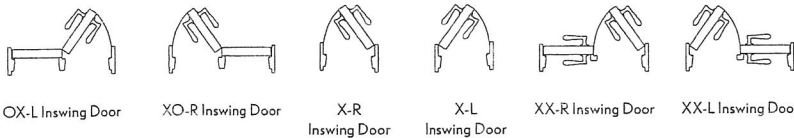

Details and Elevations not to scale.

O = Stationary X = Operator
L = Left Hand Panel R = Right Hand Panel

MULTIPLE ASSEMBLIES

Multiple assembly units can be factory mullered up to 3 units wide by 1 unit high, Maximum Rough Opening not to exceed 109 15/16" x 96"; or 2 units wide by 2 units high, maximum Rough Opening not to exceed 73 5/8" x 100 1/2". Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". True Half Round transoms are available field mullered only. Structural mullion reinforcement is required for some assemblies. Please consult your local Integrity® from Marvin® representative for more information.