## City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:		Phone:		Permit No:		
2 Park Ave	C.N. Brown						
Owner Address:	Lessee/Buyer's Name:	Phone:	Business	sName:			
	The Big Apple				Demoit to our		
Contractor Name:	Address:		hone:	00 0055	Permit Issue	±a:	
TAGR Corporation	P.O. Box 441 Sandwich, M	A 02563		88-3955	_		
Past Use:	Proposed Use:	COST OF W	URK:	PERMIT FEE:			
		\$		\$ 28.20	_		
		FIRE DEPT.		INSPECTION:			
			Denied	Use Group: Type:	7		
					Zone: CBL	-: 036-G-001	
Proposed Project Decoription		Signature:		Signature:	Zoning Appro		
Proposed Project Description:				S DISTRICT (P.A.D.)		Jvai.	
		Action:	Approved			Zone or Reviews:	
Erect Signage				vith Conditions:	□ Shoreland		
Diece bighage			Denied		] 🛛 Wetland		
					□ Flood Zo		
		Signature:		Date:	□ Subdivisi		
Permit Taken By: Mary Gresik	Date Applied For:	1000			⊔ Site Plan	n maj Om inor Om m D	
Mary Gresik		pril 1998			70	ning Appeal	
1. This permit application does not preclud	te the Applicant(s) from meeting applicable Sta	te and Federal ru	les		□ Variance		
	••		103.				
2. Building permits do not include plumb	ing, septic or electrical work.				Condition	Conditional Use	
3. Building permits are void if work is not	started within six (6) months of the date of issu	ance. False infor	ma-		□ Interpretation		
tion may invalidate a building permit a	nd stop all work					d	
					🗆 Denied		
					Histori	ic Preservation	
						□ Not in District or Landmark	
		Does Not Require Review					
						□ Requires Review	
					Action:		
	CERTIFICATION						
I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all						□ Appoved □ Approved with Conditions	
	able hour to enforce the provisions of the code	-		te the authority to enter a	Date:		
a cas covered of such permit at any reason		(-) approvide to t	raine			$\cdot$	
01 April 1998							
SIGNATURE OF APPLICANT Via Mail	ADDRESS:	DATE:		PHONE:	<u> </u>		
<b>RESPONSIBLE PERSON IN CHARGE OF</b>	WORK TITLE			PHONE:	-		
RESI SHOLDEL I ERSON IN CHARGE OF	WORK, IIILL				CEO DISTR		
Wh	ite-Permit Desk Green-Assessor's Cana	ry–D.P.W. Pink	-Public File	lvory Card-Inspector			

## RECEIVED MAR 3 0 1998

## SIGNAGE

1

PLEASE ANSWER ALL QUESTIONS

ADDRESSI 2 PARK AUE	ZONE: R-Z				
OWNERI THE BIG APPLE					
ASSESSOR NO.					
SINGLE TENANT LOT? YES V NO					
MULTI TENANT LOT? YESNO					
FREESTANDING EIGN? YESNO_NO					
MORE THAN ONE SIGN? YES NO	DIMENSIONS				
BLDG. WALL SIGN? YES $X$ NO (attached to bldg)	DIMENSIONS $2' \times 8' / '' = / 6^{\#}$				
MORE THAN ONE SIGN? YES NO	DIMENSIONS				
LIST ALL EXISTING SIGNAGE AND THEIR DIMENSIONS: 					
LOT FRONTAGE (FEET) 40 -119					
BLDG FRONTAGE (FEET) 30 119 X2 FUUT	R				
AWNING YES NO IS AWNING BACKL	IT? YES NO				
HEIGHT OF AWNING:					
IS THERE ANY COMMUNICATION, MESSAGE, TRADEMARK OR SYMBOL ON IT?					
A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE EXISTING AND NEW					
SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES AND/OR PICTURES OF THE					
PROPOSED BIGNS ARE ALSO REQUIRED.					

## **BUILDING PERMIT REPORT**

	DATE:	<u>ADDRESS: 2 Park AVE, \$36-G-\$\$</u> ON FOR PERMIT: <u>To Erect Signage</u> ING OWNER: <u>C, N, Brown</u>						
	REASC	ON FOR PERMIT: To Erect Signage						
	BUILDING OWNER: C, N, Brown							
	CONTRACTOR: TAGR. ConporaTion							
	PERM	TAPPLICANT: V19 MAIL						
	USE CI	$roup \_ SI9M_a = boca 1996 Construction type \_ $						
	blea 1996 CONSTRUCTION THPE							
	CONDITION(S) OF APPROVAL							
	This Permit is being issued with the understanding that the following conditions are met:							
	Approv	ved with the following conditions: $\frac{4}{429}$ .						
Å	_1. 2.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)						
	3.	Precaution must be taken to protect concrete from freezing.						
	4.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.						
	5.	Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)						
	6. <sup>°</sup>	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).						
	7.	Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.						
	8. 9. 10.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". Headroom in habitable space is a minimum of 7'6".						
	10.	11" tread. 7" maximum rise.						
	11.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8")						
	12.	Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as <u>means of egress or rescue</u> they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.						
	13.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.						
	14.	All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)						
	15.	The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.						
	16.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the						

•

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements


In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)


- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
- 24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- 26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
- 28. Please read and implement the attached Land Use-Zoning report requirements.

σf SIGN Shall begin 29. Crec/101 milled To This  $\sigma$ 30. 31.

32.

Enforcement Phot cc: Lt. McDougall RFD Marge Schmuckal

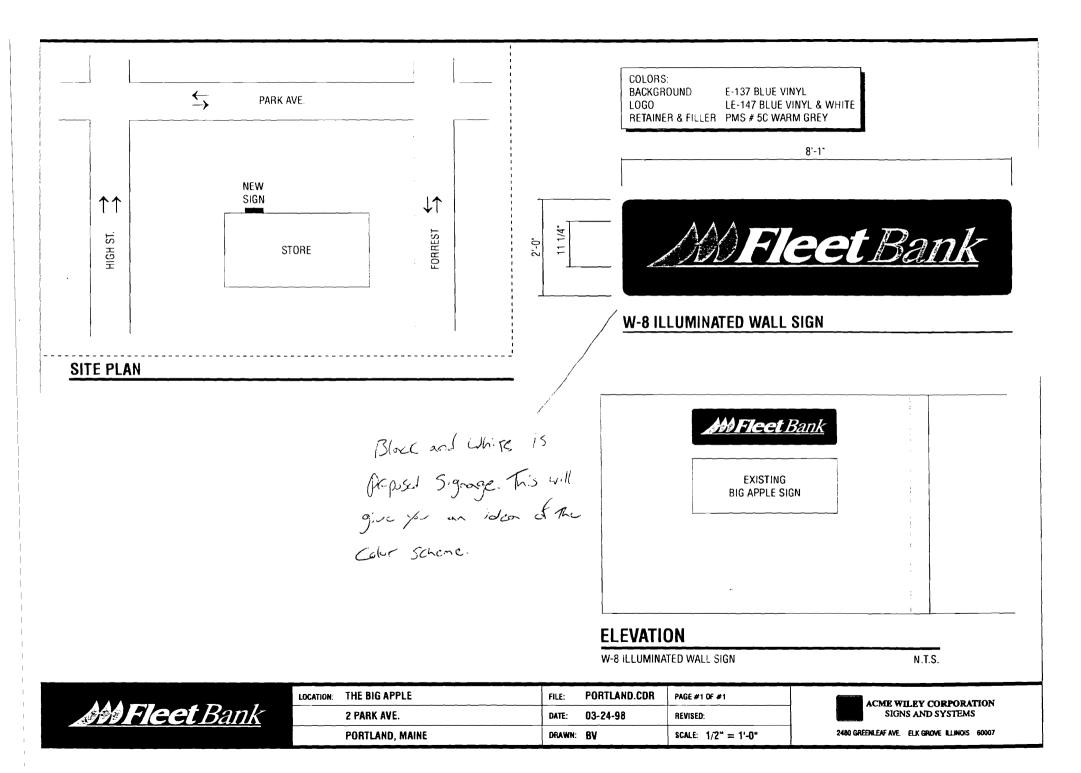

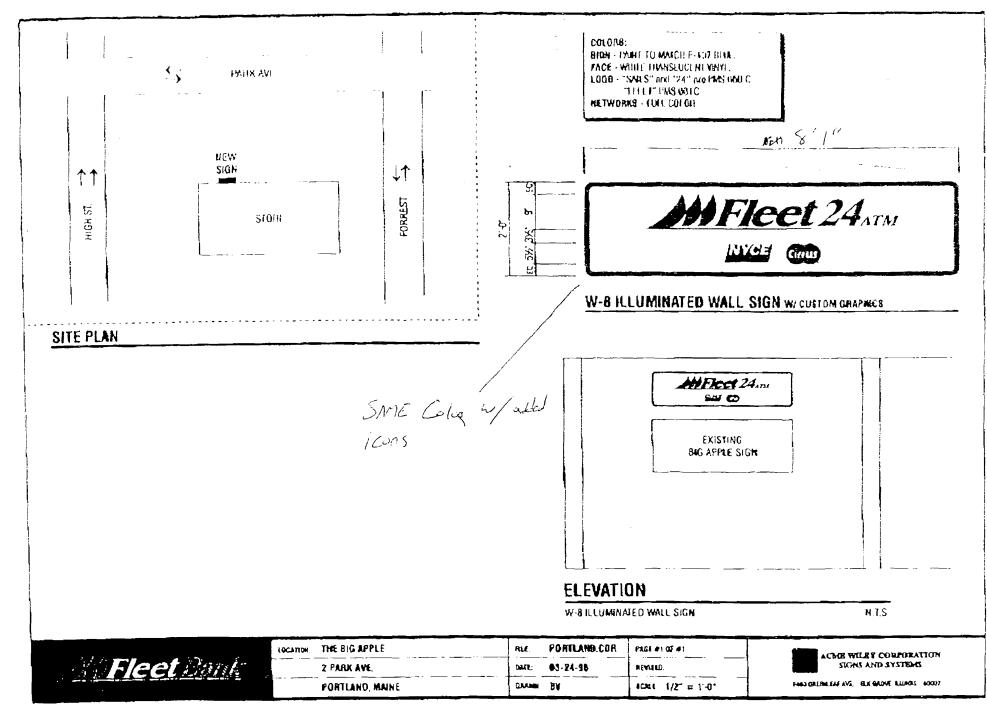

Ğ

1 C L

5

٦

Ċ

1 n n 12

5.5

FUN10 ---

-1X7

ACME WILEN

03/25/88