Location of Construction:	Owner:	Pho	one:	Permit No:
565 Congress St	Pachios,			_[
Owner Address:	Lessee/Buyer's Name:		sinessName:	
	Commercial & Industr		nant: The Clay Oven	Permit Issued:
Contractor Name: Signery	Address: Forest Ave Ptld	Phone 565	Congress St Ptl ME	remit issued.
Past Use:	Proposed Use:	COST OF WORK:	PERMIT FEE: \$ 25.80	
Restaurant	Same	FIRE DEPT. Approx Denied)	
		Signature:	Signature:	Zone: CBL: 037-A-038
Proposed Project Description:			ITIES DISTRICT (P.A.D.)	Zoning Approval:
•		Action: Approx	` ,	
		1	ved with Conditions:	Decial Luile of Neviews.
Erect Signage (2×2)		Denied		Denote and
				□ Flood Zone
		Signature:	Date:	□Subdivision
Permit Taken By: Mary Gresik	Date Applied For:	08 May 1997		☐ Site Plan maj ☐minor ☐mm [
				Zoning Appeal
1. This permit application does not preclude the	ne Applicant(s) from meeting applical	ble State and Federal rules.		☐ Variance ☐ Miscellaneous
2. Building permits do not include plumbing, septic or electrical work.			☐ Conditional Use	
3. Building permits are void if work is not started within six (6) months of the date of issuance. False informa-				□Interpretation
tion may invalidate a building permit and				□Approved
				☐ Denied
				Historic Preservation
				☐ Not in District or Landmark
				☐ Does Not Require Review
	,			☐ Requires Review
				Action:
	CERTIFICATION	J		□Appoved
I hereby certify that I am the owner of record of				
authorized by the owner to make this application				
if a permit for work described in the application				Date:
areas covered by such permit at any reasonable	hour to enforce the provisions of the	e code(s) applicable to such permit		Date.
, ,/	_			
lent		08 May 1997		
SIGNATURE OF APPLICANT Annud Gowd	a ADDRESS:	DATE:	PHONE:	-
CHANA				
DEGROVATRI E DEDGOVINI CALABOR CENTO	DRY TITLE		DUONE	_
RESPONSIBLE PERSON IN CHARGE OF WO	JKK, IIILE		PHONE:	CEO DISTRICT
White	-Permit Desk Green-Assessor's	Canary-D.P.W. Pink-Public Fi	le Ivory Card-Inspector	

BUILDING PERMIT REPORT

DATE: [3 MAY 97	ADDRESS: 565 Congress S	7
REASON FOR PERMIT: / garage	2X2 SIGNI	
BUILDING OWNER: Harold		
CONTRACTOR: Signery		
PERMIT APPLICANT:	APPROVAL: */ *26	DENIED_

CONDITION(S) OF APPROVAL


- ✓ 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 - 3. Precaution must be taken to protect concrete from freezing.
 - 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 - Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 - 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
 - 7. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
 - 8. Headroom in habitable space is a minimum of 7'6".
 - 9. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
 - 10. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 - Every sleeping room below the fourth story in buildings of use Groups R and 1-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 - 12. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 - 13. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
 - 14. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
 - All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

SKETCH OF THE

2 THECLAYOUEN 565 CONGRESSSI 207-1444 207-777-1444

2 22

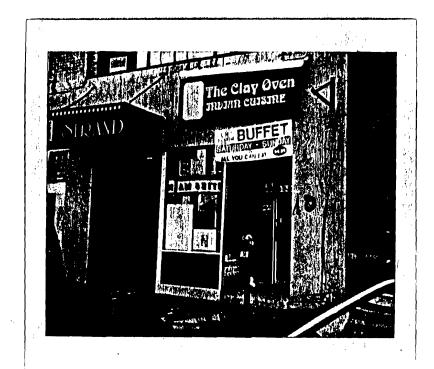

SIGNAGE

PLEASE ANSWER ALL OUESTIONS

ADDRESS: 563	Congress	St zone:	general managed billion and the second secon
OWNER:	RGHARAN SINGE	/	· ·
APPLICANT:	Juchara Si		
ASSESSOR NO. 1		The state of the s	
SINGLE TENANT LOT	YESNO	<u> </u>	
MULTI TENANT LOT?	Yesno	<u> </u>	
FREESTANDING SIGN (ex. pole sign)	YESNO	DIMENSIONS_	2×2
. Hore than on	GIGN? YES	NODIMENSION&_	
BLDG. WALL SIGH? (attached to bldq	YESNO	DIMENSIONS	A The second second
MORE THAN ON	sign? Yes	NODIMENSIONS	
LIST ALL EXISTENCE	signage and their dim	7X 1,5 7,5.	
TOT PROVINCE (PRE		William William Control Contro	145
j	(T) 10 JA		
AWNING YES	No X Is	AWNING BACKLIT? YES	NO
HEIGHT (F AWNING:		
IS THERE ANY COMM	NICATION, MESSAGE, TR	ADEMARK OR SYMBOL ON IT?	
A SITE SKETCH AND	BUILDING EKETCH BROMI	NG EXACTLY WHERE EXISTING	NEW DEW
SIGNAGE IS LOCATE	MUST BE PROVIDED. S	KETCHES AND/OR PICTURES	OF THE

PROPOSED SIGNS ARE ALSO REQUIRED.