

Notifier NFS-320 Fire Alarm Control Panel

Protected Premises: <u>380 Cumberland Avenue</u>	Date: <u>9/7/2016</u>
Address: <u>380 Cumberland Ave</u>	
City: <u>Portland</u> State: <u>ME</u>	Zip: <u>04101</u>
Prepared By: <u>Norris Inc.</u>	Phone: <u>207-883-3473</u>
Address: <u>2257 Broadway</u>	Email: _____
City: <u>South Portland</u> State: <u>ME</u>	Zip: <u>04106</u>

AC Branch Current Requirements 5.00 AMPS @ 120 VAC

Current required by source to power the fire alarm system.

Primary Standby Load 0.33 Amps

Current load on the primary power supply during **non-alarm** conditions.

Primary Alarm Load 0.74 Amps

Current load on the primary power supply during **alarm** conditions.

Secondary Load Requirements 10.67 Amp Hours

Total Secondary Load from the calculation table below.

Current Draw		Time (hours)	Total (AH)
Secondary Standby Load 0.368 A	x	Required Standby Time	
		24 hours	8.82
Secondary Alarm Load 0.777 A	x	Required Alarm Time (hours)	
		0.084 hours	0.07
Total Secondary Load			8.89
Derating factor			x 1.2
Secondary Load Requirements (Amp Hours)			10.67 AH

Battery Selection 18 Amp Hours


Select batteries from the list below.

18 AH BAT-12180 Battery (12 volt)

- Two Four (two 12VDC sets in parallel)

Battery Distribution Chart

Shows amp-hour distribution of your selections.

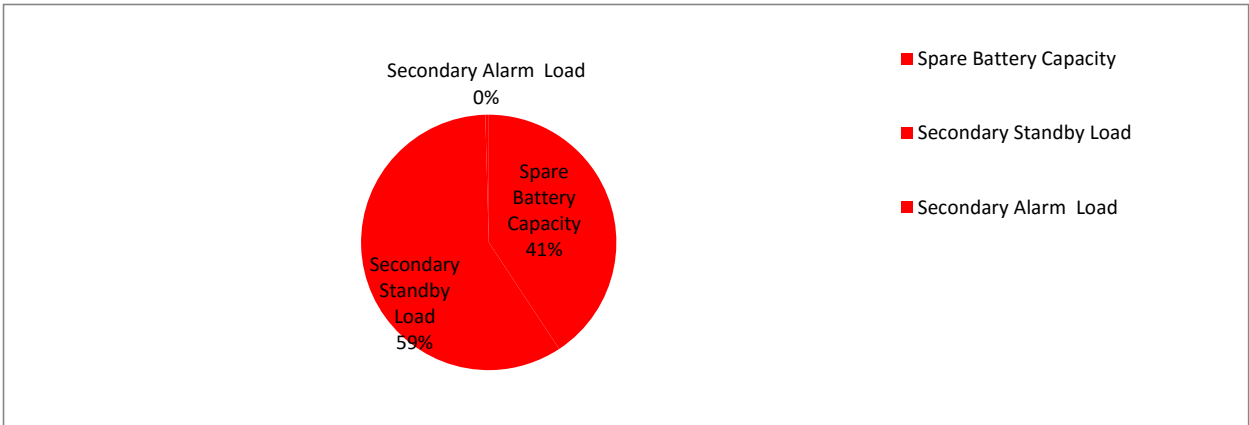

Comments

1. Batteries will fit in the FACP cabinet.
2. Selected battery size meets secondary load requirements.
3. The selected batteries (18AH) are within the charger range of this power supply (18-200AH).

Spare Battery Capacity	7.33	Battery Selection (AH) - Secondary Load Requirements (AH)
Secondary Standby Load	10.59	Secondary Standby Load (AH) * Derating Factor
Secondary Alarm Load	0.08	Secondary Alarm Load (AH) * Derating Factor