

Location of Construction: 511 Congress St- 5th flr		Owner: October Corp		Phone:		Permit No: 961100	
Owner Address: 100 Foden Rd-So Ptld ME04106		Leasee/Buyer's Name: Atlantic Bank		Phone: 761-3000		BusinessName:	
Contractor Name: Center Line Construction Inc		Address: Box 1264 Ptld ME 04104		Phone: 846-0042		<div style="border: 2px solid black; padding: 5px;"> PERMIT ISSUED Permit Issued: <div style="border: 1px solid black; padding: 5px; text-align: center;"> NOV - 7 1996 </div> CITY OF PORTLAND </div>	
Past Use: office building		Proposed Use: office bldg w intr renvtns		COST OF WORK: \$ 106,000 PERMIT FEE: \$ 550 FIRE DEPT. <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied INSPECTION: Use Group: B Type: 2B Signature: <i>H. 4/17/96</i> Signature: <i>H. 4/17/96</i>			
Proposed Project Description: interior renovations - 5th flr				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/> Signature: _____ Date: _____			
Permit Taken By: L Chase		Date Applied For: 11/4/96		Zone: B-3 CBL:		Zoning Approval: <i>OK 11/4/96</i> Special Zone or Reviews: <input type="checkbox"/> Shoreland <i>separate</i> <input type="checkbox"/> Wetland <i>Permits for</i> <input type="checkbox"/> Flood Zone <i>signature</i> <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	

1. This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT

ADDRESS:

DATE: *11/4/96*

PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE

PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

Zoning Appeal

- Variance
- Miscellaneous
- Conditional Use
- Interpretation
- Approved
- Denied

Historic Preservation

- Not in District or Landmark
- Does Not Require Review
- Requires Review

Action:

- Approved
- Approved with Conditions
- Denied

Date: *11/5/96*

D. Anderson

CEO DISTRICT

5

M.B. Jordan

BUILDING PERMIT REPORT

DATE: 11/6/94 ADDRESS: 511 Congress St 5th

REASON FOR PERMIT: Renovation

BUILDING OWNER: October

CONTRACTOR: Center Line

PERMIT APPLICANT: _____ APPROVAL: *14*15*16*17*18
DENIED: Fire *16*18

CONDITION OF APPROVAL OR DENIAL


1. Before concrete for foundation is placed, approvals from the Development Review coordinator and Inspection Services must be obtained. (A24 hour notice is required prior to inspection)
2. Precaution must be taken to protect concrete from freezing.
3. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
4. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1996)
5. Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A,B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
6. Headroom in habitable space is a minimum of 7'6".
7. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise.
8. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
9. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue, they shall

have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. feet.

10. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
11. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with selfclosers.
12. The boiler shall be protected by enclosing with one (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
13. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's building code Chapter 9, Section 19, 919.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 1. In the immediate vicinity of bedrooms
 2. In all bedrooms
 3. In each story within a swelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

14. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
15. The Fire Alarm System shall be maintained to NFPA #72 Standard.
16. The Sprinkler System shall be maintained to NFPA #13 Standard.
17. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1996)
18. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
19. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
20. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
21. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's Office.

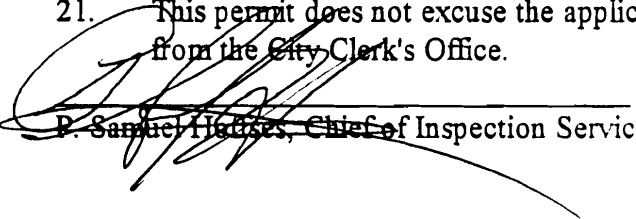
~~P. Samuel Higgins, Chief of Inspection Services~~ c.c. Lt. McDougall P. F. D.

FIRE CODE PERMIT REPORT

DATE: _____ ADDRESS: _____

PERMIT TO: _____


OWNER/CONTRACTOR: _____

APPROVED _____ DENIED _____

CONDITIONS OF APPROVAL/DENIAL

1. The boiler or furnace shall be protected by enclosing with one hour fire rated construction including fire doors and ceiling or by providing automatic extinguishment and smoke protected enclosure. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply system having a capacity sufficient to provide a 0.15 gpm, per square foot of floor throughout the entire area. An indicating shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
2. All required Fire Alarm Systems shall have the capability of "Zone Disconnect" via switches or key pad program provided the method is approved by the Fire Prevention Bureau.
3. All remote annunciators shall have a visible "trouble" indicator along with the Fire Alarm "Zone" indicators.
4. Any Master Box connected to the Municipal Fire Alarm System shall have a supervised Municipal Disconnect Switch.
5. All Master Box locations shall be approved by the Fire Department Director of Communications. A Master Box shall be located so that the center of the box is five feet above finished floor.
6. All Master Box locations are required to have a locked box (knoxbox).
7. A fire alarm acceptance report shall be submitted to the Portland Fire Department.
8. All underground tank removal(s) and/or installation(s) shall be done in accordance with the Department of Environmental Regulations (Chapter 691).
9. **No cutting of tanks on site.** Cutting of tanks is to be done at an approved tank disposal site.
10. Fire Dispatcher must be at least 48 hours in advance of removal and/or transportation of tanks.
11. All above ground L/P storage tanks shall be located in accordance with NFPA 58 Standards.
12. Any tank located near the path of vehicle movement shall be protected with appropriate permanent barricades.

13. All piping shall be protected from possible mechanical damage and vandalism.
14. A 4" storz fire department connection is required.
15. Any new sprinkler construction over six sprinkler heads needs to have State Fire Marshal approval.
16. Any renovations of sprinkler systems over 20 sprinkler heads needs to have State Fire Marshal approval.
17. A sprinkler performance test shall be submitted to the Portland Fire Department after completion of sprinkler work.
18. State Fire Marshal approval is required for this project.



Lt. G. McDougall
Fire Prevention Officer
City of Portland