

EXHAUST FAN INFORMATION - Job#2075277

FAN UNIT NDL	FAN UNIT MODEL #	CFM	ESP.	RPM	H.P.	Ø	VOLT	FLA	WEIGHT (LBS.)	SONES
1	DU33HFA	800	0.750	1538	0.333	1	115	4.1	107	10.8


FAN OPTIONS

FAN UNIT NDL	OPTION (Qty. - Descr.)
1	1 - Grease Box
	1 - Full Crating For Exhaust Fans
	1 - 3 Year Extended Motor Warranty
	1 - Wall Mount Construction For Fan
	1 - Hinge Kit - Ships Loose For Curb Supplied by Others
	1 - Fan Base Ceramic Seal - For Grease Ducts

FAN ACCESSORIES

FAN UNIT NDL	TAG	SUPPLY			
		EXHAUST	GRAVITY CUP	MOTORIZED DAMPER	WALL MOUNT
1					

FAN #1 DU33HEA - EXHAUST FAN

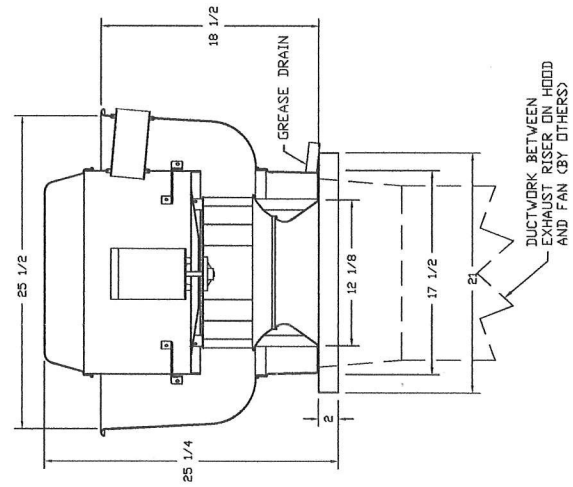

- FEATURES:**
- ROOF MOUNTED FANS
 - RESTAURANT MODEL
 - UL705 AND UL759
 - VARIABLE SPEED CONTROL
 - INTERNAL WIRING
 - WEATHERPROOF DISCONNECT
 - THERMAL OVERLOAD PROTECTION (SINGLE PHASE)
 - HIGH HEAT OPERATION 300°F (149°C)
 - GREASE CLASSIFICATION TESTING
- NORMAL TEMPERATURE TEST:**
 EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING GREASE VAPORS (316°C) UNTIL ALL FAN PARTS HAVE REACHED THERMAL EQUILIBRIUM AND WITHOUT ANY DETERIORATING EFFECTS TO THE FAN WHICH WOULD CAUSE UNSAFE OPERATION.
- ABNORMAL FLARE-UP TEST:**
 EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING BURNING GREASE VAPORS AT 600°F (316°C) FOR A PERIOD OF 15 MINUTES WITHOUT THE FAN BECOMING DAMAGED TO ANY EXTENT THAT COULD CAUSE AN UNSAFE CONDITION.

OPTIONS

- GREASE BOX
- FULL CRATING FOR EXHAUST FANS
- 3 YEAR EXTENDED MOTOR WARRANTY
- WALL MOUNT CONSTRUCTION FOR FAN
- HINGE KIT - SHIPS LOOSE FOR CURB SUPPLIED BY OTHERS
- FAN BASE CERAMIC SEAL - FOR GREASE DUCTS

CUSTOMER APPROVAL TO MANUFACTURE:

Approved as Noted

Approved with NB Exception Taken

Revise and Resubmit

SIGNATURE _____

Your Title _____

Date _____

CAPTIVE AIR

JOB Cupcakes
 LOCATION Lewiston, ME,
 DATE 6/24/2014
 JOB # 2075277
 DWG # 2 DRAWN BY BFC-21
 REV. SCALE 3/8" = 1'-0"