


DEMOLITION NOTES

1. THE CONTRACTOR SHALL PERFORM A SITE WALK-THROUGH WITH SUB-CONTRACTORS PRIOR TO SUBMITTING BIDS.
2. THE CONTRACTOR IS RESPONSIBLE FOR DEMOLITION SCOURING, METHODS, AND TECHNIQUES.
3. SALVAGE DEVICES THAT MEET CURRENT CODE SUCH AS, FIRE ALARM CALL BOXES, PULL STATIONS, EXTINGUISHERS, STROBES, LIGHTED EXIT SIGNS FOR REUSE.
4. ANY DAMAGE TO EXISTING WORK WHICH IS NOT SCHEDULED FOR REMOVAL OR REPAIRMENT SHALL BE REPAIRED AND/OR REPLACED AT THE CONTRACTOR'S EXPENSE. IF CAUSED BY THE CONTRACTOR'S OPERATIONS UNDER THIS CONTRACT, OWNER AND THE LANDLORD WILL HAVE SOLE DISCRETION AS TO WHETHER AN ITEM IS REPAIRED OR REPLACED.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF ALL DEMOLITION MATERIALS FROM THE SITE, LEAVING A CLEAN SWEEP SPACE. THE CONTRACTOR SHALL FOLLOW ALL BUILDING AND OWNER'S RULES AND REGULATIONS FOR WORKING HOURS, SCHEDULING ELEVATORS AND DUMPSTER RULES.
6. ANY WORK INVOLVING ALTERATIONS TO EXISTING BUILDING UTILITIES & WHICH REQUIRE UTILITY SHUT DOWN, SHALL BE COORDINATED WITH THE LANDLORD & OWNER AND SHALL REQUIRE A MINIMUM OF FIVE (5) DAYS NOTICE.
7. CONTRACTOR SHALL PROVIDE AND IS SOLELY RESPONSIBLE FOR REMOVAL AND REPAIRMENT OF ALL ITEMS REQUIRED BY THE FEDERAL, STATE & LOCAL REGULATIONS DURING CONSTRUCTION.
8. REMOVE EXISTING CONSTRUCTION AS SHOWN ON DRAWINGS, WHICH INCLUDE, BUT SHOULD NOT BE LIMITED TO PARTITIONS, DOORS, WALLS, FLOORS, CEILING, ROOFING, FINISHES, FINISHES, CEILING ASSEMBLY, FINISH CARPENTRY, FLOORING FINISHES, LIGHTING FIXTURES AND SWITCHING, ELECTRICAL OUTLETS, TELE-DATA OUTLETS AND ELECTRICAL POWER DISTRIBUTION SYSTEM BACK TO MAIN PANEL.
9. REMOVE AND DISPOSE OF CEILING TILE AND GRID @ AREAS TO RECEIVE NEW CEILING TILE AND GRID OR AS NOTED IN DRAWINGS.
10. CUT AND CAP EXISTING DISCONTINUED CONDUITS AND OTHER MISC. ITEMS THAT PENETRATE THE FLOOR, FILL Voids/HOLES IN SLAB TO MAINTAIN RATING @ FLOOR.
11. REMOVE ALL CARPET & WALL BASE IN OPEN AREAS CONF. ROOM.
12. REUSE EXISTING 2X2 RECESSED LIGHTING - 307,309,310

DEMOLITION LEGEND

- EXISTING PARTITIONS TO REMAIN
- - - - - EXISTING PARTITIONS TO BE DEMOLISHED.
- ⌋ DOORS:
D'-EXISTING TO DEMO
R'-EXISTING FOR REUSED IN NEW LOCATION


B1 NOTES & LEGEND

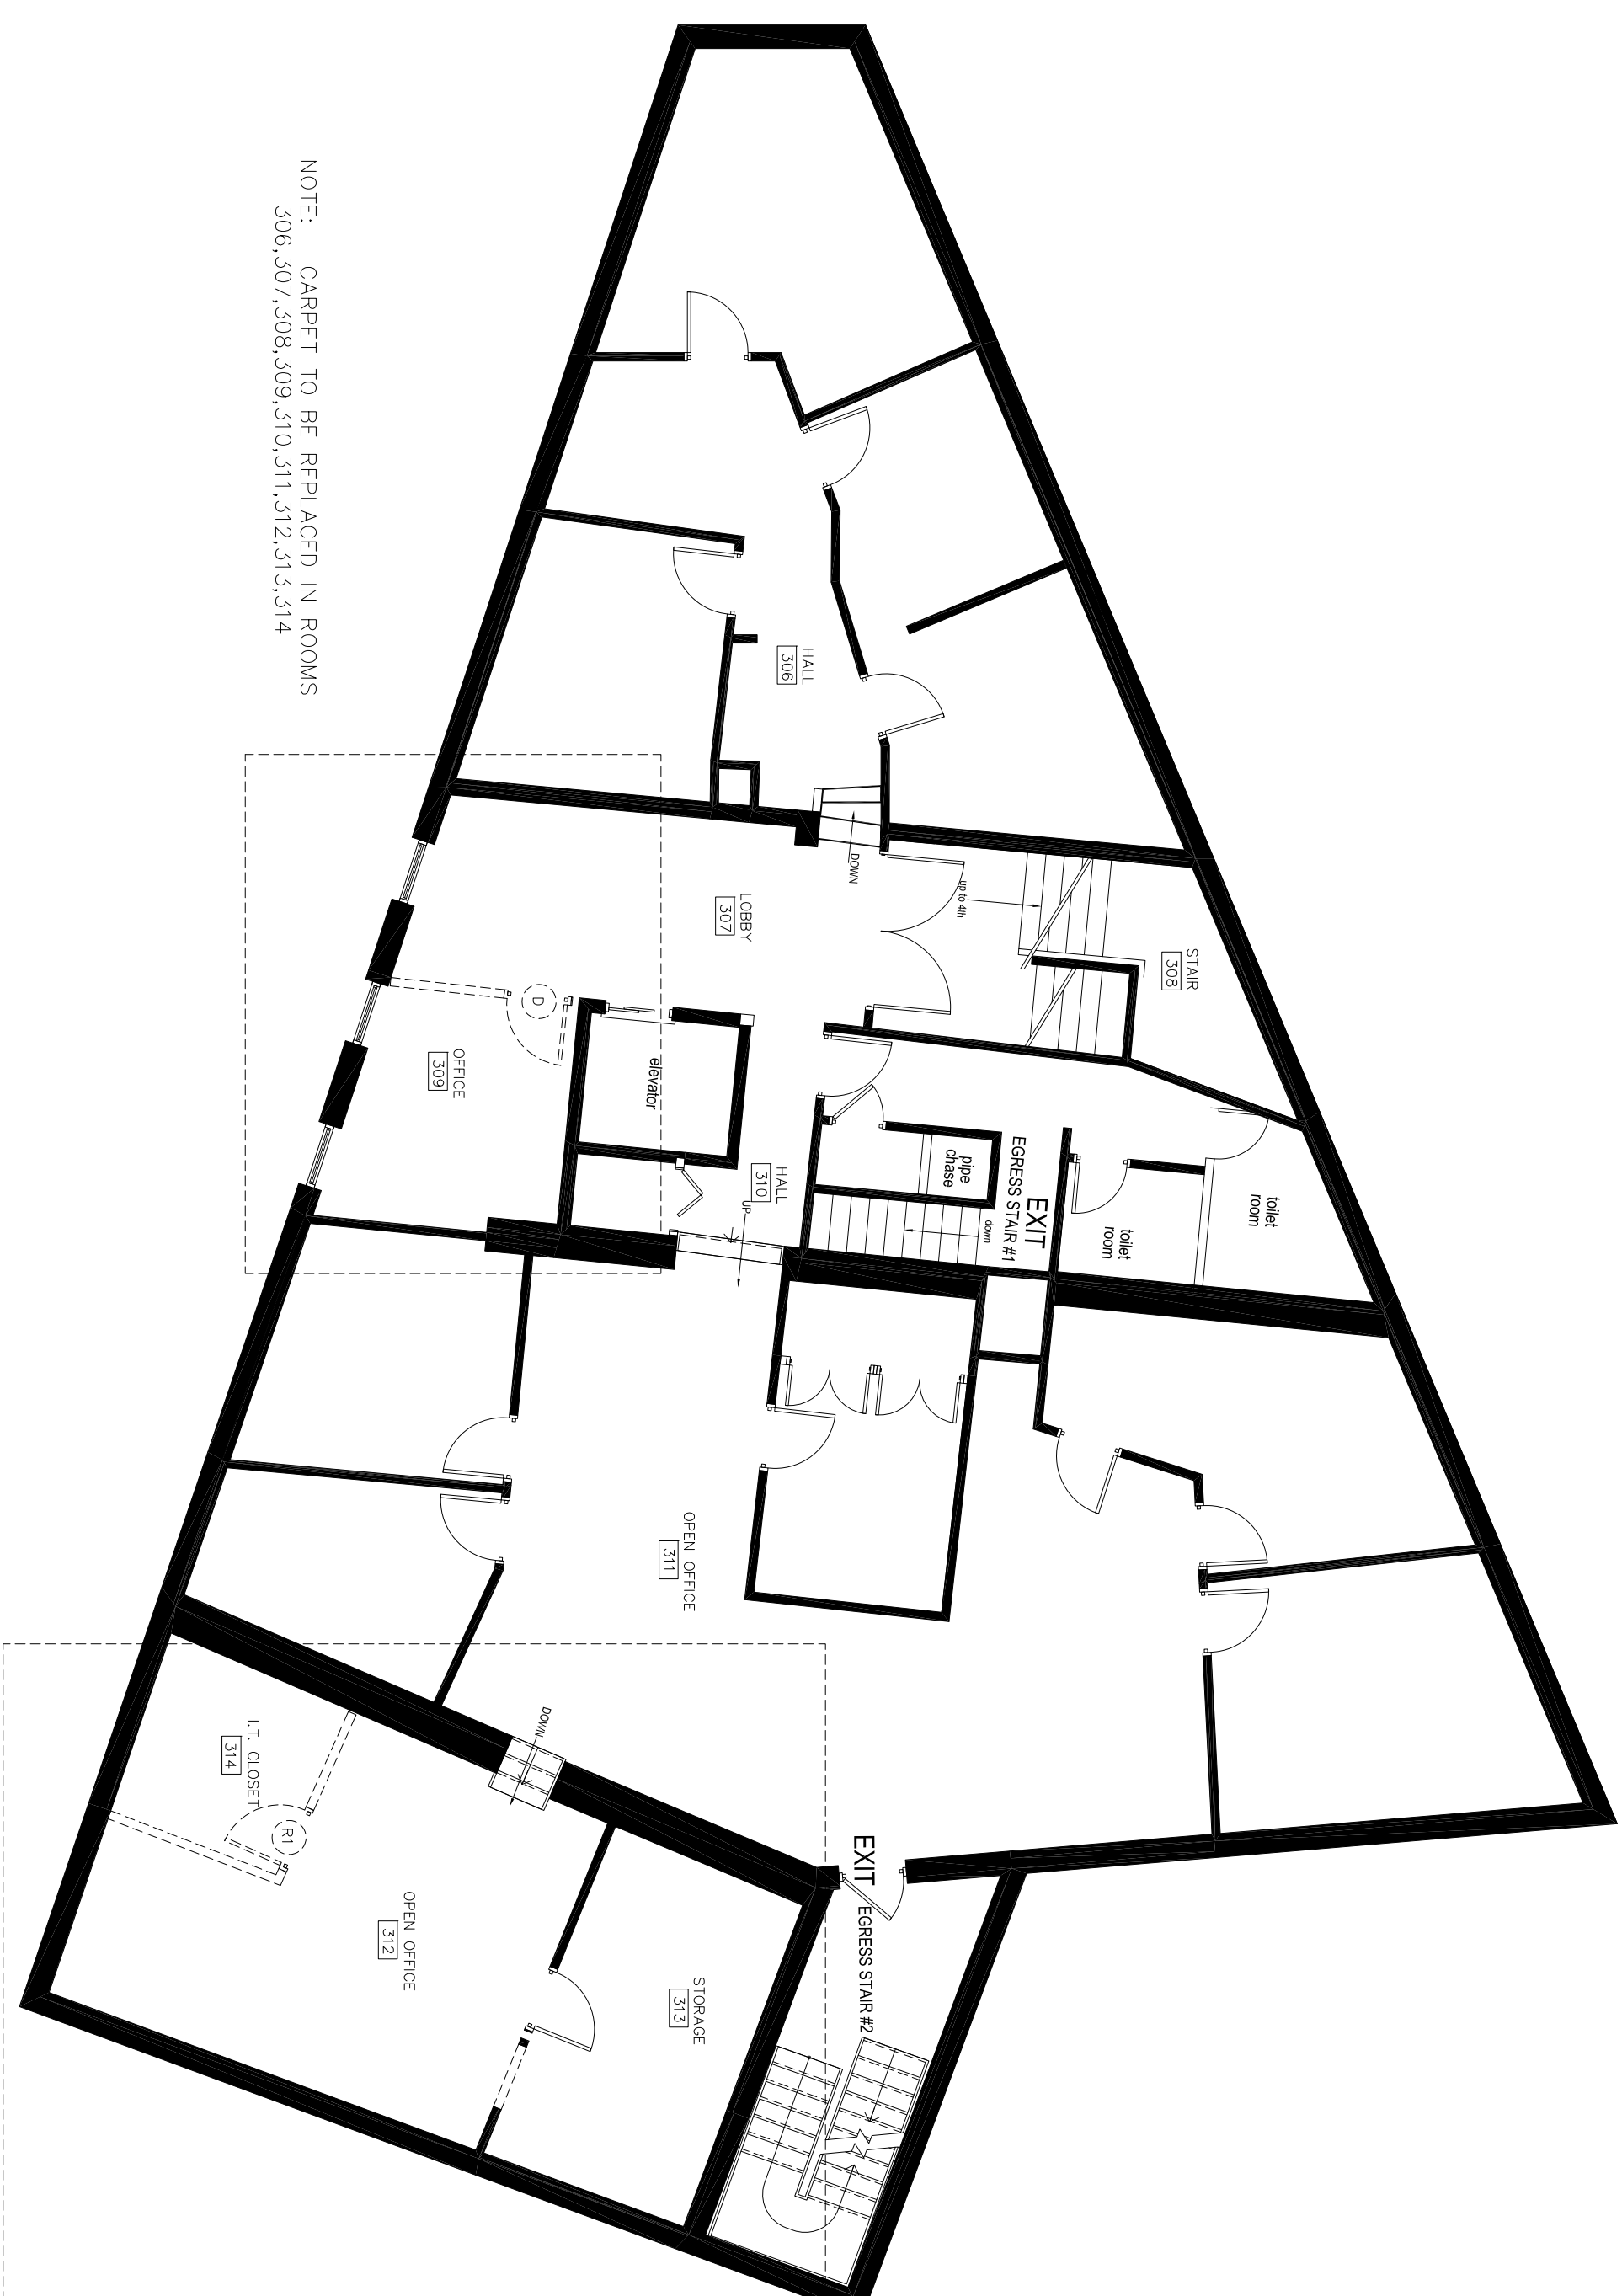

NOTE: CARPET TO BE REPLACED IN ROOMS 306,307,308,309,310,311,312,313,314

A1 3RD FLOOR DEMO PLAN
1/8" = 1'-0"

NO	DATE	REVISIONS



RM DAVIS
24 CITY CENTER
PORTLAND, ME

TITLE
3RD.FLOOR
DEMO
PLAN

SCALE
1/8"=1'-0"

145 SPRINGFIELD ST.
SCARBOROUGH, ME
P. (207) 468-9590

DATE: 1/14/16

DRAWN BY: JAT

CHECKED BY: JC

A003

14-701