


1  
S2.1

BASE BID - NORTH ELEVATION OF ORNAMENTAL ENTRY GATE AND GRANITE PIERS AT CONGRESS STREET  
1/2" = 1'-0" (ON 22 X 34 SHEET)

- GENERAL NOTES - GRANITE ENTRY PIERS
1. LIFT, SHIM AND REPOSITION ENTIRE PIER ASSEMBLY TO SQUARE AND PLUMB.
  2. FLASH JOINTS BETWEEN GRANITE BLOCKS WITH 2" WIDE, 20 OZ. LEAD.
  3. ASSUME PAINT REMOVAL AT 20% OF GRANITE SURFACE AREA AT MIDDLE 1, MIDDLE 2 AND LOWER BLOCKS.
  4. ASSUME RUST REMOVAL AT 10% OF GRANITE SURFACE AREA AT MIDDLE 1, MIDDLE 2 AND LOWER BLOCKS.
  5. GRIND OUT FERROUS MATERIAL AT DETERIORATED ANCHORS. SEE DETAILS 1 & 2 SHEET S-2.4.
  6. SEE SHEETS S-3.1 THROUGH S-3.4 FOR INDIVIDUAL PIER TREATMENT SCHEDULES.

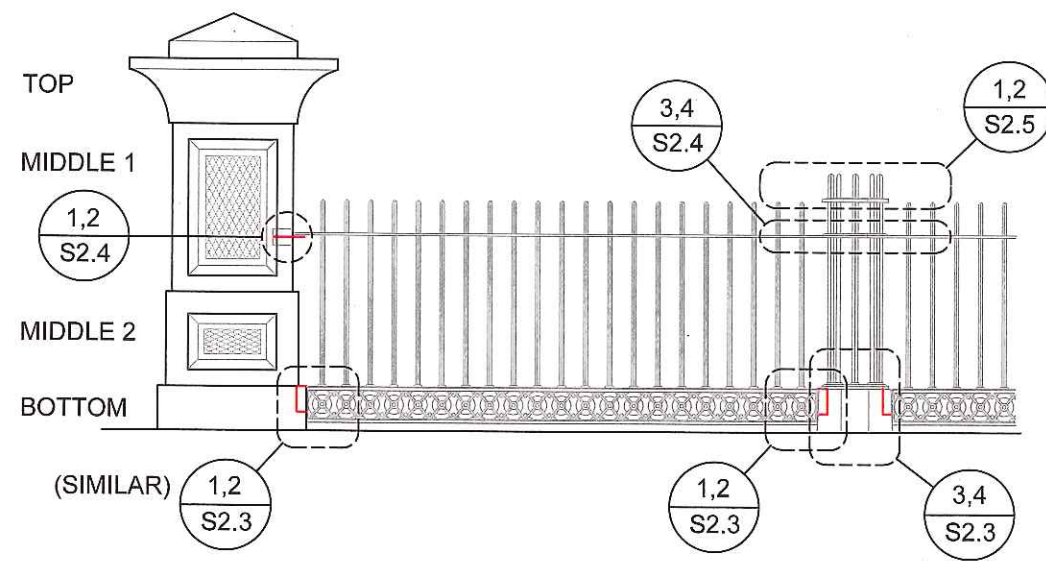

2  
S2.1

ELEVATION OF TYPICAL FENCE SECTION AT GRANITE PIER AND POST  
1/2" = 1'-0" (ON 22 X 34 SHEET)

- GENERAL NOTES - GRANITE ENTRY PIERS
1. LIFT, SHIM AND REPOSITION ENTIRE PIER ASSEMBLY TO SQUARE AND PLUMB.
  2. FLASH JOINTS BETWEEN GRANITE BLOCKS WITH 2" WIDE, 20 OZ. LEAD.
  3. ASSUME PAINT REMOVAL AT 20% OF GRANITE SURFACE AREA AT MIDDLE 1, MIDDLE 2 AND LOWER BLOCKS.
  4. ASSUME RUST REMOVAL AT 10% OF GRANITE SURFACE AREA AT MIDDLE 1, MIDDLE 2 AND LOWER BLOCKS.
  5. GRIND OUT FERROUS MATERIAL AT DETERIORATED ANCHORS. SEE DETAILS 1 & 2 SHEET S-2.4.
  6. SEE SHEETS S-3.1 THROUGH S-3.4 FOR INDIVIDUAL PIER TREATMENT SCHEDULES.

NOT FOR CONSTRUCTION

RESURGENCE  
ENGINEERING & PRESERVATION, INC  
132 BRENTWOOD STREET  
PORTLAND, ME 04103  
207.773.4860

LINCOLN PARK IRON FENCE RESTORATION  
ENTRY GATE AND TYPICAL FENCE ELEVATION

Project # 17-019  
Date: 1/29/18  
Issued for:  
HP REVIEW

NO.	DATE	REVISIONS
△	MM-DD-YY	
△	MM-DD-YY	

SHEET  
S-2.1