

GENERAL NOTES


- 1: DRAWING NOTES:**
CONTRACTOR TO FURNISH AND INSTALL ALL NOTED LABOR AND MATERIALS UNLESS OTHERWISE NOTED.
- 2: CODE COMPLIANCE:**
ALL WORK SHALL CONFORM TO THE LATEST EDITION OF STATE, LOCAL, AND OTHER CODES WHICH APPLY TO THIS PROJECT OR HAVE JURISDICTION.
- 3: COORDINATION:**
IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL DISCIPLINES AND TRADES SO THAT ALL BUILDING SYSTEMS AND COMPONENTS CAN BE ASSEMBLED WITHOUT CONFLICTS. IN THE EVENT THAT THE CONSTRUCTION DOCUMENTS DEFINE CONDITIONS WHICH PROHIBIT, OR MAY PROHIBIT, SUCH ASSEMBLY, THE CONTRACTOR SHALL BRING TO THE ARCHITECTS ATTENTION, IN WRITING AND IN A TIMELY FASHION, SUCH CONDITION. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION CLARIFICATION FROM THE ARCHITECT. THE CONTRACTOR AND HIS/HER SUBCONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING MATERIALS AND SYSTEMS SHOWN IN THE CONSTRUCTION DOCUMENTS REGARDLESS OF WHERE THE INFORMATION IS LOCATED. WHERE COMPONENTS OF A SYSTEM ARE INDICATED THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL LABOR AND MATERIALS NECESSARY TO COMPLETE THE SYSTEM.
- 4: DISCREPANCIES & CLARIFICATIONS:**
THIS PROJECT INVOLVES THE FIT-UP OF AN EXISTING BUILDING. EXISTING DIMENSIONS SHOWN ON THE DRAWINGS ARE BELIEVED TO BE ACCURATE, BUT CANNOT BE GUARANTEED, MEASURE AND VERIFY DIMENSIONS IN FIELD PRIOR TO FABRICATION AND CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO BRING TO THE ARCHITECTS ATTENTION, IN WRITING, ANY DISCREPANCIES OR AMBIGUITIES IN THE DRAWINGS AND/OR SPECIFICATIONS. THE CONTRACTOR SHALL NOT PROCEED WITH RELATED WORK WITHOUT A WRITTEN RESOLUTION OR CLARIFICATION FROM THE ARCHITECT.
- 5: LAYOUT:**
UNLESS INDICATED OTHERWISE, CENTER WALL FRAMING AND PARTITION FRAMING ON COLUMN LINES. FLOOR PLAN DIMENSIONS ARE TO CENTER OF FRAMING, FACE OF CONCRETE, FACE OF CMU, OR FROM COLUMN CENTERLINES, UNLESS INDICATED OTHERWISE. DOORS AND WINDOWS ARE DIMENSIONED TO CENTERLINES UNLESS INDICATED OTHERWISE.
- 6: CENTERING:**
UNLESS INDICATED OTHERWISE, CENTER BUILDING ELEMENTS WITHIN OR BETWEEN OTHER BUILDING ELEMENTS WHEN CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SUCH IS THE INTENT, WHETHER OR NOT DIMENSIONS ARE INCLUDED.
- 7: SYMMETRY:**
WHERE CONDITIONS OR THE DRAWINGS INDICATE OR IMPLY THAT SYMMETRY IS INTENDED, INFORMATION PROVIDED AT ONE SIDE APPLIES EQUALLY TO BOTH SIDES, UNLESS CONDITIONS CLEARLY PRECLUDE SUCH APPLICATION.
- 8: ACCESSIBILITY:**
ALL HANDICAPPED ACCESSIBLE BATHROOMS, GRAB BARS, AND DOOR OPENINGS SHALL MEET THE REQUIREMENTS OF TITLE 94-348, CHAPTER 5 OF THE MAINE HUMAN RIGHTS COMMISSION TITLE LATEST EDITION & THE DEPARTMENT OF JUSTICE ADA STANDARDS FOR ACCESSIBLE DESIGN.
- 9: DRAWING SCALES:**
WORK FROM THE GIVEN DIMENSIONS ONLY. SCALE IS INDICATED ON THE DRAWINGS FOR CONVENIENCE ONLY. IT IS NOT INTENDED THAT INFORMATION BE DETERMINED BY SCALING THE DRAWINGS SINCE SOME ITEMS MAY NOT BE TO SCALE.
- 10: WATER-RESISTANT GWB:**
INSTALL WATER-RESISTANT GYPSUM WALL BOARD IN ALL REST ROOMS & TOILET ROOMS OR AT ANY WALL WITH PLUMBING FIXTURES.
- 10A: HIGH IMPACT GWB:**
INSTALL HIGH IMPACT GYPSUM WALL BOARD IN ALL STAIRWELLS
- 11: INTERIOR ELEVATIONS:**
INTERIOR ELEVATIONS MAY BE REVERSED FROM AND/OR SIMILAR TO ACTUAL CONDITIONS. SEE FLOOR PLANS FOR WINDOW AND DOOR QUANTITIES AND LOCATIONS, FOR CASEWORK LAYOUTS, AND FOR MONITOR LOCATIONS.
- 12: BUILDING INSULATION:**
PROVIDE AS INDICATED IN WALL SECTIONS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND OTHER DRAWINGS. FOR CLARITY, INSULATION MAY NOT BE SHOWN IN SOME CASES, EVEN IF IT IS TO BE PROVIDED.
- 13: BLOCKING:**
INSTALL BLOCKING BEHIND ALL SURFACE-APPLIED FIXTURES TRIM, CASEWORK, SHELVES, BRACKETS, TOILET ACCESSORIES, CHAIR RAILS, PICTURE RAILS, GRAB BARS, BASE MOLDINGS, AND AS OTHERWISE REQUIRED, WHEN SUCH ITEMS ARE APPLIED ON STUD WALLS.
- 14: PENETRATIONS AT STRUCTURAL MEMBERS:**
BEFORE PENETRATING JOISTS, BEAMS OR OTHER STRUCTURAL MEMBERS, CONSULT WITH THE ARCHITECT.
- 15: DAMAGED WORK:**
BUILDING OR SITE COMPONENTS WHICH ARE AFFECTED BY NEW WORK, DEMOLITION, OR WHICH MAY BE DAMAGED BY THE GENERAL CONTRACTOR OR ANY SUB-CONTRACTOR SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR TO MEET THE APPROVAL OF THE ARCHITECT.
- 16: UTILITIES:**
VERIFY THE SIZE AND LOCATION OF ALL UNDERGROUND UTILITIES AND REPORT ANY DISCREPANCIES TO THE ARCHITECT IN WRITING. DO NOT PROCEED WITH WORK UNTIL THE DISCREPANCY HAS BEEN RESOLVED TO THE SATISFACTION OF THE ARCHITECT.
- 17: RATED CONSTRUCTION:**
PROVIDE RATED CONSTRUCTION AS REQUIRED BY CODE, AS SPECIFIED, AND AS INDICATED ON DRAWINGS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE AND INSTALL ALL COMPONENTS REQUIRED TO CREATE SUCH RATED CONSTRUCTION, REGARDLESS OF WHETHER OR NOT SUCH COMPONENTS ARE INDICATED. PROVIDE CONTINUITY OF SUCH RATED CONSTRUCTION AROUND AND BETWEEN SPACES, INCLUDING AT CHASES AND AT FLOORS, TO MAINTAIN COMPLETE SEPARATIONS, EVEN IF NOT SPECIFICALLY INDICATED.
- 18: SHOP DRAWINGS:**
SUBMIT SHOP DRAWINGS TO THE ARCHITECT FOR REVIEW PRIOR TO FABRICATIONS. SUBMITTALS REQUIRED INCLUDE, BUT ARE NOT LIMITED TO, SHOP DRAWINGS FOR ALL PREFABRICATED CONCRETE, STEEL, MILLWORK & SIGNAGE, SAMPLES OF ALL PROPOSED PAINTS, METALS, WALL COVERINGS, LAMINATES, SOLID SURFACE MATERIALS, CERAMIC TILE, AND HARDWARE, SUBMIT MANUFACTURERS' DATA FOR ALL LIGHTING SYSTEMS, AND HARDWARE.
- 19: PERMITS:**
THE GENERAL CONTRACTOR SHALL OBTAIN AND PAY FOR ANY BUILDING PERMITS REQUIRED AND CARRY ANY INSURANCE COVERAGES REQUIRED.
- 20: INTERIOR FINISHES:**
ALL INTERIOR FINISHES AND FURNISHINGS ARE TO BE CLASS 'A' FIRE-RATED AND ARE TO COMPLY WITH SECTION 920.0 BOCA (INTERIOR FLAME SPREAD).
- 21: ELECTRICAL DESIGN:**
DESIGN BUILD FORMAT
- 22: WASTE REMOVAL:**
THE GENERAL CONTRACTOR SHALL DISPOSE OF ALL WASTE AND DEBRIS OFF THE PREMISES.
- 23: LANDLORD COORDINATION:**
THE GENERAL CONTRACTOR MUST COORDINATE WITH THE BUILDING OWNER ALL ACTIVITIES INCLUDING BUT NOT LIMITED TO WORK WHICH WILL GENERATE EXCESSIVE NOISE AND MODIFICATION TO UTILITIES. WORK MUST NOT INTERFERE WITH EXISTING SMOKE DETECTORS, ALARMS OR BUILDING SYSTEM MANAGEMENT.
- 24: TEMPORARY FACILITIES:**
PROVIDE ALL TEMPORARY FACILITIES AND SERVICES, CONSTRUCTION AND SUPPORT FACILITIES, AND SECURITY AND PROTECTION AS NEEDED TO PROTECT NEW AND EXISTING CONSTRUCTION FOR THE DURATION OF A COMPLETE INSTALLATION.
- 25: FINAL CLEANING:**
EMPLOY EXPERIENCED WORKERS FOR FINAL CLEANING. CLEAN EACH SURFACE TO THE CONDITION EXPECTED IN A COMMERCIAL BUILDING CLEANING PROGRAM.
- 26: MANUFACTURERS INSTRUCTIONS:**
ALL MATERIALS & EQUIPMENT SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
- 27: GUARANTEE:**
GUARANTEE: ALL MATERIALS AND WORKMANSHIP SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE UNLESS OTHERWISE SPECIFIED FOR A LONGER PERIOD OF TIME ON A CERTAIN ITEM.
- 28: ASBESTOS:**
ALL MATERIAL USED FOR THE CONSTRUCTION OF THIS PROJECT, WHETHER INCLUDING MATERIALS OR APPURTENANCES, SHALL BE NON-ASBESTOS CONTAINING MATERIAL.
- 29: HAZARDOUS FUMES:**
THE GENERAL CONTRACTOR SHALL CONFIRM THAT ALL MATERIAL AND FINISHES SPECIFIED AND THEIR FABRICATION OR INSTALLATION WILL NOT RELEASE FUMES OR AROMAS DURING CONSTRUCTION WHICH MAY BE A HAZARD OR NUISANCE TO PERSONNEL.
- 30: PEST CONTROL:**
SEAL AND CAULK AROUND ALL PENETRATIONS, CRACKS AND CREVICES AND ANY OPENINGS CAPABLE OF HARBORING INSECTS/RODENTS.
- 31. EXPOSED UTILITIES:**
ALL EXPOSED UTILITY WIRES AND PIPES (ELECTRICAL, PLUMBING, ETC.) SHALL BE INSTALLED IN A WAY THAT DOES NOT OBSTRUCT OR PREVENT THE CLEANING OF FLOORS, WALLS, AND CEILING AREAS. THEY SHALL BE INSTALLED A MINIMUM OF 6" OFF FLOORS AND 1" OFF WALLS, CEILINGS AND ADJACENT PIPES.
- 32. OWNER SUPPLIED EQUIPMENT:**
EQUIPMENT SUPPLIED BY THE OWNER AND INSTALLED BY THE GENERAL CONTRACTOR. EQUIPMENT INFORMATION AND SPECIFICATIONS ARE TO BE THE MOST CURRENT AVAILABLE AT THE TIME OF DOCUMENTATION PREPARATION. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING WITH THE OWNER THE EXACT DIMENSIONS AND EQUIPMENT CONNECTION REQUIREMENTS (INCLUDING ELECTRICAL CIRCUIT REQUIREMENTS) OF EQUIPMENT TO BE SUPPLIED. THE GENERAL CONTRACTOR SHALL MAKE ALL FINAL CONNECTIONS AS NOTED ON THE DRAWINGS. INSTALL THE SET UP IN WORKING ORDER, CHECK WARRANTIES, TEST AND NOT VOID WARRANTIES. THE GENERAL CONTRACTOR SHALL COORDINATE WITH THE OWNER DELIVERY, STORAGE AND INSTALLATION OF ALL OWNER SUPPLIED EQUIPMENT. THE GENERAL CONTRACTOR SHALL STORE EQUIPMENT IF REQUESTED BY THE OWNER UNTIL INSTALLATION. SEE DRAWINGS FOR OTHER OWNER SUPPLIED/GENERAL CONTRACTOR INSTALLED ITEMS.
- 33: FIRE PROTECTION NOTE:**
EXISTING SPRINKLERHEADS, ALARM SYSTEM AND DETECTORS ARE TO BE MODIFIED TO CONFORM WITH THE PROPOSED PLAN. COORDINATE WITH THE ARCHITECT. ANY MODIFICATION OR LOCATIONS WHERE EXISTING SYSTEMS ARE AFFECTED BY THE NEW DESIGN.
- 34: SOILS AT FOOTINGS:**
REPORT THE LOCATION OF ALL UNSUITABLE SOILS AND MATERIALS BELOW ANTICIPATED LEVEL OF FOOTING TO THE ARCHITECT PRIOR TO THE SETTING OF FORMS.
- 35: ACCESS PANELS:**
CONTRACTOR IS RESPONSIBLE FOR COORDINATING QUANTITY AND LOCATION OF ALL REQUIRED ACCESS PANELS FOR ALL MEP CONTROLS, CLEANOUTS, DAMPERS, PULL BOXES, ETC.
- 36: EXISTING HAZARDOUS MATERIALS**
ALL HAZARDOUS MATERIALS INCLUDING BUT NOT LIMITED TO ASBESTOS AND LEAD PAINT ARE TO BE HANDLED, ENCAPSULATED, ABATED AND DISPOSED OF IN ACCORDANCE WITH ANY AND ALL FEDERAL, STATE AND LOCAL REQUIREMENTS AND REGULATIONS.
- 37. INDUSTRY STANDARDS:**
ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH INDUSTRY STANDARDS. STANDARDS INCLUDE BUT ARE NOT LIMITED TO THE FOLLOWING:

- AAMA AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION
 ACI AMERICAN CONCRETE INSTITUTE
 ANSI AMERICAN NATIONAL STANDARDS INSTITUTE
 ASTM AMERICAN SOCIETY FOR TESTS AND MATERIALS
 AWI ARCHITECTURAL WOODWORK INSTITUTE
 "CUSTOM GRADE"
 AWS AMERICAN WELDING SOCIETY
 IGMA INSULATING GLASS MANUFACTURERS ALLIANCE
 NAIMM NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS
 NRCA NATIONAL ROOFING CONTRACTORS ASSOCIATION
 NTCA NATIONAL TILE CONTRACTORS ASSOCIATION
 SMACNA SHEET METAL AND AIR CONDITIONING NATIONAL ASSOCIATION
 WDMA WINDOW AND DOOR MANUFACTURERS ASSOCIATION

ABBREVIATIONS

- | | | | | | |
|---|----------|--|---|---------|--|
| A | AC | AIR CONDITIONING | L | LAB | LABORATORY |
| | ACT | ACTUATED | | LAM | LAMINATED |
| | AD | AREA DRAIN | | LE | LEAD |
| | ADAAG | AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES | | LH | LEFT-HAND LEAD COATED COPPER |
| | ADD | ADDENDUM | M | M | MACHINERY |
| | AFF | ABOVE FINISHED FLOOR | | MAS | MASONRY |
| | AHU | AIR-HANDLING UNIT | | MATL | MATERIAL |
| | AL | ALUMINUM | | MAX | MAXIMUM |
| | ARCH | ARCHITECTURAL | | MD | MEDIUM DENSITY OVERLAY |
| | AWP | ACOUSTIC WALL PANEL | | MECH | MECHANICAL |
| B | B TO BLS | BACK-TO-BACK ANGLES | | MEMB | MEMBRANE |
| | B.B.G.C. | BASE BUILDING GENERAL CONTRACTOR | | MFR | MANUFACTURER |
| | B | BUILDING LINE | | MEZZ | MEZZANINE |
| | BLDG | BUILDING | | MZ | MASONRY |
| | BLKS | BLOCKING | | MIN | MINIMUM |
| | BSMT | BASEMENT | | MISC | MISCELLANEOUS |
| | BTVN | BETWEEN | | MO | MASONRY OPENING |
| | BO | BY OTHERS | | MTD | MOUNTED |
| | | | | MTL | METAL |
| | | | | MB | MARKER BOARD |
| C | C | COURSE (MASONRY) | N | N | NORTH |
| | CER | CERAMIC | | NUM | NUMBER |
| | CG | CORNER GUARD | | NIC | NOT IN CONTACT |
| | CH | COAT HOOK | | NOM | NOMINAL DIMENSION |
| | CJ | CONTROL JOINT | | NTS | NOT TO SCALE |
| | CL | CENTER LINE | O | O | OVERLAP |
| | CLG | CEILING | | OC | ON CENTER |
| | CMU | CONCRETE MASONRY UNIT | | OD | OUTSIDE DIAMETER/OUTSIDE DIMENSION |
| | CO | CLEAN OUT | | OF | OFF |
| | COL | COLUMN | | OPNG | OPENING |
| | CONC | CONCRETE | | OPP | OPPOSITE |
| | COND | CONDITION | | OPH | OPPOSITE HAND |
| | CONN | CONNECTION | | OSB | ORIENTED STRAND BOARD |
| | CONST | CONSTRUCTION | | OZ | OUNCE |
| | CONT | CONTINUOUS | F | PBOIBC | PURCHASED BY OWNER INSTALLED BY CONTRACTOR |
| | CORR | CORRIDOR | | PC | PRECAST |
| | CUH | CERAMIC TILE CABINET UNIT HEATER | | PL | PLATE |
| D | DBL | DOUBLE | | PLM | PLASTIC LAMINATE |
| | DIA | DIAMETER | | PR | PAIR |
| | DIFF | DIFFUSER | | PRE FAB | PREFABRICATED |
| | DIM | DIMENSION | | PRIVAC | PRIVACY |
| | DN | DOWN | | PRIM | PRIMED |
| | DR | DOOR | | PSF | POUNDS PER SQUARE FOOT |
| | DSP | DRY STAND PIPE DRAWING | | PSI | POUNDS PER SQUARE INCH |
| | DWG | DRAWING | | PTD | PAINTED |
| E | E | EAST | | PTD | PAINTED |
| | EA | EACH | | PTD | PAINTED |
| | ELEV | ELEVATION | | PVC | POLYVINYL CHLORIDE |
| | ELEC | ELECTRICAL | | PWD | PLYWOOD |
| | ELEV | ELEVATION | | PT | PERFORATED |
| | ENTR | ENTRANCE | | PT | PERFORATED |
| | EQ | EQUIPMENT | Q | Q | QUARRY TILE |
| | EQUIP | EQUIPMENT | | QTR | QUARTER |
| | EXP | EXPANSION | R | R | RISER/RADIUS |
| | EXPJ | EXPANSION JOINT | | RAD | RADIUS |
| | EXT | EXTERIOR | | RUB | RUBBER BASE |
| | EPM | ETHYLENE PROPYLENE DIENE MONOMER | | RCP | REFLECTED CEILING PLAN |
| | EW | ELECTRIC WATER COOLER | | RD | REFLECTED CEILING PLAN |
| F | F | FAHRENHEIT | | REBAR | REINFORCING BAR |
| | FB | FLAT BAR | | REFIN | REFINISHED |
| | FC | FIRE EXTINGUISHER AND CABINET | | REQ | REQUIRED |
| | FD | FLOOR DRAIN | | RES | RESILIENT |
| | FE | FIRE EXTINGUISHER | | REV | REVERSE |
| | FEC | FIRE EXTINGUISHER CABINET | | RM | ROOM |
| | FTWD | FIRE TREATED WOOD FINISH | | RO | ROUGH OPENING |
| | FIN | FLOOR | | ROW | RIGHT OF WAY |
| | FOB | FACE OF BRICK | S | S | SOUTH |
| | FOC | FACE OF CONCRETE | | SCHED | SCHEDULE |
| | FOF | FACE OF FINISH | | SIM | SQUARE FEET |
| | FOS | FACE OF STUDS | | SIM | SIMILAR |
| | FW | FACE OF WALL | | SPEC | SPECIFICATION |
| | FSS | FIRE SUPPRESSION SYSTEM | | SO | SQUARE |
| | FOOT | FOOTING | | SST | STAINLESS STEEL |
| | FTG | FOOTING | | STD | STANDARD |
| | FRG | FIBER REINFORCED GYPSUM | | STL | STEEL |
| | FTR | FIBER TUBE RADIATION | | STR | STRUCTURE |
| | FH | FUME HOOD | | SUSP | SUSPENSION |
| G | GA | GALVE | T | T&G | TONGUE&GROOVE |
| | GALV | GALVANIZED | | TEL | TELEPHONE |
| | GB | GRAB BAR | | THK | THICK |
| | GC | GENERAL CONTRACTOR | | THK | THICK |
| | GFI | GROUND-Fault INTERRUPTER | | TOD | TOP OF DECK |
| | GL | GLASS | | TOS | TOP OF STEEL |
| | GLAM | GLUE-LAMINATED WOOD | | TP | TYPICAL |
| | GWB | GYPSUM WALL BOARD | | TV | TELEVISION |
| H | HB | HOSE BIB | | TE | TACK BOARD |
| | HIC | HARDWARE | | TOP | TOP OF CONCRETE |
| | HM | HOLLOW METAL | U | U | UNDERWRITERS LABORATORIES, INC. |
| | HORIZ | HORIZONTAL | | UL | UNIT VENTILATOR |
| | HP | HORSE POWER/HIGH POINTHEAT PUMP | | VCT | VINYL COMPOSITION TILE |
| | HR | HOUR | | VERT | VERTICAL |
| | HW | HOT WATER HEATING VENTILATION AIR CONDITIONING | | VIE | VERIFY IN FIELD |
| | HVAC | HOT WATER HEATING VENTILATION AIR CONDITIONING | | VOL | VOLUME |
| I | I | INSIDE DIMENSION/INSIDE DIAMETER | W | W | WEST |
| | ID | INCH | | WO | WITHOUT |
| | IN | INFORMATION | | W | WOOD |
| | INFO | INFORMATION | | WD | WIDE FLANGE |
| | INSUL | INSULATION | | WP | WORK POINT |
| J | JST | JOIST JOINT | | WT | WEIGHT |
| | JT | JOIST JOINT | | | |
| K | KD | KILN-DRIED | | | |
| | KIP | 1000 POUNDS | | | |

FIRESTOPPING DETAILS

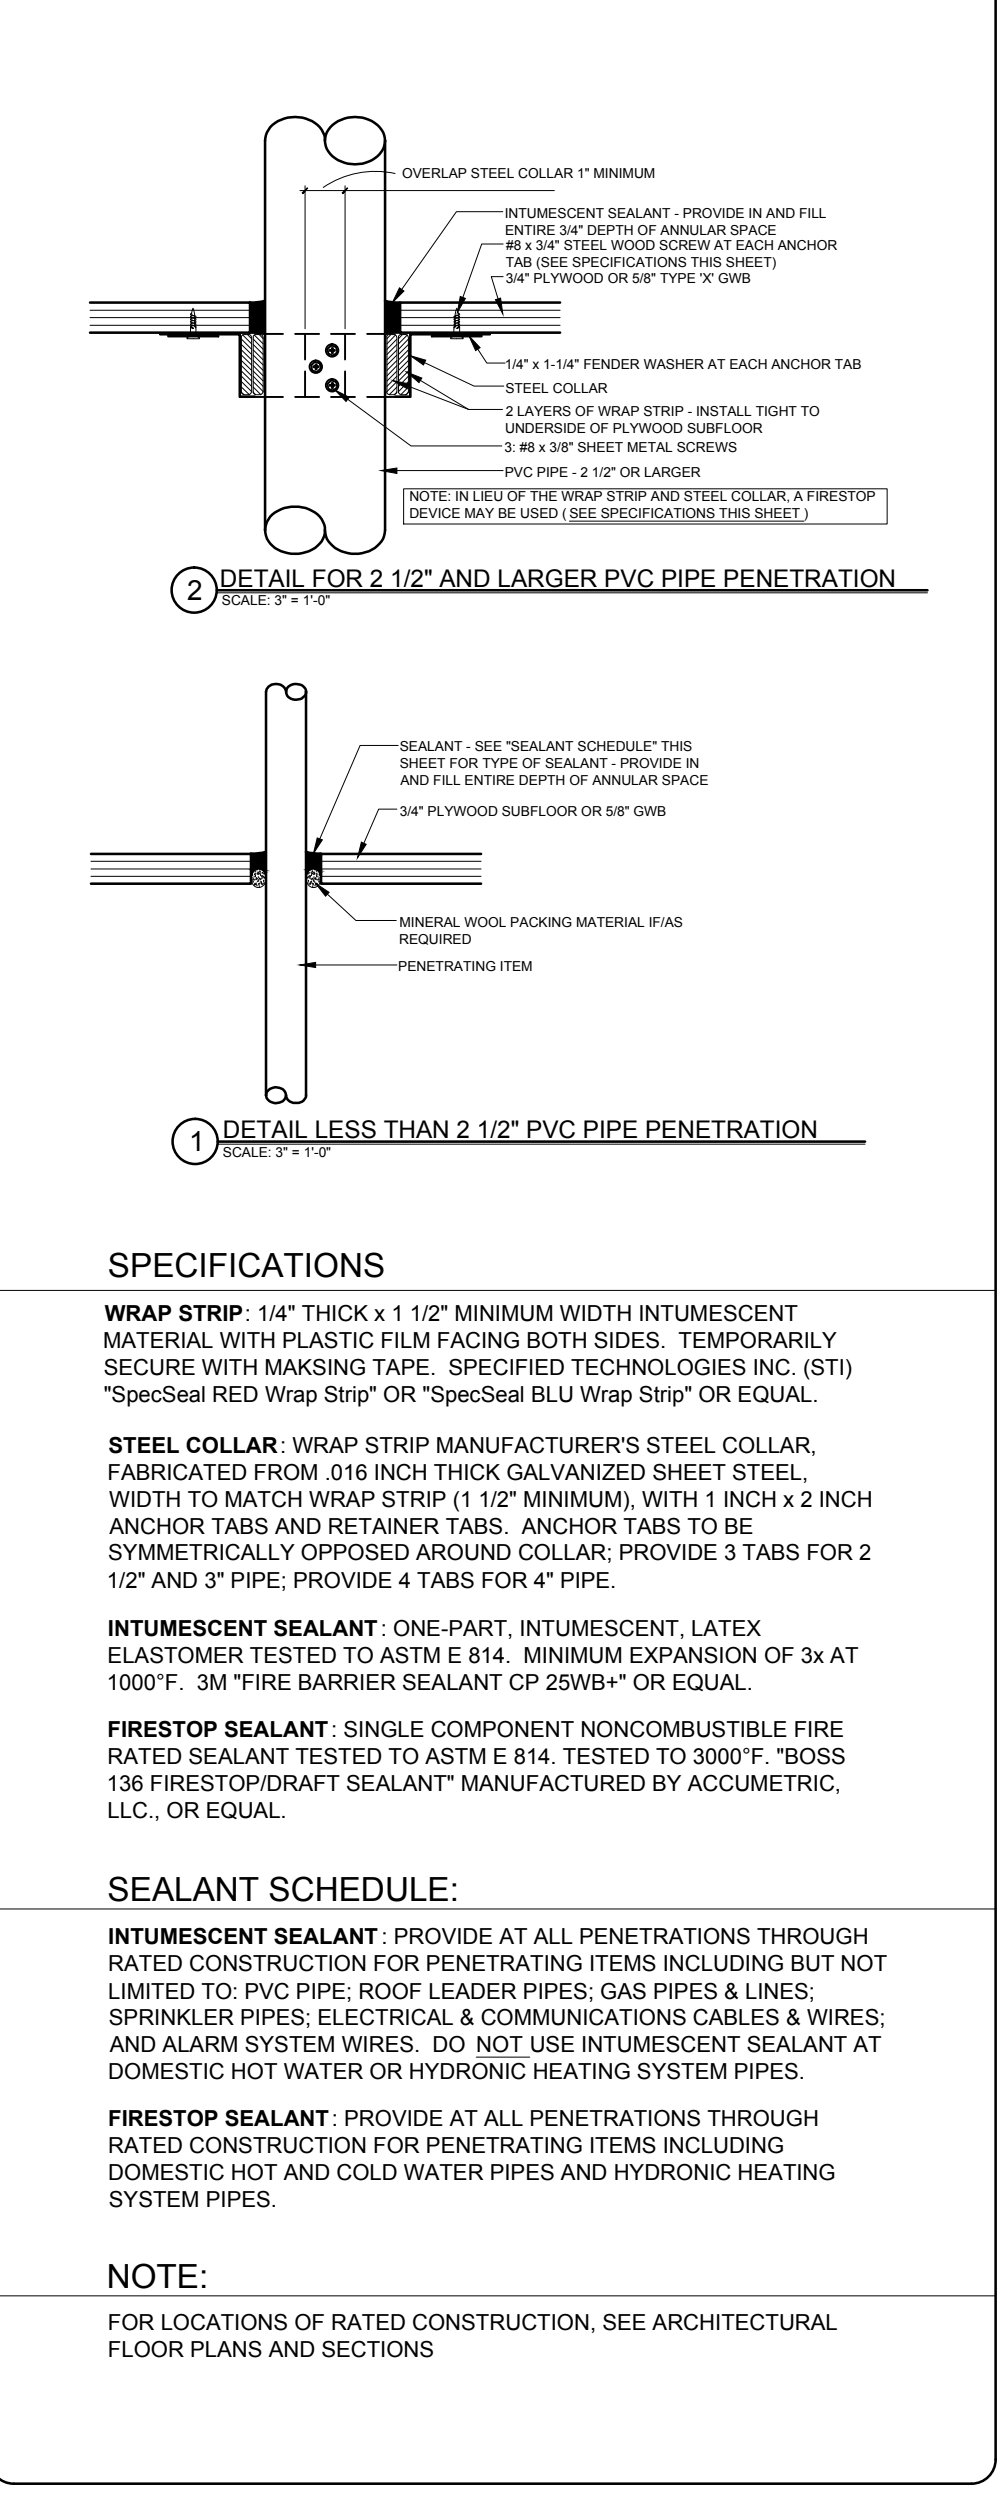

WALL TYPES



- GENERAL PARTITION NOTES:
- 1.) AT ALL FIRE WALLS, GENERAL CONTRACTOR TO CONFIRM THAT ALL WALLS ARE TIGHT TO ROOF AND OR FLOOR DECK ABOVE, PROVIDE HEAD DEFLECTION SLIP TRACKS AT NON BEARING METAL STUD FRAMED WALLS. G.C. TO EXTEND EXISTING WALLS CONVERTED TO FIRE WALLS UP TIGHT TO DECK ABOVE SHOULD THE EXISTING CONDITION REQUIRE.
 - 2.) G.C. TO PROVIDE FIRE CAULKING, FIRE STOPPING, AND BLOCKING AS REQUIRED AT ALL TOP OF WALLS AT CORRUGATED DECK FLUTES, TRUSS VOIDS, AND ALL GENERAL VOIDS.
 - 4.) INSTALL WATER-RESISTANT GYPSUM WALL BOARD IN ALL RESTROOMS AND TOILET ROOMS WALLS AND CEILINGS, AND AT ANY WALL WITH PLUMBING FIXTURES.
 - 5.) ALL PARTITION TYPES WITH AN INSULATION COMPONENT TO BE ACOUSTICALLY SEALED.
 - 6.) COORDINATE FINISHES WITH ROOM FINISH SCHEDULE.
 - 7.) PENETRATIONS THROUGH RATED WALLS AND CEILING ASSEMBLIES SHALL HAVE SEALANTS CONFORMING TO RATING REQUIREMENTS.
 - 8.) CONTRACTOR TO VERIFY WALL LOCATIONS IN FIELD AND COORDINATE WITH EXISTING PIPE LOCATIONS, NOTIFY ARCHITECT OF ANY DISCREPANCIES.
 - 10.) HOLD BOTTOM EDGE OF GWB UP FROM CONCRETE TYPICAL
 - 11.) PROVIDE MID SPAN METAL BLOCKING AT ALL WALLS OVER 9' TALL
 - 12.) PROVIDE SOLID BLOCKING IN WALLS AND PARTITIONS FOR ALL WALL MOUNTED ITEMS (GRAB BARS, CABINETS, COUNTERS, SHELVES, ETC.)

TYPE	STC RATING	UL / GA RATING	DESCRIPTION	NOTES
1	N/A	N/A	- 5/8" GWB - 3/8" MTL STUDS @ 16" O.C. - 3 1/2" BATT INSULATION - 5/8" GWB	- WALL TO EXTEND TO 6" ABOVE FINISHED CEILING HEIGHT - BRACE WALL WITH DIAGONAL BRACES TO STRUCTURE ABOVE - MATCH ADJACENT WALL THICKNESS AT INFILL WALLS
2	N/A	N/A	- 5/8" GWB - 3/8" MTL STUDS @ 16" O.C. - 3 1/2" BATT INSULATION - 5/8" GWB	- WALL TO EXTEND TO ROOF OR FLOOR DECK ABOVE WITH DEFLECTION HEAD TRACK, PROVIDE ACOUSTICAL SEALANT AT ALL INTERSECTIONS - MATCH ADJACENT WALL THICKNESS AT INFILL WALLS
3	50	N/A	- (2) LAYERS OF 5/8" GWB - 3/8" MTL STUDS @ 16" O.C. - 3 1/2" BATT INSULATION - (2) LAYERS OF 5/8" GWB	- WALL TO EXTEND TO ROOF OR FLOOR DECK ABOVE WITH DEFLECTION HEAD TRACK, PROVIDE ACOUSTICAL SEALANT AT ALL INTERSECTIONS - MATCH ADJACENT WALL THICKNESS AT INFILL WALLS

CEILING TYPES

TYPE	UL / GA RATING	DESCRIPTION
1		- EXISTING ROOF / FLOOR FRAMING - IF BATT INSULATION IS FOUND ABOVE EXISTING CEILING REINSTALL ON TOP OF NEW CEILING - ACOUSTICAL CEILING HANGER SYSTEM AND TRACKS, HUNG FROM JOISTS ABOVE - ACOUSTICAL CEILING TILE
2		- EXISTING ROOF / FLOOR FRAMING - IF BATT INSULATION IS FOUND ABOVE EXISTING CEILING REINSTALL ON TOP OF NEW CEILING - EXISTING CEILING HANGER SYSTEM AND TRACKS, HUNG FROM JOISTS ABOVE (REPLACE GRD AS REQUIRED) - 5/8" MOISTURE RESISTANT GYPSUM WALLBOARD WITH PLASTER TOPCOAT AND LATEX ENAMEL PAINT

DRAWING LEGEND

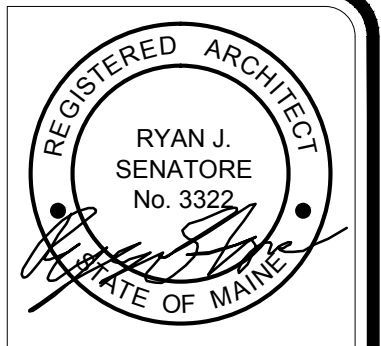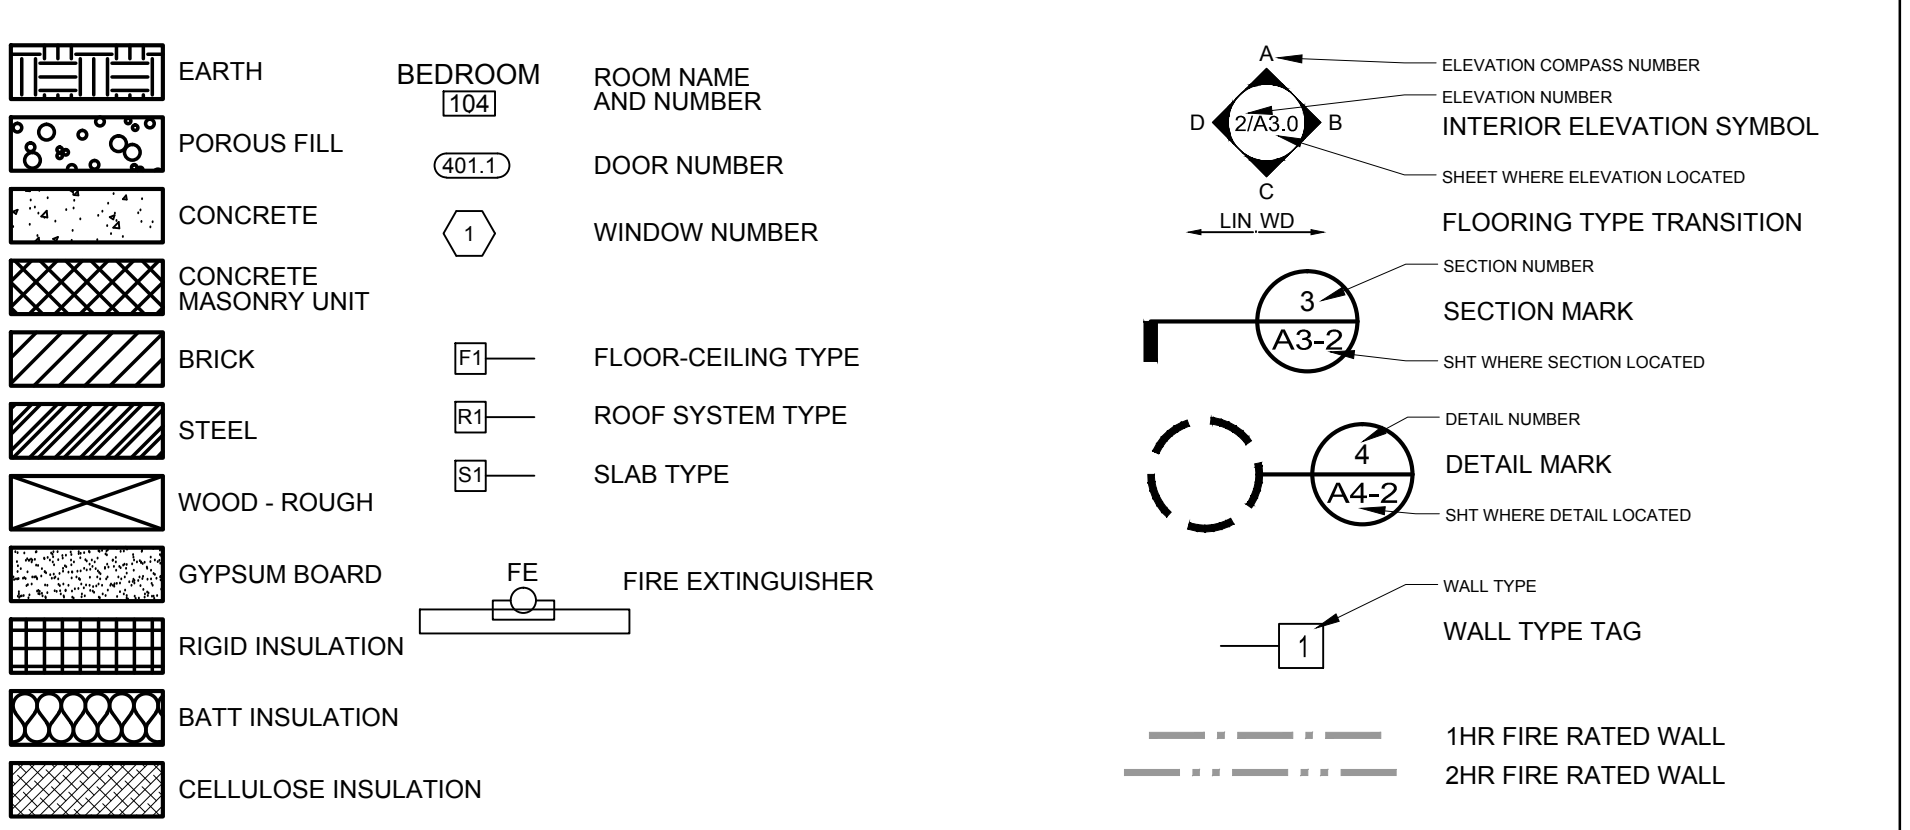

© 2014 RYAN SENATORE ARCHITECTURE

MEPS
510 CONGRESS STREET
PORTLAND, MAINE



CONSULTANTS:

REVISIONS:

DATE:	OCTOBER 30, 2014
PROJECT No.	
DRAWN BY:	RRT / RJS
CHECKED BY:	RJS
SCALE:	AS NOTED
SHEET TITLE:	GENERAL NOTES ABBREVIATIONS LEGEND WALL TYPES CEILING TYPES

G1-0