City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:		Phone:	Permit No: 9 81329
Owner Address:	Rotel Everett Lessee/Buyer's Name:		773-7882 BusinessName:	DEDMIT ICCLIED
P.O. Box 4211 Pt1d, ME 04101	Lessee/Buyer's Name.	rnone.	businessivame.	PERMIT ISSUED
Contractor Name:	Address:	Phone:		Permit Issued:
Maine Bay Canvas		HE HE		NOV 2 5 1998
Past Use:	Proposed Use:	COST OF WORK:	PERMIT FEE:	
Botel	Same	+	\$	CITY OF PORTLAND
		FIRE DEPT. Ap		
			BOC & 96 100	Zone: CBL: 037-H-014
		Signature:	Signature: Toffen	
Proposed Project Description:			TIVITIES DISTRICT (P. A.)	Zoning Approval:
Including and Annual Annual			proved	Special Zone of Reviews:
Install canopy over front entra	nce of old Hotel Everett		proved with Conditions:	
Remaming Oak Leaf Inn				
		Signature:	Date:	
Permit Taken By:	Date Applied For:	联系工具的复数形式 工具	1998 16 Oct 98	Site Plan maj 🗆 minor 🗆 mm 🗆
				Zoning Appeal
1. This permit application does not preclude the	Applicant(s) from meeting applicable Sta	ate and Federal rules.		
2. Building permits do not include plumbing, se	eptic or electrical work.			☐ Miscellaneous □ Conditional Use
3. Building permits are void if work is not starte	d within six (6) months of the date of issu	ance. False informa-		□ Interpretation
tion may invalidate a building permit and stop all work			Approved Denied	
				Denied
				Historic Preservation
			PERMIT ISSUED TH REQUIREMENTS	□ Not in District or Landmark □ Does Not Require Review
		WI	TH REQUIREMENTS	□ Requires Review
			CONCIMENTS	
				Action:
	CERTIFICATION			□ Appoved
I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition,				
authorized by the owner to make this application if a permit for work described in the application is				
areas covered by such permit at any reasonable h				Date:
and a second	n in the second s	(over the second base of the second s		
	Q5 8	ovember 1998		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	-
RESPONSIBLE PERSON IN CHARGE OF WOR	K. TITLE		PHONE:	
White-Pe	ermit Desk Green-Assessor's Cana	ary-D.P.W. Pink-Public	c File Ivory Card-Inspector	

1.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UN TIL PERMIT IS ISSUED Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building) :	51A Oak Street	Portland, ME
Total Square Footage of Proposed Structure 66'6"	Square Footage of Lot	
Tax Assessor's Chart, Block & Lot Number Chart# 037 Block# H Lot# 014	Owner: Hotel Everett	Corp 773-7882
Owner's Address: P.O. BOX 4211 Portland, ME 04101	Lessee/Buyer's Name (If Applicable)	Cost Of Work: Fee \$ 2205 $$ 35$
Proposed Project Description: (Please be as specific as possible) install (anopy over Event - renaming	front entrance Oak Leaf Inn	of old Hotel
	53 Industrial We	ay Portland Ree'd By
Current Use:	Proposed Use:	

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

•All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code.

•All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application:

1) ACopy of Your Deed or Purchase and Sale Agreement

2) A Copy of your Construction Contract, if available

3) A Plot Plan/Site Plan

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional. A complete set of construction drawings showing all of the following elements of construction:

Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)

- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas
 equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant:	willer	Kermill	Date: 10/10/98
D 111 D/	1	1 1 01000 1 00 00 01	000.00

Building Pérmit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter. Additional Site review and related fees are attached on a separate addendum

Nicholas KAMPF applicant & owner of Hotel

SIGNAGE PRE-APPLICATION

ADDRESS: Hole Everet Inc ZONE: B-3
OWNER: Hotel Everett Corp.
APPLICANT: Nicholas Kampf
ASSESSOR NO
PLEASE CIRCLE APPROPRIATE ANSWER
INGLE TENANT LOT ? YES NO MULTI-TENANT LOT? YES NO
REESTANDING SIGN? (ex. Pole Sign) YES NO DIMENSIONS HEIGHT
MORE THAN ONE SIGN? YES NO DIMENSIONS HEIGHT
IGN ATTACHED TO BLDG.? YES NO DIMENSIONS
MORE THAN ONE SIGN? YES NO DIMENSIONS
WNING: KES NO IS AWNING BACKLIT? YES NO HEIGHT OFF SIDEWALK 7'1" IS THERE ANY MESSAGE, TRADEMARK OR SYMBOL ON IT? Oak heaf
** TENANT BLDG. FRONTAGE (IN FEET): <u>310</u> *** <u>REQUIRED INFORMATION</u> <u>AREA FOR COMPUTATION</u>
YOU SHALL PROVIDE:
A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE
EXISTING AND NEW SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES
AND/OR PICTURES OF PROPOSED ARE ALSO REQUIRED.

SIGNATURE OF APPLICANT:	Authal Karrel	DATE: 10/9/98
	1	

207-878-511	9 MAINE BAY CANVAS		044 P01	SEP 12 '9	8 05.00
ESTIN	ATE - CONTRAC	F wo#			
SOLD TO:LO	la Kampf	and the second se			
DEL. ADDRESS	Oak St.		9/12/98		
	Portland, ME			wks from	order
MAIL ADDRESS	142 High St. Suite 532	HOME	HOME PHONE 879-0949		
	P.O. Box 4211	BUS. P	HONE		
-	Portland, ME 04101	FRAMI	STYLE We	lded/Entr	ance
		FABRI	C & COLOR	Sunbrell	La FR
		1		o be dete	

Manufacture and install welded entrance canopy over entrance at 51A Oak St. , Portland. The style is represented in the shop drawing enclosed.


Frame: 1" square galvanized steel tubing. Custom fabricated to design specs and brushed ground and painted.

Fabric: Sunbrella firesist woven acrylic. (in choice of color).

Dimensions: 13'-6" x 5'-0" tall x 5'-0" projection.

Graphics: OAKLEAF INN to appear 3 times. Once on the face and again on each end.

ITEM:	ESTIMATE	CONTRACT AGREEMENT
entrance canopy	\$2,095.00	Maine Bay Canvas, Inc. agrees to sell, deliver and install to the Buyer, and the Buyer agrees to purchase and accept from Maine Bay Canvas, Inc. the above described goods or
tax	\$110.00	property, subject to and upon the terms and conditions hereof expressed. Any alteration or deviation from specifications involving extra costs will become an additional charge over and above the quote.
		Until the said total balance is paid in full and all of the conditions hereof are fully per- formed title to and ownership of the property purchased under this contract shall be and remain the property of Maine Bay Canvas, Inc.
		No cancellations will be accepted after work has started, or on special order merchan- dise. Delivery dates shown are approximate unless otherwise stated.
		Estimates do not include applicable taxes.
ESTIMATETOTAL	\$2,205.00	I have House
LESS DEPOSIT	50%	
DUE UPON INSTALLATION	Net	Maine Bay Canvas

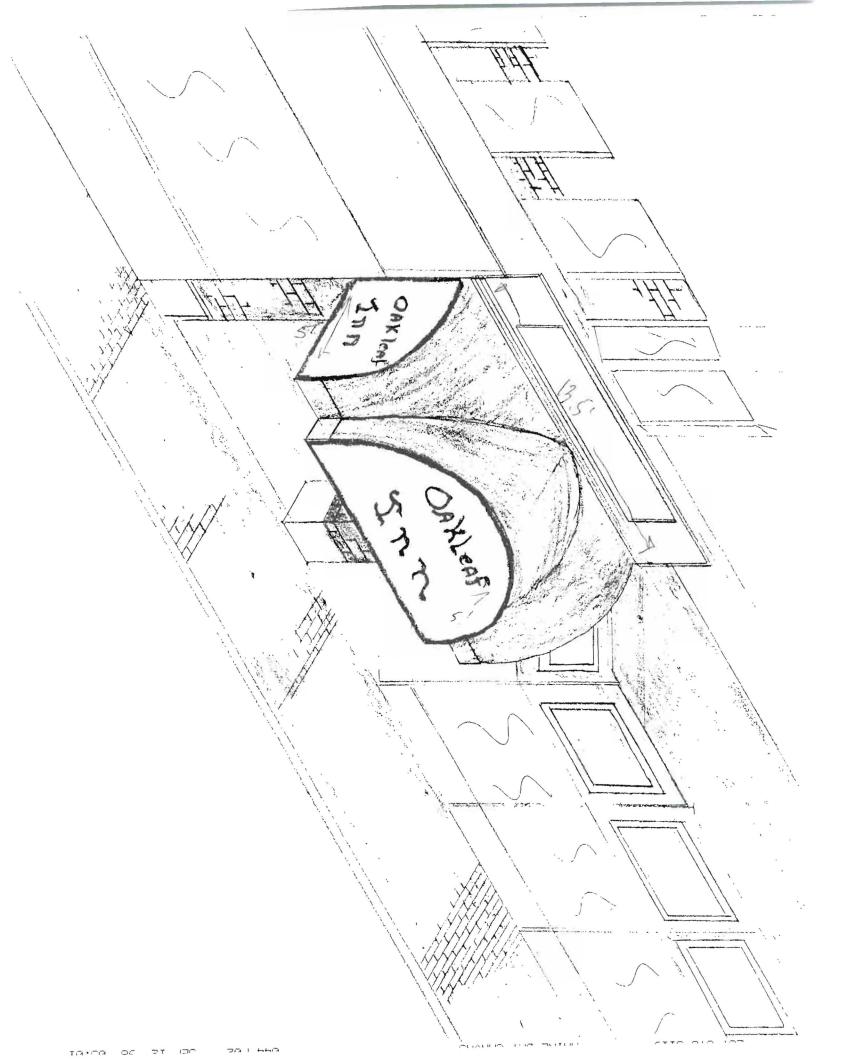

Lola 181-3921 Oak Lead Inn Canop 181-3921 51A Oak St (1	4 Hotel
Image: Constraint of the second state of the second sta	207-878-5119 MAINE BAY
FOR Mult The articles (or are inherently normalitinable). FOR Mult The articles the area of the state of	CANNAS
Trade name of flame-resistant fabric or material usedR Subbrella®Reg. NoFA-36801 The Flame Retardant Process Used will not Will not Be Removed By Washing Olda Vet 7 B Be ASSEMAND Glen Raven Mills, Inc. Name of Applicator or Production SuperIntendent By	130 P01 NOV 06 '98 09:32

 \vdash

			12/198 - Talked W/ "Lale" of the 96 - at 3105, and take
Type Foundation: Framing: Plumbing: Final: Other:			COMMENTS of Spland Stails of
Date			18acat

BUILDING PERMIT REPORT

DAT	E: 25 NOV. 98 ADDRESS: 51A OAK ST. CBL 037-H-014
REA	SONFORPERMIT: TO INSTALL CANOPY
BUIL	DINGOWNER: MoTel Everett Corp
	TRACTOR: MAINE Bay Canvas
PERI	MIT APPLICANT: OWNER
USE	GROUP R-/ BOCA 1996 CONSTRUCTION TYPE 3B
001	
	CONDITION(S) OF APPROVAL
This	Permit is being issued with the understanding that the following conditions are met:
	roved with the following conditions: $\times /$
Appr	
X 1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
2.5	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more
	than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside
	edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the
	floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with
	an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane
	material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6"
	of the same material. Section 1813.5.2
2.6	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of
2	foundation and a maximum 6 'o.c. between bolts. (Section 2305.17)
3. 4.	Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to
7.	verify that the proper setbacks are maintained.
5.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from
	adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting
	rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior
	spaces and the attic area by means of $\frac{1}{2}$ inch gypsum board or the equivalent applied to the garage means of $\frac{1}{2}$ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National
0.	Mechanical Code/1993). Chapter 12 & NFPA 211
7.	Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's
~	building code.
8.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum
	height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and
	public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a
	diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
	(Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)
	Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections
9.	1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7) Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
9. 10.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum
	11" tread. 7" maximum rise. (Section 1014.0)
11.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8") 1014.4

12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special

knowledge or separate tools. Where windows are provided as <u>means of egress or rescue</u> they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)

- 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. Section 1010.1
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) Section 710.0
- 15. The boiler shall be protected by enclosing with (1) hour fue-rated construction including fire doors and ceiling, or by providing automatic extinguishment. Table 302.1.1
- 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. Section 921.0
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. (crawl spaces & attics)
- 24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- 26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 28. Please read and implement the attached Land Use-Zoning report requirements.
- 29. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.3. of the City's building code.
- 30. Glass and glazing shall meet the requirements of Chapter 24 of the building code.

This permit is being issued with the understanding That Canpones meets the requirements of section 3105.0 ★31. OF MOCA NATIONAL BUILDING CODE/1996. Ø. Codp' The

Þ whethoff the Building Inspector cc: Lt. McDougatt, PFD

Marge Schmuckal, Zoning Administrator

PSH 8-1-98