Location of Construction:	Owner:		Phone:		Permit No: O 80737
37 can bt	1990 M. M. C			774-114	900101
Owner Address:	Lessee/Buyer's Name:	, Phone:	Busines	ssName:	DEDMIT LOCUED
	Ju 75 2 4 3 W	lp.			J. PERMIT ISSUED
Contractor Name:	Address:	Pho		To New York	- Issued.
Past Use:	Proposed Use:	COST OF WO	7410t RK•	7 to 3 to 7 to 7 to 7 to 7 to 7 to 7 to	JUL - 7 1998
i asi Use.	Troposed osc.	\$ 7,000	0.09	\$ 25.00	JOL 1 1000
esar Suice			Denied	INSPECTION: Use Group: Type:	Zone: CBL:
Proposed Project Description:			11/1/	Signature: ES DISTRICT (P.A.D.)	Zoning Approval:
semuva approx 15 ikmen derostari epprox 25 lid	e evet om em beming partitione war skat ek pathitien tale sient, palit, etc.	Action:	Approved	with Conditions: [Special Zone or Reviews: Shoreland Wetland Flood Zone Subdivision
Permit Taken By:	Date Applied For:	Signature:		Date:	☐ Site Plan maj ☐minor ☐mm
 Building permits do not include pl Building permits are void if work is tion may invalidate a building permits. 	s not started within six (6) months of the date of is	ssuance. False informa	_	37 - 1+-2 Epm	☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied Historic Preservation ☐ Not in District or Landmark
			.14	PERMIT ISSUED REQUIREMENTS	□ Does Not Require Review □ Requires Review Action:
authorized by the owner to make this a if a permit for work described in the ap	CERTIFICATION ecord of the named property, or that the proposed pplication as his authorized agent and I agree to a plication is issued, I certify that the code official? asonable hour to enforce the provisions of the co	conform to all applica s authorized represent	ible laws of thative shall ha	nis jurisdiction. In addition	n, ☐ Denied
		50 July 1996			
	ADDRECC	DATE:		PHONE:	—
SIGNATURE OF APPLICANT	ADDRESS:	DAIL.		THORIE.	

BUILDING PERMIT REPORT

DATE: 7/-6/5/	ADDRESS:	57 0.k st
REASON FOR PERMIT:	renovitioni	
BUILDING OWNER:	Bahman Nikoja	
	<u> </u>	
use group	BOCA 1996	CONSTRUCTION TYPE 3.13
	CONDITION(S)	OF APPROVAL

This Permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: $\frac{4}{1}$ $\frac{17}{19}$ $\frac{19}{26}$ $\frac{1}{42}$ \frac

- 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 - 2.5 Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material.
 - 3. Precaution must be taken to protect concrete from freezing.
 - 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 - 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 - 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
 - 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
 - 8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".
 - 9. Headroom in habitable space is a minimum of 7'6".
 - 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
 - 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
 - 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension

	shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
13.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
14.	All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
15.	The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
16.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms
	In each story within a dwelling unit, including basements
_	In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)
17.	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
18.	The Fire Alarm System shall be maintained to NFPA #72 Standard.
18. (2)	The Sprinkler System shall maintained to NFPA #13 Standard.
(0)	All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
21.	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
22.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
23.	Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. (crawl spaces & attics)
24.	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
25.	All requirements must be met before a final Certificate of Occupancy is issued.
⊋ 6.	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
27.	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
28 . 29.	Please read and implement the attached Land Use-Zoning report requirements. ANN holes in otto certing holes must be patched before
	Installing New Colling
30.	
31.	

In stalling		7,	 	
			 _	
			 	 -
	···			
	_			
		<u> </u>		

P. Samuel Hoffses, Building Inspector G. Lt. McDougall, PFD

Marge Schmuckal

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.


Location/Addressof Construction (include Portion of Building): 57 0	AK ST. PORTO	and
Total Square Footage of Proposed Structure	Square Footage of Lot	OX 6005.7.
Tax Assessor's Chart, Block & Lot Number Chart# 037 Block# H Lot#025 BAH	MAN NEKOPE	Telephone#: 7941967
Owner's Address (CARRA 979360 Lessee/Buyer's N HU COTTOCK PARK PO PORTURNE, ME	ame (If Applicable)	Cost Of Work: Fee \$ 7.2 0 0 . 00\$ 55
Proposed Project Description: (Please be as specific as possible) PENOUF APPLIX 25 LINK, PINT, TION, RESYSTAIR OFFICE REW SESPENDE CHILING, TILE Contractor's Name, Address & Telephone	AL FREN OF 100 25 LINEAL FEEL FLOOR PHINE E	N BARLING. TOT PARITION AT. NU
SPERO DYER 25 NEW YO	nt mt Da. por	161-1967
Current Use: HAIR JALON	Proposed Use: 17 14 /2 0	PLON
2) A Copy of your Constru 3) A Plot Pla Minor or Major site plan review will be required for the above prop checklist outlines the minimum standards for a site plan.	ance with the State of Maine Plu ational Electrical Code as amer lation must comply with the Curchase and Sale Agreement action Contract, if available an/Site Plan osed projects. The attached ang Plans is must be designed by a register g elements of construction:	umbing Code. Inded by Section 6-Art III. INSPECTION INS
 Floor Plans & Elevations Window and door schedules Foundation plans with required drainage and dampproofing Electrical and plumbing layout. Mechanical drawings for equipment, HVAC equipment (air handling) or other types 	any specialized equipment such as of work that may require special ication osed work is authorized by the owner applicable laws of this jurisdiction. In additional content is a special content in the content is applicable laws of this jurisdiction. In additional content is applicable laws of this jurisdiction.	d d to I have been utilized by e

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Date:

Signature of applicant:

Additional Site review and related fees are attached on a separate addendum

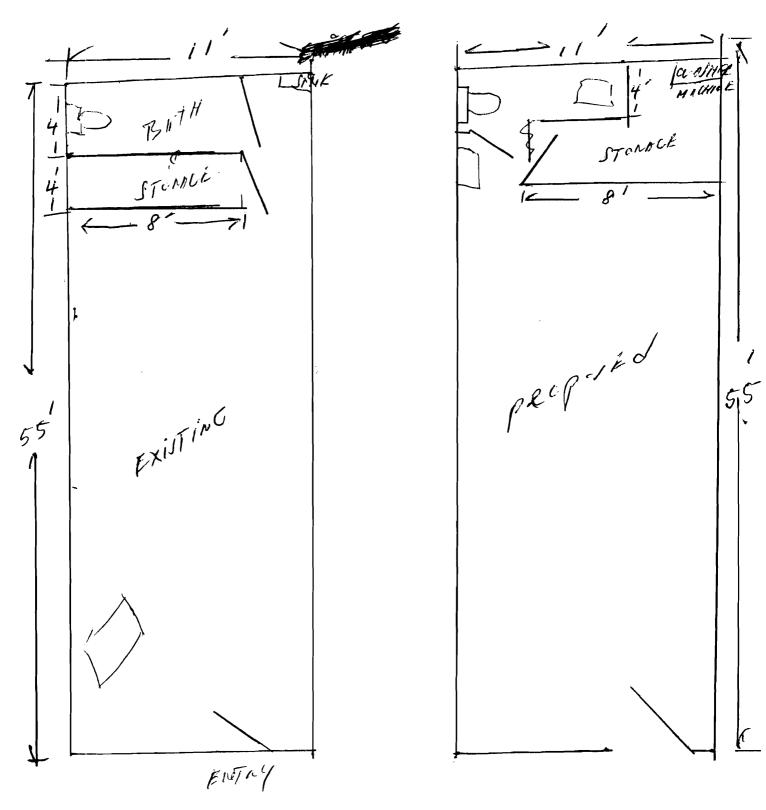

1 REILING 9FT SCIPENDED

2 2×4 MNd2×6 WOOD FRAME PMTITIONS

3 5" DRYWOLL FINISH TAPED

4 NEW FLOORING INTIME MAP CERTAINE

5 PELOCOTE MINDLY WITHER

5 FELOCOTE MINDLY WOLHER