### City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:		Phone:		Permit No:
2 Free St	Southern Maine	Properties Co.			The second se
Owner Address:	Lessee/Buyer's Name: Ponctillio/Joseph Loggio	Phone:	BusinessN	lame:	PER TSSUED
Contractor Name:	Address:	Phone			Permit Issued: AUG 1 2 1999
Past Use:	Proposed Use:	COST OF WORL \$ 7.39 sq.		PERMIT FEE:	AUG
Retail	Sane	FIRE DEPT.	Approved I	NSPECTION: Use Group: Type:	CITY OF PORTLAND
		Signature:	6	BOCA TO ALL	Zone: CBL:038-A-001
Proposed Project Description:				DISTRICT (P.A.D.)	Zoning Approval:
Proposed Store Sign		1		h Conditions:	□ Shoreland
-	· ·	Signature:		Date:	
Permit Taken By:	Date Applied For:	JETH August 2.	1000		Site Plan maj Dminor Dmm D
<ol> <li>Building permits do not include plumbing,</li> <li>Building permits are void if work is not start tion may invalidate a building permit and st</li> </ol>	ed within six (6) months of the date of is				□ Miscellaneous □ Conditional Use □ Interpretation □ Approved □ Denied Historic Preservation □ Not in District or Landmark □ Does Not Require Review
			WITH RE	QUIREMENTS	CRequires Review
I hereby certify that I am the owner of record of t authorized by the owner to make this applicatior if a permit for work described in the application areas covered by such permit at any reasonable I	as his authorized agent and I agree to c is issued, I certify that the code official's	conform to all applicable s authorized representati	e laws of this ve shall have	jurisdiction. In addition,	
		August 2, 1	999		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	Р	HONE:	-
RESPONSIBLE PERSON IN CHARGE OF WO	RK, TITLE		P	HONE:	
White-F	Permit Desk Green-Assessor's Ca	nary-D.P.W. Pink-Pu	blic File Ivo	ory Card-Inspector	

1

# THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

#### Sign Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building)	2 PREF SMEET
Total Square Footage of Proposed Structure	Square Footage of Lot
Tax Assessor's Chart, Block & Lot Number Chart# 38Block# 14 Lot# 000/	Owner: GOUTHONN MAINE PROPENTES CO
Owner's Address:	Lessee/Buyer's Name (If Applicable) DEPH Total Sq. Ft. of Sign Fee PUNCTUO LOEGIA 7.39 \$3142
Proposed Project Description: (Please be as specific as possible) PROJECTED STORE SIG	N
Contractor's Name, Address & Telephone	lencon Rec'd By
Current Use: Retal	Proposed Use: Serve

Signature of applicant:	dry-	Date: 8/2/99
	Signage Fermit Fee: \$30.00 plus .20 per squa	are foot of signage
	828-1450 pourme	>
	Call for P/U	DEPT. OF BUILDING INSPECTION CITY OF PORTLAND, ME
	$\mathcal{O}$	AUG - 2 1999
		LUEGEIVE

### SIGNAGE PRE-APPLICATION

PLEASE ANSWER ALL QUESTIONS
ADDRESS: 2 PREE SMEET ZONE: B-)
OWNER: SOUTHERN MAINE PROPERTIES (°.
APPLICANT: PUNCTILIO (2050PH LOGGIA)
ASSESSOR NO. $038 - 14 - 001$
SINGLE TENANT LOT? YES NO MULTI TENANT LOT? YES NO FREESTANDING SIGN? YES NO DIMENSIONS_28'' × 38'' = 1064 <sup>#</sup> -144-
(ex. pole sign) MORE THAN ONE SIGN? YES NO DIMENSIONS 7,384 BLDG. WALL SIGN? YES NO DIMENSIONS 7,384
(attached to bIdg)
MORE THAN ONE SIGN? YES NO DIMENSIONS
LIST ALL EXISTING SIGNAGE AND THEIR DIMENSIONS:
LOT FRONTAGE (FEET):
HEIGHT OF AWNING:
IS THERE ANY COMMUNICATION, MESSAGE, TRADEMARK OR SYMBOL ON IT? *** TENANT BLDG. FRONTAGE (IN FEET) $20 \times 2 = 564$ *** REQUIRED INFORMATION
AREA FOR COMPUTATION
1.392
A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE EXISTING AND NEW SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES AND/OR PICTURES OF PROPOSED ARE ALSO REQUIRED.
SIGNATURE OF APPLICANT:

#### OWNERS CONSENT AND AGREEMENT

1, Southern Maine Properties Co., being the owner of the premises located at 2-16 Free Sr.

in Portland, Maine, hereby give consent to the erection of a certain Sign/awning/banner owned by Loggia dba foncticle over the sidewalk or on building from said premises as described in application to the Division of Inspection Services.


And in consideration of the issuance of said permit, owner of said premises, in event said sign shall cease to serve the purpose for which it was erected or shall become dangerous and in event the owner of said sign shall fail to remove said sign or make it permanently safe in case the sign still serves the purpose for which it was erected, hereby agrees for himself or itself, for his heirs, its successors, and his or its assigns, to complete remove said sign.


Signature of Property Owner

Signature of Lessee

Le-l-Date

Date

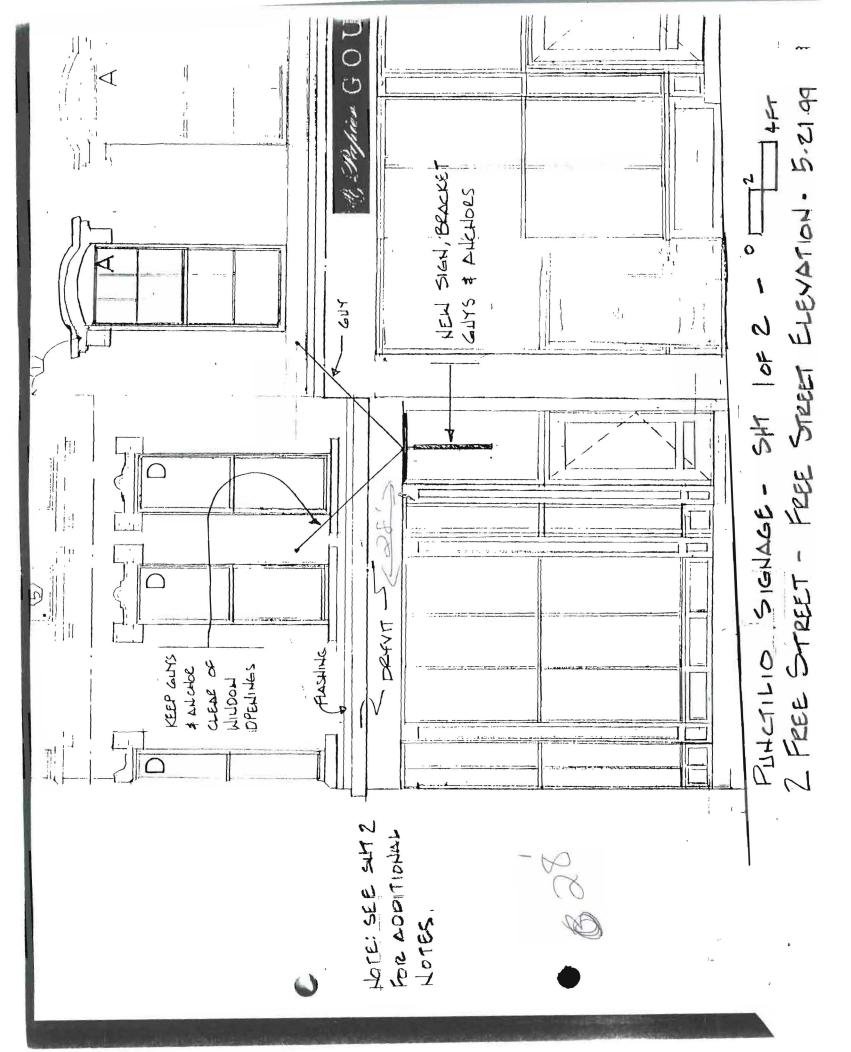


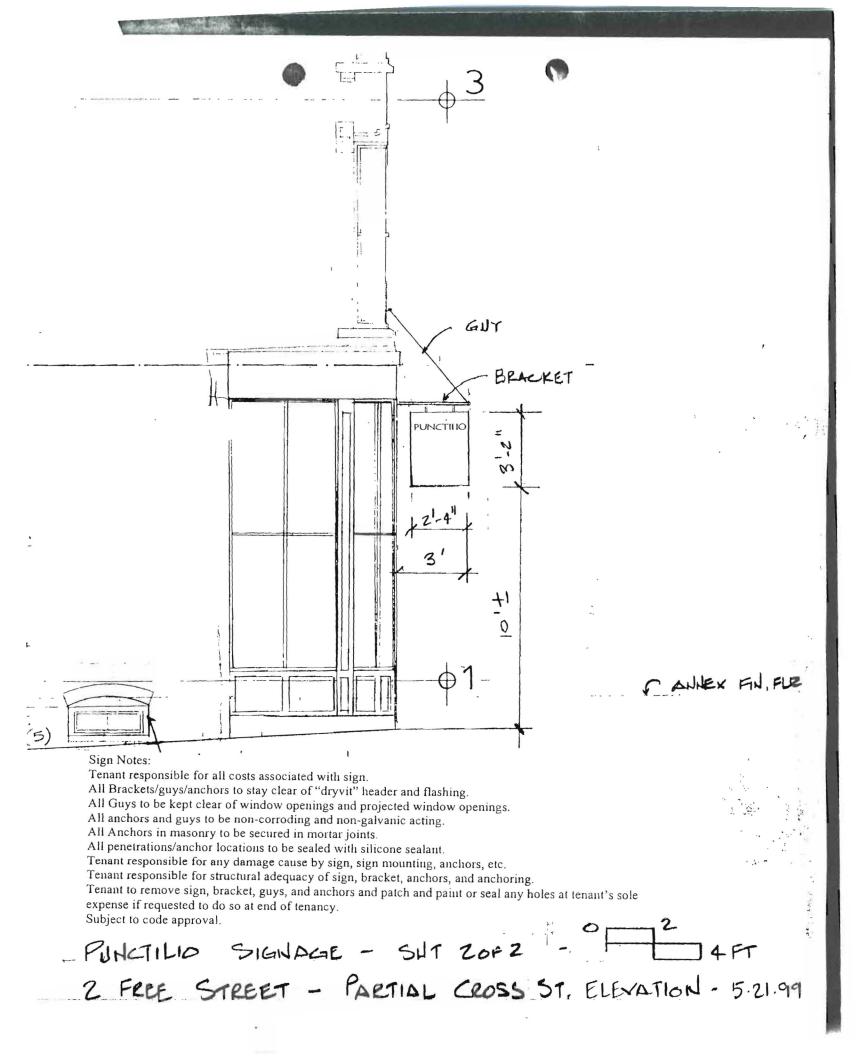

MCTILIO

PHONE NO. : 207 967 5451

May. 10 1999 02:46PM P2

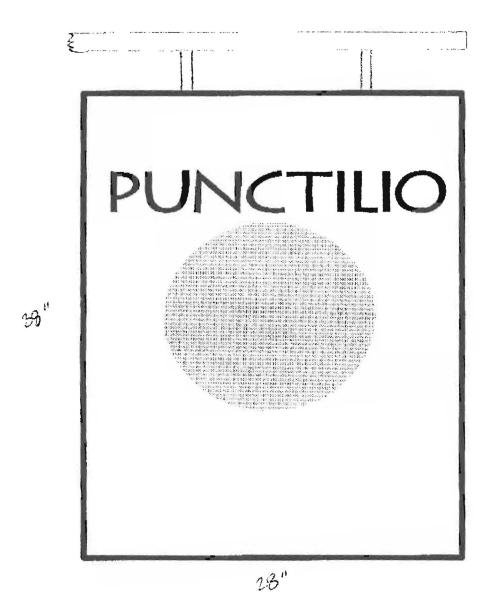

ALSO PROPOSING "60005 NELL" ILLUMINATION IN ACCORDANCE WITH CODES "FANSTOS

Mlog-

	BUILDING PERMIT REPORT				
	DATE:	2/Aug/99 ADDRESS: 2 Free ST. CBL: 038-A-00/			
	REASON FOR PERMIT: SIGNAGE (Sidewalk)				
	BUILE	UNGOWNER: Southern MAINE ProperTies Co			
	PERM	IT APPLICANT:/Contractor/			
	USE G	ROUPSIGN GAR (S.d. walk) CONSTRUCTION TYPE			
	The City's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)				
		CONDITION(S) OF APPROVAL			
	This pe	rmit is being issued with the understanding that the following conditions are met: $\frac{\kappa}{34}$			
		red with the following conditions:			
Y	1.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.			
-	2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)			
	3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than			
		10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the			
		footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter			
		membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor			
		elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be			
		placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2			
	4.	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and			
	-	a maximum 6' o.c. between bolts. (Section 2305.17)			
	5. 6.	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0			
	7.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify			
		that the proper setbacks are maintained.			
	8.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent			
		interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private			
		garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area			
		by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)			
	9.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National			
		Mechanical Code/1993). Chapter 12 & NFPA 211			
	10.	Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building			
	194	Code.			
	11.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use			
		Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open			
		parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through			
		any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but			
		not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section			
		with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of			
		stairway. (Section 1014.7)			
	12.	Headroom in habitable space is a minimum of 76". (Section 1204.0) Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11"			
L	13.	tread, 7" maximum rise. (Section 1014.0)			
1	4.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4			
	5.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door			
		approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate			
		tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above			
		the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches			
		(610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.			

(Section 1018.6)
16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
- 18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
  - In the immediate vicinity of bedrooms
  - In all bedrooms
  - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-I shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min.72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
  Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code 1996).

1996).	
35.	
36.	
37	
57.	

38. Ises, Building Inspector HO Lt. McDougall, PFD Marge Schmuckal, Zoning Administrator

PSI17/24/20

\*\*On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

## PUNCTILIO

DOLORES LOGGIA

53 WESTERN AVENUE LOWER VILLAGE KENNEBUNK, MAINE 04043 207 967-5451

20