cation of Construction: Owner: Portland Sq. Owner: One Portland Sq.		d Sa	Phone:		Permit No 8	
Owner Address:	Lessee/Buyer's Name:	Phone:	Business	Name:	PERMIT ISSUED	
Contractor Name: Siebura Brus Construction Address: D8 Et 1 197 Scarborougn, ME 04074 Phone: 04074					Permit Issued:	
Past Use:	Proposed Use:	\$ 50,000.0		PERMIT FEE: \$ 270,00	APR 1 0 1998	
Office	Sana	FIRE DEPT.	Approved Denied	INSPECTION: Use Group: Type:	CITY OF PORTLAND	
		Signature:		Signature:	Zone: CBL: 038-5-001	
Proposed Project Description:		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved with Conditions:		Zoning Approval: Special Zone or Reviews:		
Hake Interior Kennyatmons	- 1st fleer	Signature:	Denied	Date:	L Chololalia	
Permit Taken By:	Date Applied For:	07 April	1998		☐ Site Plan maj ☐minor ☐mm ☐	
 This permit application does not preclude the Building permits do not include plumbing, so Building permits are void if work is not starte tion may invalidate a building permit and sto 	eptic or electrical work. d within six (6) months of the date of is				☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied	
			PERI WITH RE	MIT ISSUED QUIREMENTS	Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:	
I hereby certify that I am the owner of record of th authorized by the owner to make this application if a permit for work described in the application is areas covered by such permit at any reasonable h	as his authorized agent and I agree to cossissued, I certify that the code official's	conform to all applicab s authorized representa	le laws of this	s jurisdiction. In addition	□Denied	
SIGNATURE OF APPLICANT STAR MATTER	ADDRESS:	DATE:		PHÖNE:		
RESPONSIBLE PERSON IN CHARGE OF WOR	K, TITLE			PHONE:	CEO DISTRICT	
	ermit Desk Green-Assessor's Ca	nary-D.P.W. Pink-Pi			Z Z	

RIIII DING PERMIT REPORT

	DOLLD HIGHT REPORT			
DATE:_	4/9/61 ADDRESS: 1 12 1 and 5 1 50 F1 038-13-001			
REASO	N FOR PERMIT: 1-1-0 + 160)			
	NG OWNER: FIG. 7.			
	ACTOR. Nish is Bres			
	TAPPLICANT: Strange William			
	OUPBOCA 1996 CONSTRUCTION TYPE			
	CONDITION(S) OF APPROVAL			
This Pe	rmit is being issued with the understanding that the following conditions are met:			
Approv	ed with the following conditions: $\frac{*}{1}$, $\frac{*}{12}$, $\frac{*}{18}$, $\frac{*}{19}$, $\frac{*}{20}$, $\frac{*}{24}$			
1	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.			
2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)			
2	Proposition must be talken to metast as sent from from from			

- Precaution must be taken to protect concrete from freezing.
- It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCN 1996)
- All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National 6 Mechanical Code/1993).
- Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's
- Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36" In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".
- Headroom in habitable space is a minimum of 7'6"
- Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 10. 11" tread. 7" maximum rise.
- The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 11
- Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or 12. exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it 13. exits directly from the apartment to the building exterior with no communications to other apartment units.
- All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self 14. closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
- The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing 15. automatic extinguishment.
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the 16.

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an The Fire Alarm System shall be maintained to NFPA #72 Standard. The Sprinkler System shall maintained to NFPA #13 Standard. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996) Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year". The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. All requirements must be met before a final Certificate of Occupancy is issued. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996). Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). Please read and implement the attached Land Use-Zoning report requirements.

Code Enforcement

cc: Lt. McDougail, PFD Marge Schmuckal

(17.)

(18.)

19

20.

21

22.

23.

26.

27


28.

29.

30.

31

32.

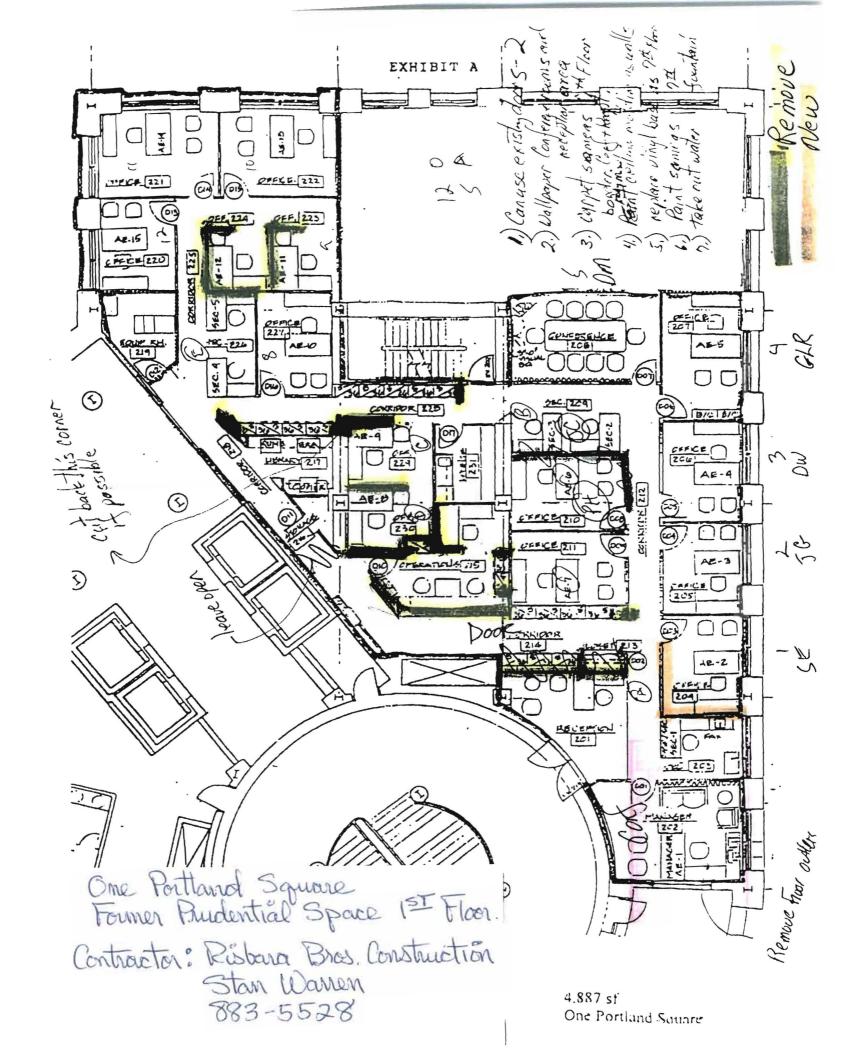





CITY OF PORTLAND, MAINE

Department of Building Inspection

Certificate of Occupancy

LOCATION

1 Portland Sq

038-B-001

Issued to

MGI One Portland Sq

Date of Issue

08 May 1998

This is to certify that the building, premises, or part thereof, at the above location, built — altered — changed as to use under Building Permit No. 980344 , has had final inspection, has been found to conform substantially to requirements of Zoning Ordinance and Building Code of the City, and is hereby approved for occupancy or use, limited or otherwise, as indicated below.

PORTION OF BUILDING OR PREMISES

APPROVED OCCUPANCY

Office/First Floor

Office Peoples Heritage

Limiting Conditions:

This certificate supersedes certificate issued

Approved:

Inspector

Inspector of Buildings

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from owner to owner when property changes hands. Copy will be furnished to owner or lessee for one dollar.