

CBU: 03A-B-002

RISBARA BROS. CONSTRUCTION

When Quality Counts

RESIDENTIAL • COMMERCIAL • EARTHWORKS

DATE: 3/3/08

TO: Michael A. Collins @FAX# 874 8716
CITY OF PORTLAND

FROM: JEFF DOBSON

OF PAGES
(including cover): 2

For personal and confidential reasons please distribute to addressees. THANK YOU.

COMMENTS

Michael: RE: TWO PORTLAND SQUARE
ATTACHED IS A COPY OF THE DATA SHEET FOR
PAINT USED ON PLYWOOD BLOCKING AS
REQUESTED.

Thank you

Jeff

X1102

RISBARA BROS. CONSTRUCTION

When Quality Counts

RESIDENTIAL • COMMERCIAL • EARTHWORKS

DATE: 3/4/08

TO: Michael Collins @FAX# 874-8716

CITY OF PORTLAND

FROM: JEFF DOBSON

OF PAGES
(including cover): 4

For personal and confidential reasons please distribute to addressee. THANK YOU.

COMMENTS

Michael: RE: TWO PORTLAND SQUARE
ATTACHED IS ADDITIONAL INFORMATION AS YOU
REQUESTED. PLEASE LET ME KNOW IF THIS
IS NOT WHAT YOU NEED.

Thank you





For the Home	For Architects and Designers	For Contractors
Business Resources	Products and Specs	Color Tools


For Contractors -> Products & Specifications -> Industrial Coatings -> Spec M59

- Product Catalog Search »
- Interior Products »
- Exterior Products »
- Industrial Coatings »**
- Tools of the Trade »
- Featured Products »
- VOC Laws »
- Technical Information »

220 Latex Fire Retardant Coating

E-mail to a Friend » Add to Favorites »

- Product Description »
- Features »
- Colors Available »
- Gloss »
- Clean Up »
- Resin Type »
- Recommended Use »

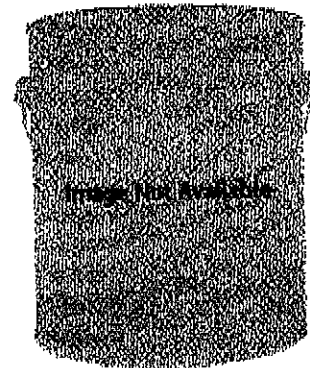

Product Search

Lookup product information including product features, MSDS files, and TDS files.

Search Now! »



Product Description

A premium quality, decorative, intumescent, fire retardant paint for interior and trim. 220 Latex Fire Retardant Coating (M59) provides a high hiding, fl that is washable and easy to apply with no unpleasant odor.

Features

- When attacked by flame, 220 (M59) expands and forms a thick cell (intumescence) which, by reducing excessive heat penetration, retards and minimizes smoke development
- Applies like a conventional latex flat paint
- Dries to a decorative matte finish
- Low Odor
- No VOC content
- No unpleasant odor during application
- Washes without spotting or loss of intumescence

Colors Available: White*

Gloss: 10% max.

Clean Up: Water

MSDS #: MS9. nMS9

Page 3

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE:

Do not throw or drop containers.

OTHER PRECAUTIONS :

Avoid contact with eyes and prolonged contact with skin or breathing of spray mist or sanding dust.

Close container after each use. Keep out of reach of children. Do not take internally.

SECTION XX

HMIS (Hazardous Materials Identification System) (R) NFCA
HMIS is a recognized workplace Hazard Communications System as required by OSHA (29 CFR 1910.1200). Information on establishing a compliant hazardous communication program using HMIS is available from:

American Labelmark Co., Inc., Labelmaster Division
5724 N. Pulaski Rd., Chicago, IL 60646
1-800-621-5808

The ratings assigned by Benjamin Moore & Co. are only suggested ratings; the contractor/employer has ultimate responsibility for HMIS rating where this system is used.

PERSONAL PROTECTION: This code is left blank on Benjamin Moore & Co. MSDS's as it depends on application technique and the workplace ventilation.

Please read Sections II through IX of this MSDS before deciding on appropriate protective equipment and beginning work. There are codes available for this section which can be obtained from Labelmaster.

Note: There are no SARA reportable materials in this product.

DISCLAIMER

The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.

NOTICE: Removal of old paint by sanding, scraping or other means may generate dust or fumes which contain lead. Exposure to lead dust or fumes may cause adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For additional information, contact the USEPA/Lead Information Hotline at 1-800-HEAP-FY1.

MSDS #: M59, nM59

Closed containers may burst if exposed to extreme heat or fire.
SPECIAL FIRE FIGHTING PROCEDURES:
 Cool exposed containers with water. Use self-contained breathing apparatus.

SECTION V HEALTH HAZARD DATA

EFFECTS OF OVEREXPOSURE - ACUTE:
 Inhalation - Irritation of the respiratory tract.
 Skin and Eye Contact - Primary irritation.
 Ingestion of large amounts could cause serious injury.

EFFECTS OF OVEREXPOSURE - CHRONIC:

None Known

MEDICAL CONDITIONS PRONE TO AGGRAVATION BY EXPOSURE:
 None expected when used in accordance with Safe Handling and Use information (Section VIII).

PRIMARY ROUTE(S) OF ENTRY: DERMAL INHALATION INGESTION

EMERGENCY AND FIRST AID PROCEDURES:

Inhalation - Remove to fresh air. Get medical help for any breathing difficulty.

Eye Contact - Flush thoroughly with water. Call physician.

Skin Contact - Wash with soap and water.

Ingestion - Drink 1 or 2 glasses of water to dilute.

DO NOT induce vomiting. Call physician.

SECTION VI REACTIVITY DATA

STABILITY: STABLE HAZARDOUS POLYMERIZATION WILL NOT OCCUR
CONDITIONS TO AVOID: Elevated temperatures

HAZARDOUS DECOMPOSITION PRODUCTS:
 Burning may produce carbon dioxide and carbon monoxide.

INCOMPATIBILITY (MATERIALS TO AVOID): None reasonably foreseeable.

SECTION VII SPILL OR LEAK PROCEDURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:
 Flush with water. Absorb with sawdust or rags.

WASTE DISPOSAL METHOD:

Conventional procedures in compliance with local, state and federal regulations. Do not incinerate sealed containers.

SECTION VIII SAFE HANDLING AND USE INFORMATION

RESPIRATORY PROTECTION:

Use NIOSH approved respirator specified for protection against paint spray mist and sanding dust in restricted or confined areas.

VENTILATION:

Adequate to maintain working atmosphere below T.L.V. and L.E.L. (See Sect. II for ingredient data and concentrations). Mechanical exhaust may be required in confined areas.

PROTECTIVE GLOVES: Waterproof during repeated contact.

EYE PROTECTION: Splash goggles or safety glasses with side shields.

OTHER PROTECTIVE EQUIPMENT: Clothing adequate to protect skin.

HYGIENIC PRACTICES:

Remove and wash clothing before reuse. Wash hands before eating, smoking or using the washroom.

SECTION IX SPECIAL PRECAUTIONS
