


Project Name PORTLAND ME - LUMINATO CONDOMINIUMS - CONSTRUCTION
MATERIALS TESTING SERVICES
Client LUMINATO CONDOMINIUM, LLC
Material Type AGGREGATE SUBBASE
Material Source STOREY BROTHERS - CUMBERLAND


Project Number 16-0910
Lab ID 21416G
Date Received 9/8/2016
Date Completed 9/8/2016
Tested By PAUL SHAFFER

<u>STANDARD DESIGNATION (mm/μm)</u>	<u>SIEVE SIZE</u>	<u>AMOUNT PASSING (%)</u>	<u>2015 MDOT 703.06 TYPE D SPECIFICATIONS (%)</u>
150 mm	6"	100	100
125 mm	5"	100	
100 mm	4"	100	
75 mm	3"	100	
50 mm	2"	75	
38.1 mm	1-1/2"	66	
25.0 mm	1"	58	
19.0 mm	3/4"	53	
12.5 mm	1/2"	48	35 - 80
6.3 mm	1/4"	40	25 - 65
4.75 mm	No. 4	37	
2.00 mm	No. 10	29	
850 μm	No. 20	19	
425 μm	No. 40	14	0 - 30
250 μm	No. 60	10	
150 μm	No. 100	6	
75 μm	No. 200	3.3	0.0 - 7.0

SAMPLE MEETS SPECIFICATION

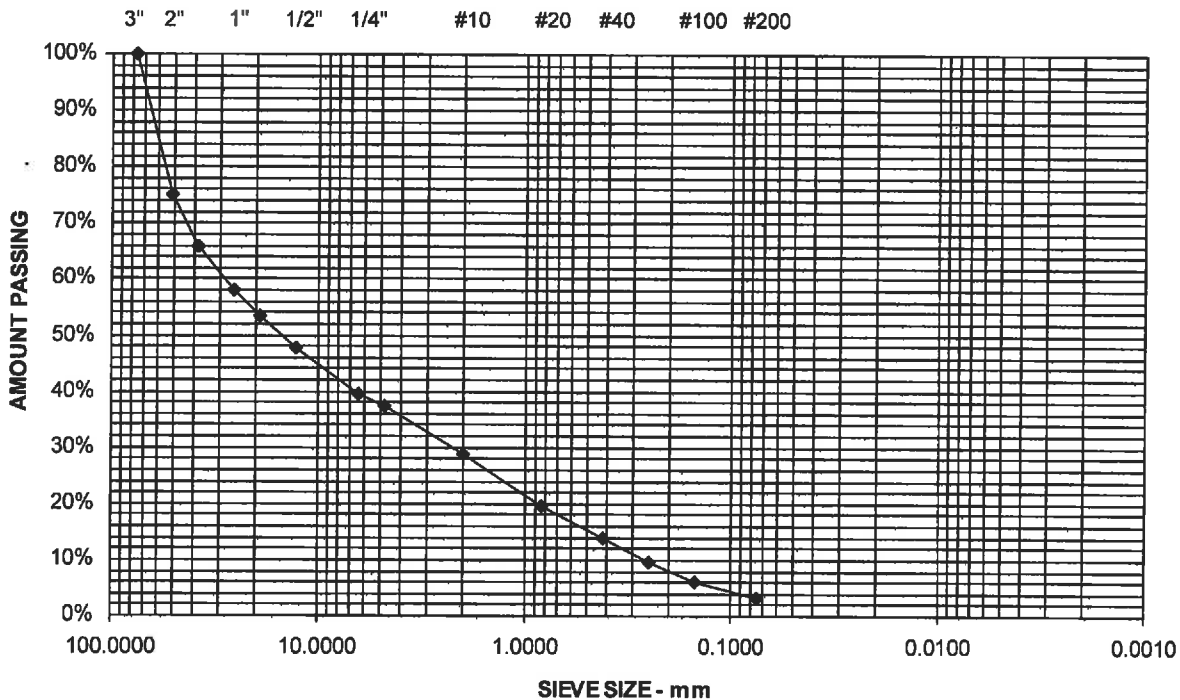

Comments


Roger E. Domingo