

## DESCRIPTION

The patent pending Lumark Crosstour™ LED Wall Pack Series of luminaires provides an architectural style with super bright, energy efficient LEDs. The low-profile, rugged die-cast aluminum construction, universal back box, stainless steel hardware along with a sealed and gasketed optical compartment make the Crosstour impervious to contaminants. The Crosstour wall luminaire is ideal for wall/surface, inverted mount for façade/canopy illumination, post/bollard and low level pathway illumination including stairs. Typical applications include building entrances, multi-use facilities, apartment buildings, institutions, schools, stairways and loading docks.

## SPECIFICATION FEATURES

### Construction

Slim, low profile LED design with rugged one-piece, die-cast aluminum hinged removable door and back box. Matching housing styles incorporate both a small and large design. The small housing is available in 10W and 20W. The large housing is available in the 30W model. Patent pending secure lock hinge feature allows for safe and easy tool-less electrical connections with the supplied lever-lock connectors. Back box includes three (3) half-inch, NPT threaded conduit entry points. The universal back box supports both the small and large forms and mounts to standard 3-1/2" to 4" round and octagonal, 4" square, single gang and masonry junction boxes. Key hole gasket allows for adaptation to junction box or wall. External fin design extracts heat from the fixture surface. One-piece silicone gasket seals door and back box. Not recommended for car wash applications.

### Optical

Silicone sealed optical LED chamber incorporates a custom engineered mirrored anodized reflector providing high-efficiency illumination. Optical assembly includes impact-resistant tempered glass and meets IESNA requirements for full cutoff compliance. Solid state LED Crosstour luminaires are thermally optimized with five (5) lumen packages in cool 5000K or neutral warm 3500K LED color temperature (CCT).

### Electrical

LED driver is mounted to the die-cast housing for optimal heat sinking. LED thermal management system incorporates both conduction and natural convection to transfer heat rapidly away from the LED source. 10W models operate in -40°C to 40°C [-40°F to 104°F]. 20W and 30W models operate in -30°C to 40°C [-22°F to 104°F]. Crosstour luminaires

Catalog #		Type
Project		
Comments		Date
Prepared by		

maintain greater than 70% of initial light output after 50,000 hours of operation. Three (3) half-inch NPT threaded conduit entry points allow for thru-branch wiring. Back box is an authorized electrical wiring compartment. Integral LED electronic driver incorporates surge protection. 10W, 120V 50/60 Hz., 20W and 30W, 120-277V 50/60Hz.

### Finish

Crosstour is protected with a Super TGIC carbon bronze or summit white polyester powder coat paint. SuperTGIC powder coat paint finishes withstand extreme climate conditions while providing optimal color and gloss retention of the installed life.

### Warranty

Crosstour features a five-year limited warranty.




## XTOR CROSSTOUR LED

WALL / SURFACE MOUNT  
POST / BOLLARD MOUNT  
LOW LEVEL MOUNT  
INVERTED MOUNT

Sustainable Design

DESIGNLIGHTS  
CONSORTIUM

## DIMENSIONS

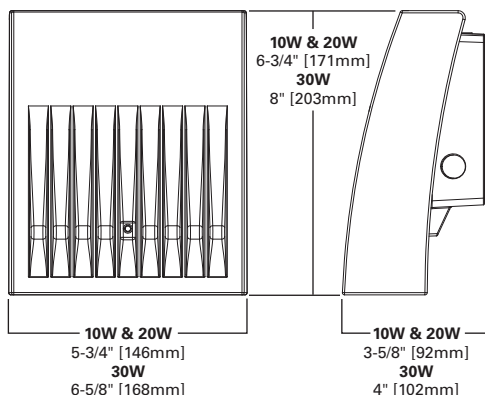

## CERTIFICATION DATA

UL/cUL Wet Location Listed  
IP66 Ingress Protection Rated  
ADA Compliant  
LM79 / LM80 Compliant  
ROHS Compliant  
ARRA Compliant  
DLC Qualified Models  
Lighting Facts® Approved  
Title 24 Compliant  
NOM Compliant Models

## TECHNICAL DATA

40°C Maximum Ambient Temperature  
External Supply Wiring 90°C Minimum

## EPA


Effective Projected Area:  
(Sq. Ft.)  
XTOR1A/XTOR2A=0.34  
XTOR3A = 0.45

## SHIPPING DATA:

Approximate Net Weight:  
3.7 – 5.25 lbs. [1.7 – 2.4 kgs.]

**ORDERING INFORMATION**

SAMPLE NUMBER: XTOR2A-N-WT-PC1

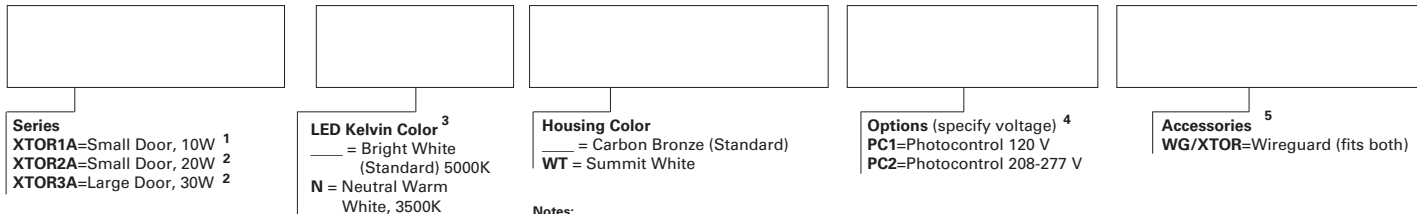

**Series**  
**XTOR1A**=Small Door, 10W <sup>1</sup>  
**XTOR2A**=Small Door, 20W <sup>2</sup>  
**XTOR3A**=Large Door, 30W <sup>2</sup>

**LED Kelvin Color** <sup>3</sup>  
 \_\_\_ = Bright White  
 (Standard) 5000K  
**N** = Neutral Warm  
 White, 3500K

**Housing Color**  
 \_\_\_ = Carbon Bronze (Standard)  
**WT** = Summit White

**Options** (specify voltage) <sup>4</sup>  
**PC1**=Photocontrol 120 V  
**PC2**=Photocontrol 208-277 V

**Accessories** <sup>5</sup>  
**WG/XTOR**=Wireguard (fits both)

- Notes:**  
 1 120V only XTOR1A not available in 3500K.  
 2 Design Lights Consortium™ qualified (down mount only).  
 Consult Design Lights Consortium website for all applications.  
 3 PC2 only available in 20W and 30W models.  
 4 PC1 and PC2 photo controls are factory installed. PC2 not available on XTOR1A models.  
 5 Order WG/XTOR wire guard separately.

**STOCK ORDERING INFORMATION**

10W Series	20W Series	30W Series
XTOR1A = 10W, 5000K, Carbon Bronze	XTOR2A = 20W, 5000K, Carbon Bronze	XTOR3A = 30W, 5000K, Carbon Bronze
XTOR1A-WT = 10W, 5000K, Summit White	XTOR2A-N = 20W, 3500K, Carbon Bronze	XTOR3A-N = 30W, 3500K, Carbon Bronze
XTOR1A-PC1 = 10W, 5000K, 120V PC, Carbon Bronze	XTOR2A-WT = 20W, Summit White	XTOR3A-WT = 30W, Summit White
	XTOR2A-PC1 = 20W, 120V PC, Carbon Bronze	XTOR3A-PC1 = 30W, 120V PC, Carbon Bronze



**5-DAY QUICK SHIP ORDERING INFORMATION**

10W Series	20W Series	30W Series
XTOR1A-WT-PC1 = 10W, 5000K, Summit White, 120V PC	XTOR2A-PC2 = 20W, 5000K, 208-277V PC, Carbon Bronze	XTOR3A-PC2 = 30W, 5000K, 208-277V PC, Carbon Bronze
	XTOR2A-WT-PC1 = 20W, 5000K, Summit White, 120V PC	XTOR3A-WT-PC1 = 30W, 5000K, Summit White, 120V PC
	XTOR2A-WT-PC2 = 20W, 5000K, Summit White, 208-277V PC	XTOR3A-WT-PC2 = 30W, 5000K, Summit White, 208-277V PC
	XTOR2A-N-WT = 20W, 3500K, Summit White	XTOR3A-N-WT = 30W, 3500K, Summit White
	XTOR2A-N-PC1 = 20W, 3500K, 120V PC, Carbon Bronze	XTOR3A-N-PC1 = 30W, 3500K, 120V PC, Carbon Bronze
	XTOR2A-N-PC2 = 20W, 3500K, 208-277V PC, Carbon Bronze	XTOR3A-N-PC2 = 30W, 3500K, 208-277V PC, Carbon Bronze
	XTOR2A-N-WT-PC1 = 20W, 3500K, Summit White, 120V PC	XTOR3A-N-WT-PC1 = 30W, 3500K, Summit White, 120V PC
	XTOR2A-N-WT-PC2 = 20W, 3500K, Summit White, 208-277V PC	XTOR3A-N-WT-PC2 = 30W, 3500K, Summit White, 208-277V PC

**LUMENS - CRI / CCT TABLE**

LED Information	XTOR1A	XTOR2A	XTOR2A-N	XTOR3A	XTOR3A-N
Delivered Lumens	719	1361	947	2243	1600
CCT (Kelvin)	5000	5000	3500	5000	3500
Color Rendering Index (CRI)	68	67	86	69	84

**CURRENT DRAW**

	XTOR1A	XTOR2A	XTOR3A
120V	.13A	0.2A	0.3A
208V	--	0.1A	0.15A
240V	--	0.15A	0.15A
277V	--	0.15A	0.15A