




Air Conditioning & Heating

GSH13

1½- To 5-TON SPLIT SYSTEM HEAT PUMPS

13 SEER / R-22

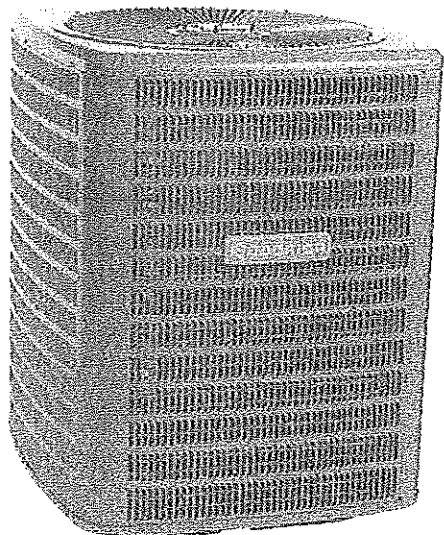

Contents

Nomenclature	2
Product Specifications	3
AHRI Ratings.....	4
Dimensions	5
Wiring Diagrams	6
Accessories	7

Standard Features

- Energy-efficient compressor
- Quiet condenser fan system
- Copper tube/aluminum fin coil
- For use with R-22 refrigerant and charged with inert gas for shipping
- Factory-installed bi-flow liquid line filter drier
- Low-pressure switch
- Time-initiated, temperature-terminated defrost control
- Service valves with sweat connections and easy-access gauge ports
- Contactor with lug connection
- Ground lug connection
- ETL Listed

Cabinet Features

- Louver design sound control top
- Steel louver coil guard
- Heavy-gauge, galvanized-steel cabinet with rust-resistant screws
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.goodmanmfg.com.