

UNIT SUMMARY

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes.

Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

NUMBER OF LINES: 4

TOTAL UNIT QTY: 6


LINE	MARK UNIT	BRAND	ITEM	QTY
1	Unit 1, Unit 2	Marvin	Wood Ultimate Double Hung	2
2	Unit 3	Marvin	Wood Ultimate Double Hung	1
3	Unit 4, Unit 6	Marvin	Wood Ultimate Double Hung	2
4	Unit 5	Marvin	Wood Ultimate Double Hung	1

OLD

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1	Mark Unit: Unit 1, Unit 2			
Qty: 2				

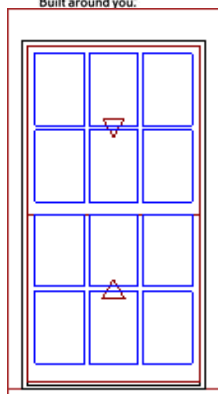

As Viewed From The Exterior

Egress Information

Width: 31 13/16" Height: 26 49/64"

Net Clear Opening: 5.91 SqFt

Performance Information

U-Factor: 0.29

Solar Heat Gain Coefficient: 0.43

Visible Light Transmittance: 0.49

Condensation Resistance: 56

CPD Number: MAR-N-68-03405-00001

ENERGY STAR: N

Performance Grade

Licensee #739

AAMA/WDMA/CSA/101/ I.S.2/A440-08

LC-PG40 899X2059 mm (35.38X81.06 in)

LC-PG40 DP +40/-40


FL15162

Primed Pine Exterior
 Bare Pine Interior
 Back Prime
 Wood Ultimate Double Hung
 Glass Add For All Sash/Panels
 Top Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Bottom Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Non Finger-Jointed Blindstop
 Oil Rubbed Bronze Sash Lock
 1 /Unit Oil Rubbed Bronze Sash Lift
 Beige Jamb Hardware
 Half Screen
 Charcoal Fiberglass Mesh
 Stone White Surround
 4 9/16" Jamb
 *** SHIP TOP CASING LOOSE
 Primed Pine 6" 5/4 Flat Casing - Top
 Primed Pine 2 1/2" 5/4 Flat Casing - Side
 # CASING REVEAL ON TOP 1 15/32" & ON SIDES 1 3/4" PER SKETCH
 Primed Pine Simulated Thick Subsill
 Non Finger-Jointed Subsill
 Non Finger-Jointed Sill
 No Installation Method
 # Non system generated Pricing

Line #2	Mark Unit: Unit 3			
Qty: 1				



Primed Pine Exterior
 Bare Pine Interior
 Back Prime
 Wood Ultimate Double Hung
 Glass Add For All Sash/Panels
 Top Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG

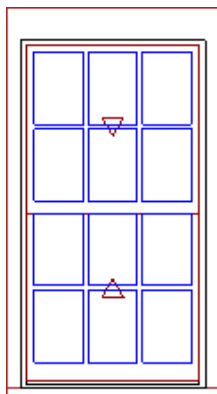

As Viewed From The Exterior

Egress Information

Width: 32 1/16" Height: 26 57/64"
 Net Clear Opening: 5.99 SqFt

Performance Information


U-Factor: 0.29
 Solar Heat Gain Coefficient: 0.43
 Visible Light Transmittance: 0.49
 Condensation Resistance: 56
 CPD Number: MAR-N-68-03405-00001
 ENERGY STAR: N

Performance Grade

Licensee #1109
 AAMA/WDMA/CSA/101/ I.S.2/A440-08
 LC-PG40 1051X2464 mm (41.38X97 in)
 LC-PG40 DP +40/-40
 FL15206

Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Bottom Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Non Finger-Jointed Blindstop
 Oil Rubbed Bronze Sash Lock
 1 /Unit Oil Rubbed Bronze Sash Lift
 Beige Jamb Hardware
 Half Screen
 Charcoal Fiberglass Mesh
 Stone White Surround
 4 9/16" Jamb
 *** SHIP TOP CASING LOOSE
 Primed Pine 6" 5/4 Flat Casing - Top
 Primed Pine 2 1/2" 5/4 Flat Casing - Side
 # CASING REVEALL ON TOP 1 15/32" & ON SIDES 1 3/4" PER SKETCH
 Primed Pine Simulated Thick Subsill
 Non Finger-Jointed Subsill
 Non Finger-Jointed Sill
 No Installation Method
 # Non system generated Pricing

Line #3	Mark Unit: Unit 4, Unit 6			
Qty: 2				

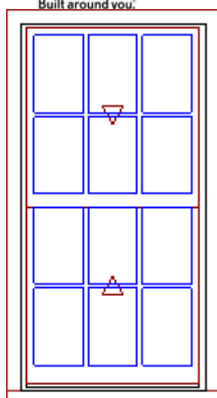

As Viewed From The Exterior

Egress Information

Width: 32 1/16" Height: 28 41/64"
 Net Clear Opening: 6.38 SqFt

Performance Information


U-Factor: 0.29
 Solar Heat Gain Coefficient: 0.43
 Visible Light Transmittance: 0.49
 Condensation Resistance: 56
 CPD Number: MAR-N-68-03405-00001

Primed Pine Exterior
 Bare Pine Interior
 Back Prime
 Wood Ultimate Double Hung
 Glass Add For All Sash/Panels
 Top Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Bottom Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Non Finger-Jointed Blindstop
 Oil Rubbed Bronze Sash Lock

ENERGY STAR: N
Performance Grade
 Licensee #1109
 AAMA/WDMA/CSA/101/ I.S.2/A440-08
 LC-PG40 1051X2464 mm (41.38X97 in)
 LC-PG40 DP +40/-40
 FL15206

1 /Unit Oil Rubbed Bronze Sash Lift
 Beige Jamb Hardware
 Half Screen
 Charcoal Fiberglass Mesh
 Stone White Surround
 4 9/16" Jamb
 Primed Pine 2 1/2" 5/4 Flat Casing
 # CASING REVEAL ON TOP 1 15/32" & ON SIDES 1 3/4" PER SKETCH
 Primed Pine Simulated Thick Subsill
 Non Finger-Jointed Subsill
 Non Finger-Jointed Sill
 No Installation Method
 # Non system generated Pricing

Line #4	Mark Unit: Unit 5			
Qty: 1				

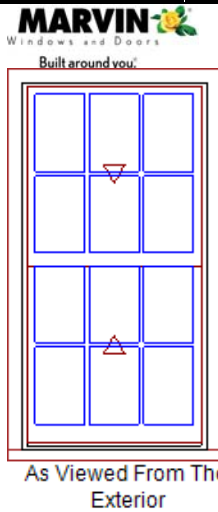

Egress Information
 Width: 32 1/16" Height: 28 37/64"
 Net Clear Opening: 6.36 SqFt
Performance Information
 U-Factor: 0.29
 Solar Heat Gain Coefficient: 0.43
 Visible Light Transmittance: 0.49
 Condensation Resistance: 56
 CPD Number: MAR-N-68-03405-00001
 ENERGY STAR: N
Performance Grade
 Licensee #1109
 AAMA/WDMA/CSA/101/ I.S.2/A440-08
 LC-PG40 1051X2464 mm (41.38X97 in)
 LC-PG40 DP +40/-40
 FL15206

Primed Pine Exterior
 Bare Pine Interior
 Back Prime
 Wood Ultimate Double Hung
 Glass Add For All Sash/Panels
 Top Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Bottom Sash
 Primed Pine Sash Exterior
 Bare Pine Sash Interior
 IG
 Low E1 w/Argon
 Black Perimeter and Spacer Bar
 7/8" SDL - With Spacer Bar - Black
 Rectangular - Special Cut 3W2H
 Primed Pine Ext - Bare Pine Int
 Putty Exterior Glazing Profile
 Ovolo Interior Glazing Profile
 Non Finger-Jointed Blindstop
 Oil Rubbed Bronze Sash Lock
 1 /Unit Oil Rubbed Bronze Sash Lift
 Beige Jamb Hardware
 Half Screen
 Charcoal Fiberglass Mesh
 Stone White Surround
 4 9/16" Jamb
 Primed Pine 2 1/2" 5/4 Flat Casing
 # CASING REVEAL ON TOP 1 15/32" & ON SIDES 1 3/4" PER SKETCH
 Primed Pine Simulated Thick Subsill
 Non Finger-Jointed Subsill
 Non Finger-Jointed Sill
 No Installation Method
 # Non system generated Pricing

Product and Performance Information

NFRC energy ratings and values may vary depending on the exact configuration of glass thickness used on the unit. This data may change over time due to ongoing product changes or updated test results or requirements.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform national rating system for the energy performance of fenestration products, including windows and doors. For additional information regarding this rating system, see www.nfrc.org/WindowRatings.

NFRC energy values and ratings may change over time due to ongoing product changes, updated test results or requirements.

OLD