


SIGN STAR™ STYLE C

PROJECT:	131 Middle St AA
TYPE:	Sign Star - style C
CATALOG NUMBER:	SN LED e22 MFL A9 BLP 12 A/D 30 C
SOURCE:	Fixture will install on 1" OD Alum pipe
NOTES:	

CATALOG NUMBER LOGIC

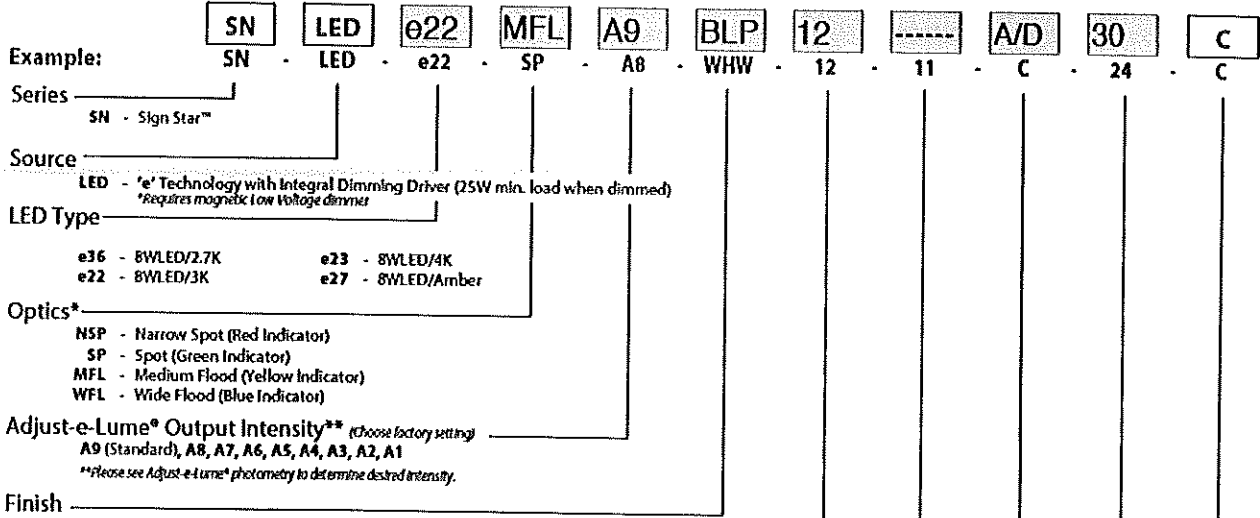

Aluminum Finish			Premium Finish		
Powder Coat Color	Satin	Wrinkle	ABP	CMG	RMG
Bronze	BZP	BZW	Antique Brass Powder	Cascade Mountain Granite	Rocky Mountain Granite
Black	BLP	BLW	Aleutian Mountain Granite	Cracked Ice	Sonoran Desert Sandstone
White (Gloss)	WHP	WHW	Antique White	Cream	Sierra Mountain Granite
Aluminum	SAP	---	Black Chrome	Hunter Green	Textured Forest
Verde	---	VER	Beige	Mojave Desert Sandstone	Weathered Copper
			Brown Patina Powder	Natural Brass Powder	Weathered Iron
			Clear Anodized Powder	Old Copper	Also available in RAL finishes See submittal SUB-1439-03

Lens Type: 12 - Soft Focus Lens, 13 - Rectilinear Lens

Shielding: 11 - Honeycomb Baffle

Cap Style: A - 45°, B - 90°, C - Flush, D - 45° without Weep Hole, E - 90° without Weep Hole, F - 90° cutoff with Flush Lens

Stem Length: (Specify in inches) 18", 24", 30", 36", 42", or 48"

Style: C - Straight Mount

DRIVER DATA	Input Volts	InRush Current	Dimmable	Operation Ambient Temperature
	12VAC/DC 50/60Hz	<1A (non-dimmed)	Magnetic Low Voltage Dimmer	-10°F-130°F

LM79 DATA				L70 DATA		*OPTICAL DATA		
BK No.	CCT (Typ.)	Input Watts (Typ.)	CRI (Typ.)	Minimum Rated Life (hrs.)	70% of initial lumens (L70)	Beam Type	Angle	Visual Indicator
e36	2700K	8.4	90	50,000		Narrow Spot	14°	Red Dot
e22	3100K	8.4	90	50,000		Spot	18°	Green Dot
e23	4100K	8.4	75	50,000		Medium Flood	25°	Yellow Dot
e27	Amber (590nm)	7.9	~	50,000		Wide Flood	36°	Blue Dot

B-K LIGHTING	40429 Brickyard Drive • Madera, CA 93836 • USA	SUBMITTAL DATE	DRAWING NUMBER
	559.438.5800 • FAX 559.438.5900 www.bklighting.com • info@bklighting.com	6-6-14	SUB00097β

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.