

DOOR SCHEDULE

DOOR SCHEDULE ABBREVIATIONS



CLD	CLOSER	HM	HOLLOW METAL	S.C.	SOLID CORE HARDBOARD
DSI	DOOR SILENCERS	INS	INSULATED	S.H.	SPRING HINGE
D.S.	DOOR SWEEP (SOUNDPROOFING)	K	KICKPLATE (PUSH SIDE)	S.L.	SPLIT JAMB (WOOD)
DST	DOOR STOP	KL	KEY LOCK	TEMP	TEMPERED
EHO	ELECTRO HOLD OPENER	MTL	METAL	TL	THUMB LATCH
ES	ELECTRO STRIKE	NO	NUMBER	TK	THICKNESS
F.J.P.	FINGER JOINED PRIMED	PS	PASSAGE SET	UC	UNDERCUT
FR	FIRE RATED	P.H.	FIRE EXIT PANIC HARDWARE (NOTE 4)	WD	WOOD (SOLID)
HA	HANDICAP ACCESSIBLE	P.P.	PUSH PAD/OLE	WG	WIRE GLASS
HC	HOLLOW CORE HARDBOARD	PVS	PRIVACY SET	V	VENNER
HOME	HARDWARE	S.	STEEL	VF	VERIFY IN FIELD

DOORS


MARK	TYPE	SIZE	THK.	F.R.	HDWE SET	MAT.	GLASS		REMARKS	TYPE	MAT.	F.R.	DETAILS		MAT.	THRESHOLD		REMARKS
							SIZE	TYPE					HEAD	JAMB		SILL	HT.	
100	A	3'-0" x 6'-8"	1 3/4"	-	LEVER	WOOD	FULL	TEMPERED SAFETY	HA, KL (NOTE 3), DST [CONFIRM EXISTING GLASS IN DOOR IS TEMPERED SAFETY GLASS]	AA	WOOD	-	EXISTING	EXISTING	EXISTING ALUM	YES	MAX. 1/2"	CONTRACTOR VERIFY EXISTING GLASS IS TEMPERED SAFETY TYPE. CONFIRM MAXIMUM 1/2" EXISTING THRESHOLD HEIGHT. NOTE 3
101	B	3'-0" x 6'-8"	1 3/4"	-	LEVER	WOOD	-	-	HA, PVS, CLD, DST (NOTE 1)	AA	WOOD	-	-	-	-	-	-	PROVIDE ROOM SIGNAGE. SEE DRAWING A7
102	B	2'-8" x 6'-8"	1 3/4"	-	LEVER	WOOD	-	-	PVS, SH, DST (NOTE 1)	AA	WOOD	-	-	-	-	-	-	CONTRACTOR VERIFY ADEQUATE DOOR ROUGH OPENING HEIGHT UNDER NEW STAIR
103	C	3'-0" x 6'-8"	1 3/4"	1 HOUR	LEVER	METAL	-	-	(EXISTING CLASS B LABELED) FR, CLD, DS (NOTE 1)	EXISTING AA	EXISTING WOOD	EXISTING	-	-	-	-	-	PROVIDE CLOSER ON EXISTING FIRE RATED METAL DOOR
104	D	3'-0" x 6'-8"	1 3/4"	-	LEVER	METAL	-	-	(EXISTING) DST	EXISTING AA	EXISTING WOOD	EXISTING	-	-	-	-	-	EXISTING EXTERIOR METAL DOOR (VF)
200	E	2'-8" x 6'-8"	1 3/4"	-	LEVER	WOOD	-	-	(EXISTING) DST	EXISTING AA	EXISTING WOOD	-	-	-	-	-	-	EXISTING KITCHEN WOOD PANEL DOOR (VF)

NOTES

- SPECIFIC SELECTION OF DOOR TYPES, THICKNESS, VENNER, HINGES, LEVER HANDLES, PANIC BARS OR PADS, WOOD TRIM AND OTHER RELATED DOOR HARDWARE BY OWNER/CC. (MAINTAIN FIRE RATINGS REQUIRED FOR DOORS AND FRAMES INDICATED IN THIS SCHEDULE. (11))
- ALL DOORS SHALL BE EQUIPPED WITH LEVER TYPE HANDLES (UN) AND SHALL BE ADA COMPLIANT. OPERABLE PARTS SHALL BE 3/4" MIN. TO 48" MAX. ABOVE FINISHED FLOOR AND OPERATE WITH ONE HAND AND SHALL NOT REQUIRE TIGHT GRASPING, FINCHING, OR TWISTING OF THE WRIST. THE FORCE REQUIRED TO ACTIVATE OPERABLE PARTS SHALL BE 5 POUNDS (22.2N) MAXIMUM.
 - DOOR CLOSERS SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS, MINIMUM.
- APPROVED KEY OPERATED LOCKING DEVICE IS PERMITTED.
 - WHERE LOCKING DEVICE IS REMOVELY DISTINGUISHABLE AS LOCKED.
 - A READABLE VISIBLE SIGN IS POSTED ON THE EXPOSED SIDE OR ADJACENT TO THE DOOR STAYING THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED.
 - LETTERS SHALL BE MINIMUM 1/8" HIGH ON CONTRASTING BACKGROUND.
 - SIZE OF THE KEY OPERATED LOCKING DEVICE SHALL BE APPROVED BY AND IS APPROVABLE BY THE BUILDING OFFICIAL FOR DUE CAUSE.

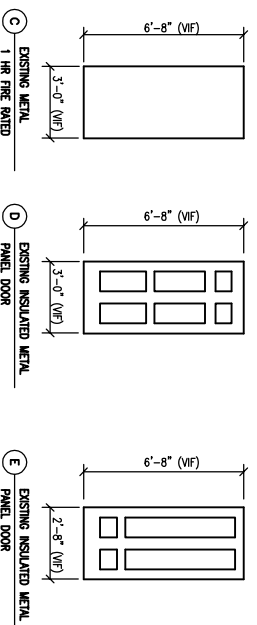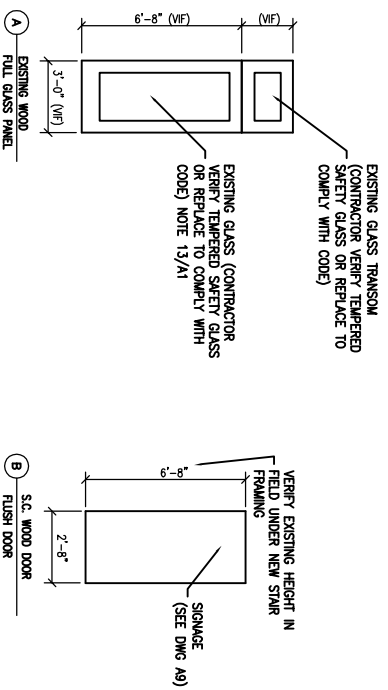

DOOR TYPES




FRAME TYPES

4. See Drawing A1 for General Notes


NOTES

JOHN H. LEASURE ARCHITECT, INC.
6 Q STREET
SOUTH PORTLAND, MAINE 04106



A10

REV.	DATE	STATUS
2	04-18	PERMIT SUBMISSION
2	12-18	PERMIT RESUBMISSION



PROPOSED SICHUAN KITCHEN - RESTAURANT
612 CONGRESS STREET
PORTLAND, MAINE

DOOR SCHEDULE