

# Gas Fireplaces



P36 - P36D Gas Fireplace



## P36 - P36D Zero Clearance Direct Vent Gas Fireplace

Model	P36-NG4	P36-LP4	P36D-NG1	P36D-LP1
Fuel Type	Natural Gas	Propane	Natural Gas	Propane
Minimum Supply Pressure	5" W.C. (1.25 kPa)	12" W.C. (3.00 kPa)	5" W.C. (1.25 kPa)	12" W.C. (3.00 kPa)
Manifold Pressure - High	3.8" W.C. (0.95 kPa)	11" W.C. (2.74 kPa)	3.8" W.C. (0.95 kPa)	11" W.C. (2.74 kPa)
Manifold Pressure - Low	1.1" W.C. (0.27 kPa)	2.9" W.C. (0.72 kPa)	1.1" W.C. (0.27 kPa)	2.9" W.C. (0.72 kPa)
Orifice Size	#37 DMS	#52 DMS	#37 DMS	#52 DMS
Minimum Input	15,500 BTU/h (4.54 kW)	15,000 BTU/h (3.96 kW)	15,500 BTU/h (4.54 kW)	15,000 BTU/h (3.96 kW)
Maximum Input	30,000 BTU/h (8.79 kW)	30,000 BTU/h (8.79 kW)	30,000 BTU/h (8.79 kW)	30,000 BTU/h (8.79 kW)
Vent Sizing	4" Inner / 6 5/8" Outer	4" Inner / 6 5/8" Outer	4" Inner / 6 5/8" Outer	4" Inner / 6 5/8" Outer

Approved Venting Systems	
Flex Vent Systems:	FPI AstroCap™ Flex Vent
Rigid Pipe Vent Systems:	Simpson Dura-Vent® Direct Vent GS American Metal Products Ameri Vent Security Secure Vent® Selkirk Direct-Temp.



Gas Fireplaces

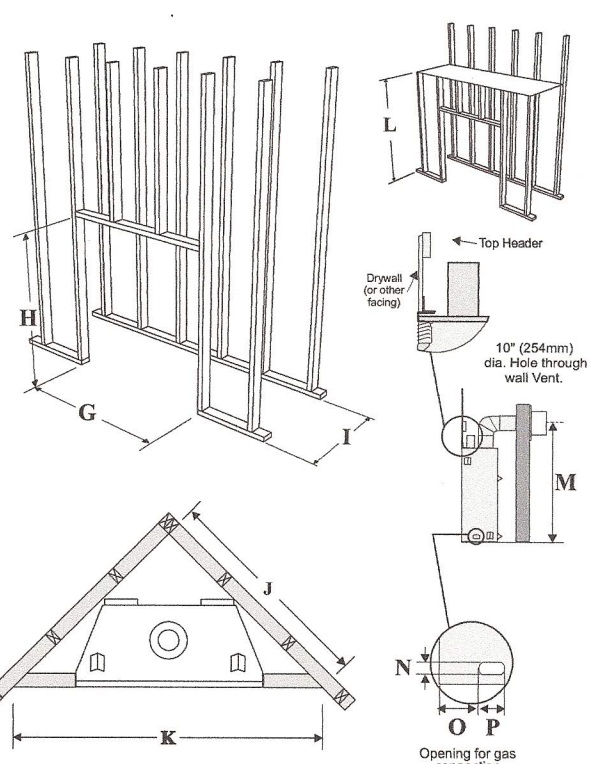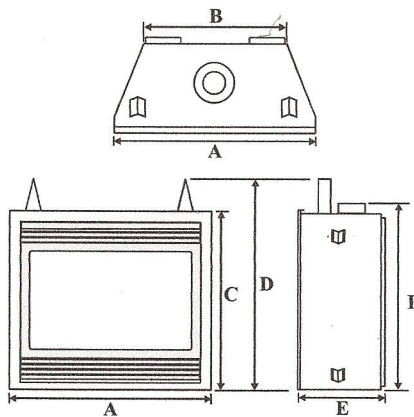

Unit Dimensions	Description	P36	P36D
A	Front Face Width	36" (914mm)	36" (914mm)
B	Rear Firebox Width	33-1/4" (838mm)	33-1/4" (838mm)
C	Front Face Height	30-1/2" (775mm)	30-1/2" (775mm)
D	Height w/ Standoff	36" (914mm)	37" (940mm)
E	Unit Depth	12-3/4" (324mm)	17-1/8" (435mm)
F	Height to Vent	32-1/2" (826mm)	32-1/2" (826mm)
Framing Dimensions	Description	P36	P36D
G	Framing Width*	36-1/4" (921mm)	36-1/4" (921mm)
H***	Framing Height* ***	36-1/4" (921mm)***	37-1/4" (946mm)***
I	Framing Depth*	12-3/4" (324mm)	17-1/8" (435mm)
J	Corner Wall Length	42-7/16" (1078mm)	48" (1219mm)
K	Corner Facing Wall Width	60" (1524mm)	68" (1727mm)
L	Framed Chase Ceiling	46" (1168mm)	46-1/2" (1181mm)
M	Vent Centerline Height	40-1/2" (1029mm)	40-1/2" (1029mm)
N	Gas Connection Height	2" (51mm)	2" (51mm)
O	Gas Connection Inset	3-1/2" (89mm)	3-1/2" (89mm)
P	Gas Connection Width	4" (102mm)	4" (102mm)

**\*If using the Barcelona Surround, Kensington, Balmoral, or Tripoli Screen Door please note that framing and facing must be non combustible (12" on top and 6" on both sides) and that the Barcelona is only approved for installation with a single sidewall.**

**Please refer to Page 11 (Exterior Vent Terminations) for additional guidelines on vent locations.**

**\*\*\*Important: Framing height requires consideration of the hearth depth. Dimension H = H + the thickness of installed hearth.**