
HEMMED EDGE OF PAN FLASHING WEEP SPACE (NO SEALANT)

HEMMED DRIP LIP ON PAN FLASHING

SEALANT

WINDOW HEAD RECEPTOR SET IN SEALANT

WINDOW FRAME

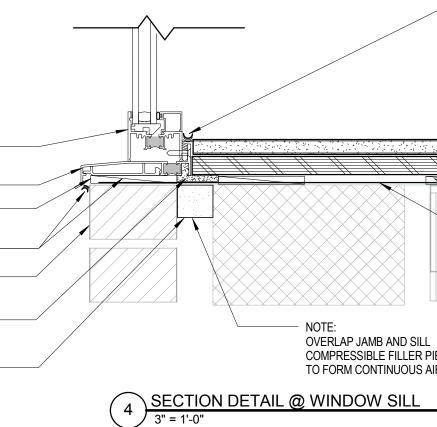

WINDOW FRAME SEAL ENDS OF SILL EXTRUSION PROIR TO INSTALLATION SOLID PLASTIC SHIMS SEALANT AT EXPOSED EDGE & IN SHIM SPACE BELOW SILL EXTRUSION EX'G BRICK VENEER


> LOW EXPANSION SPRAY FOAM AS AIR SEAL IN SHIM SPACE


> > COMPRESSIBLE JOINT FILLER


MOISTURE RESISTANT GWB, FINISHED & PAINTED PRESSURE TREATED PLYWOOD BACKER SELF-ADHESIVE FLEXIBLE FLASHING COMPRESSIBLE JOINT FILLER STRAP ANCHOR SEALANT · WINDOW FRAME

JAMB RECEPTOR LOW EXPANSION SPRAY FOAM AS AIR SEAL IN SHIM SPACE SEALANT REVEAL AT EX'G BRICK



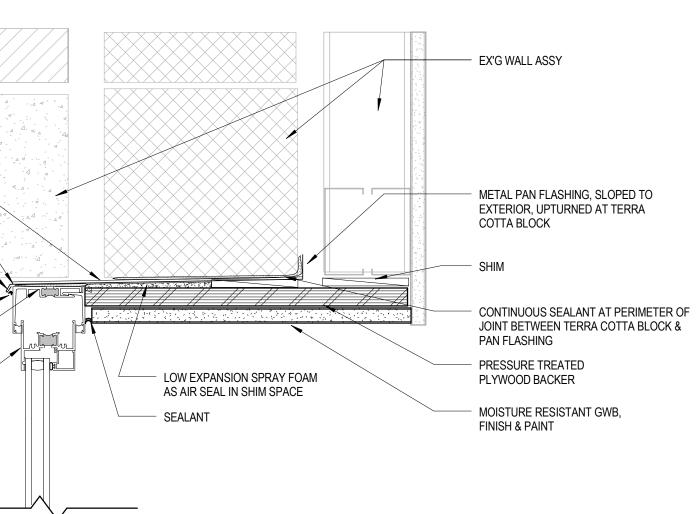

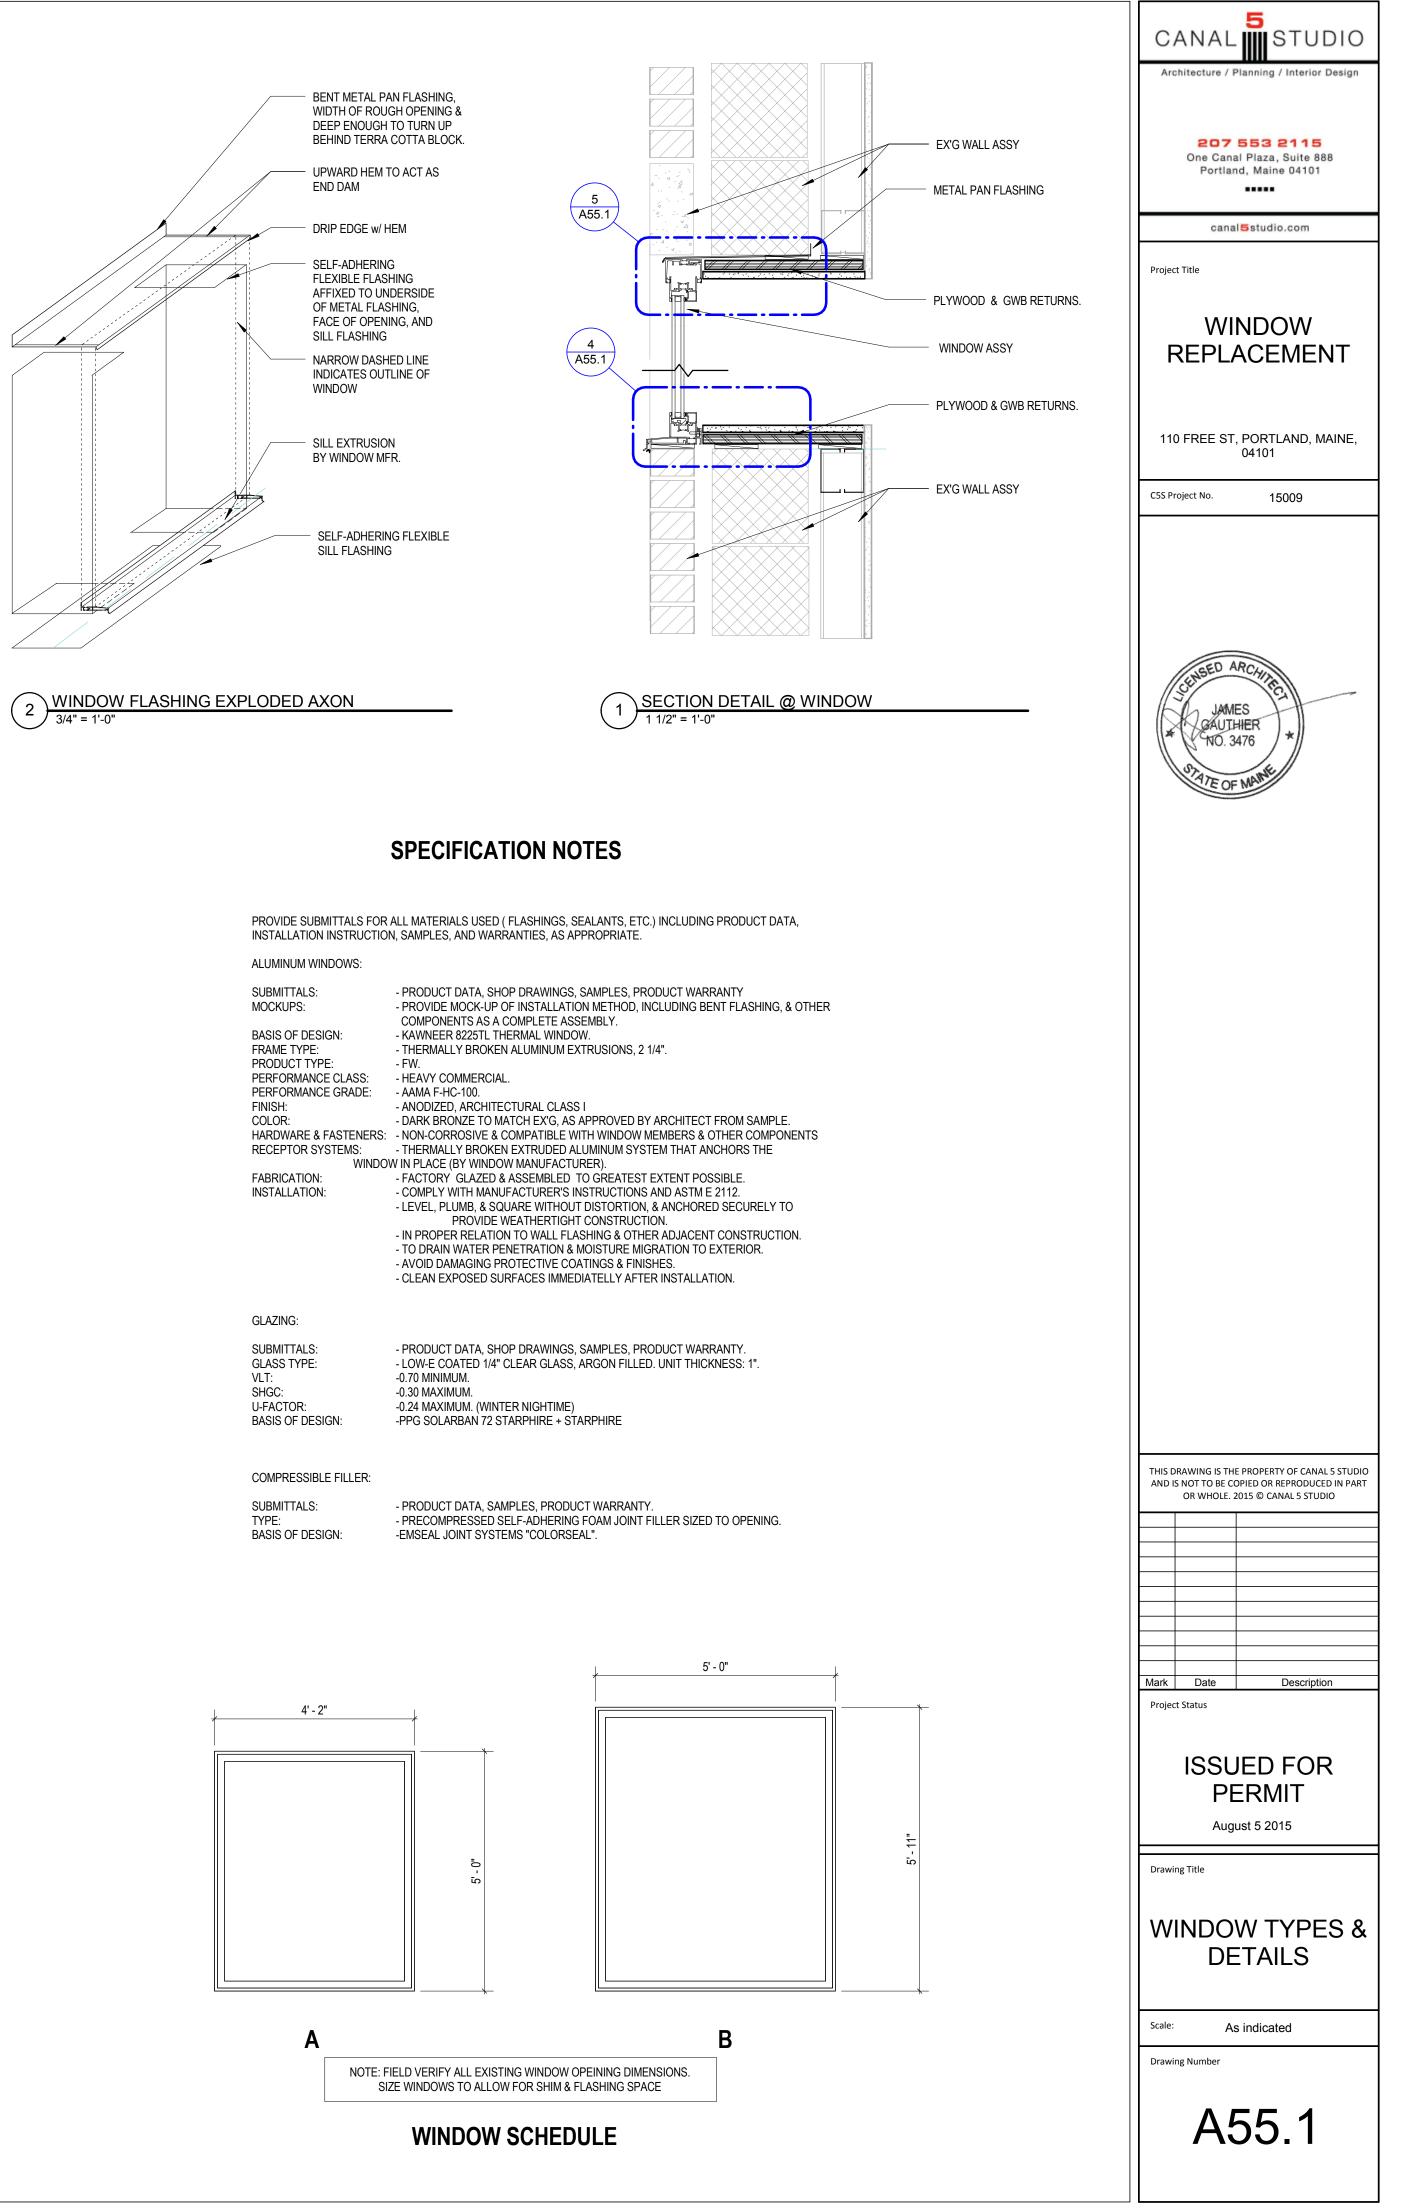

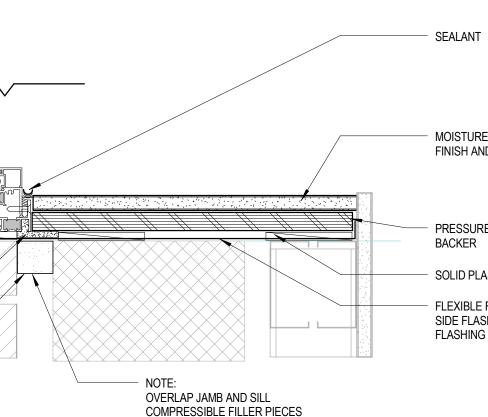

TO FORM CONTINUOUS AIR SEAL

SECTION DETAIL @ WINDOW HEAD

SEALANT

MOISTURE RESISTANT GWB, FINISH AND PAINT

PRESSURE TREATED PLYWOOD

SOLID PLASTIC SHIMS

FLEXIBLE FLASHING AT SILL. SIDE FLASHING LAPS OVER SILL FLASHING

PLAN DETAIL @ WINDOW JAMB