PK#

1997

Project Name: Todd.nugent@store.lowes.com

1.IM

Line# Location:

Attributes

Architect, Double Hung, 24.25 X 80.25

Architect, Double Hung, 24.25 X 80.25

1: Non-Standard SizeNon-Standard Size Double Hung, Equal

Viewed From Exterior

Rough Opening 25" X 81"

Frame Size: 24 1/4 X 80 1/4

General Information: Standard, Luxury, Wood, Pine, 4 3/8", 4 3/16"

Exterior Color / Finish: Primed, Primed Wood
Interior Color / Finish: Prefinished White Interior
Sash / Panel: Putty Glaze, Ogee, Standard, No Sash Lugs
Glass: Insulated Dual Clear Air Filled Non High Altitude

Hardware Options: Cam-Action Lock, White, No Limited Opening Hardware, No Sash Lift, No Integrated Sensor

Screen: Half Screen, Standard EnduraClad, White, Standard, InView™

Performance Information: U-Factor 0.45, SHGC 0.60, VLT 0.62, CPD PEL-N-234-00217-00001, Performance Class CW, PG 40, Calculated Positive DP


Quote Number: 9558803

Rating 40, Calculated Negative DP Rating 40, Year Rated 08|11, Egress Meets Typical for ground floor 5.0 sqft (E1) (United States Only)

Grille: No Grille,

Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 209".

Customer Notes: BAY WINDOWS - NO GRILLES

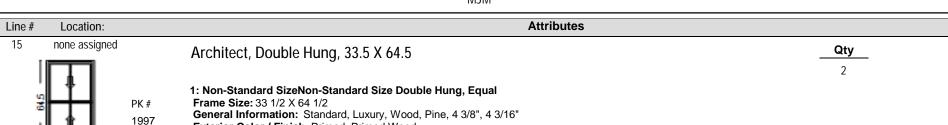

Viewed From Exterior Rough Opening: 34 - 1/4" X 65 - 1/4" Exterior Color / Finish: Primed, Primed Wood Interior Color / Finish: Prefinished White Interior Sash / Panel: Putty Glaze, Ogee, Standard, No Sash Lugs Glass: Insulated Dual Clear Air Filled Non High Altitude

Hardware Options: Cam-Action Lock, White, No Limited Opening Hardware, No Sash Lift, No Integrated Sensor


Screen: Half Screen. Standard EnduraClad. White. Standard. InView™

Performance Information: U-Factor 0.45, SHGC 0.54, VLT 0.56, CPD PEL-N-234-00219-00001, Performance Class CW, PG 45, Calculated Positive DP

Rating 45, Calculated Negative DP Rating 45, Year Rated 08|11, Egress Meets Typical 5.7 sqft (E) (United States Only)


Grille: ILT, No Custom Grille, 7/8", Traditional (2W1H / 2W1H), Putty Glaze, Ogee

Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 196".

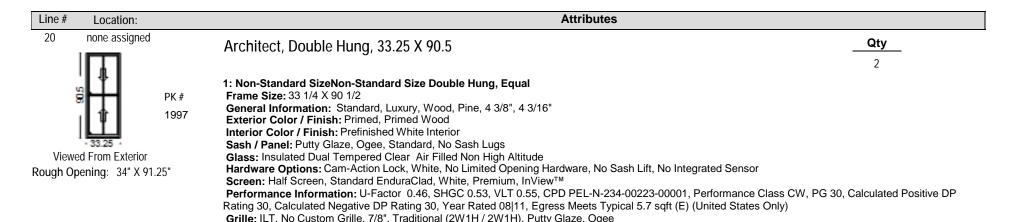

Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 248".

Customer Notes: QUOTED BOTH SASHES AS TEMPERED - BOTTOM ONLY WILL NEED TO BE SENT TO CUSTOM SOLUTIONS

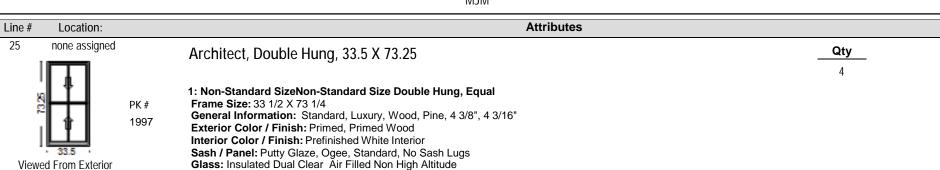

Rough Opening: 34 - 1/4" X 74"

Hardware Options: Cam-Action Lock, White, No Limited Opening Hardware, No Sash Lift, No Integrated Sensor


Screen: Half Screen, Standard EnduraClad, White, Standard, InView™

Performance Information: U-Factor 0.45, SHGC 0.54, VLT 0.56, CPD PEL-N-234-00219-00001, Performance Class CW, PG 45, Calculated Positive DP


Rating 45, Calculated Negative DP Rating 45, Year Rated 08|11, Egress Meets Typical 5.7 sqft (E) (United States Only)

Grille: ILT, No Custom Grille, 7/8", Traditional (2W1H / 2W1H), Putty Glaze, Ogee


Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 214".

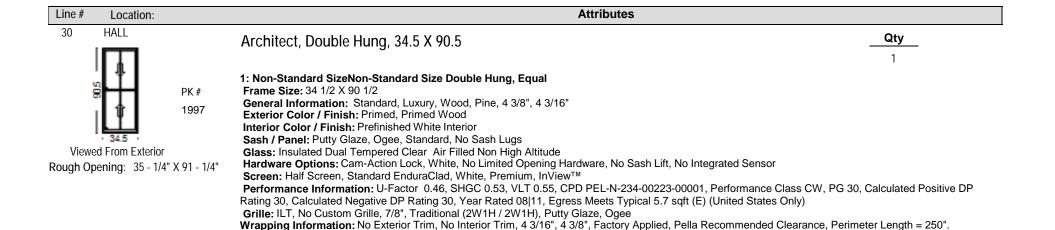

Customer Notes: OUOTED BOTH SASHES AS TEMPERED - BOTTOM ONLY WILL NEED TO BE SENT TO CUSTOM SOLUTIONS

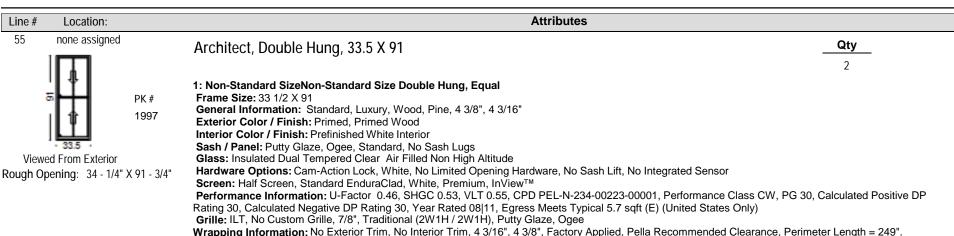

Customer Notes: QUOTED BOTH SASHES AS TEMPERED - BOTTOM ONLY WILL NEED TO BE SENT TO CUSTOM SOLUTIONS

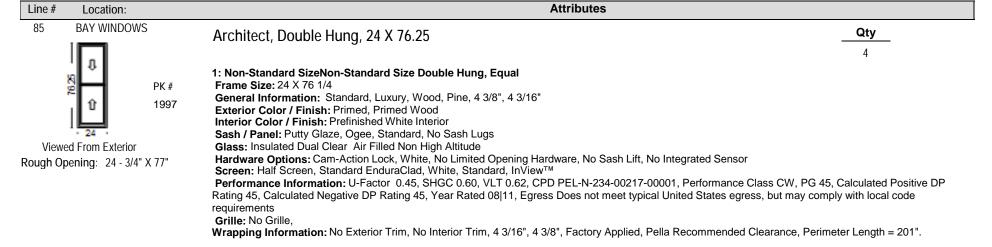

Customer Notes: BAY WINDOWS - NO GRILLES

Quote Number: 9558803

Qty



Viewed From Exterior Rough Opening: 34 - 1/4" X 53 - 1/4"

Hardware Options: Cam-Action Lock, White, No Limited Opening Hardware, No Sash Lift, No Integrated Sensor

Screen: Half Screen, Standard EnduraClad, White, Standard, InView™


Glass: Insulated Dual Clear Air Filled Non High Altitude

Performance Information: U-Factor 0.45, SHGC 0.54, VLT 0.56, CPD PEL-N-234-00219-00001, Performance Class CW, PG 45, Calculated Positive DP Rating 45, Calculated Negative DP Rating 45, Year Rated 08|11, Egress Does not meet typical United States egress, but may comply with local code

requirements

Grille: ILT, No Custom Grille, 7/8", Traditional (2W1H / 2W1H), Putty Glaze, Ogee

Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 172".



PK# 1997

Viewed From Exterior Rough Opening: 34 - 1/4" X 53 - 1/4"

Frame Size: 33 1/2 X 52 1/2

General Information: Standard, Luxury, Wood, Pine, 4 3/8", 4 3/16"

Exterior Color / Finish: Primed, Primed Wood Interior Color / Finish: Prefinished White Interior

Sash / Panel: Putty Glaze, Ogee, Standard, No Sash Lugs Glass: Insulated Dual Tempered Clear Air Filled Non High Altitude

Hardware Options: Cam-Action Lock, White, No Limited Opening Hardware, No Sash Lift, No Integrated Sensor

Screen: Half Screen, Standard EnduraClad, White, Standard, InView™

Performance Information: U-Factor 0.46, SHGC 0.53, VLT 0.55, CPD PEL-N-234-00223-00001, Performance Class CW, PG 45, Calculated Positive DP Rating 45, Calculated Negative DP Rating 45, Year Rated 08|11, Egress Does not meet typical United States egress, but may comply with local code requirements


Grille: ILT, No Custom Grille, 7/8", Traditional (2W1H / 2W1H), Putty Glaze, Ogee

Wrapping Information: No Exterior Trim, No Interior Trim, 4 3/16", 4 3/8", Factory Applied, Pella Recommended Clearance, Perimeter Length = 172".

Customer: LOWE'S COMPANIES INC. - 01946 Project Name: <u>Todd.nugent@store.lowes.com</u> Quote Number: 9558803

MJM

| Line # | Location:     | Attributes                             |     |
|--------|---------------|--|-----|
| 100    | None Assigned | 00NL0000 - 6" Installation Clips (100) | Qty |
|        |               | ·                                      | 8   |

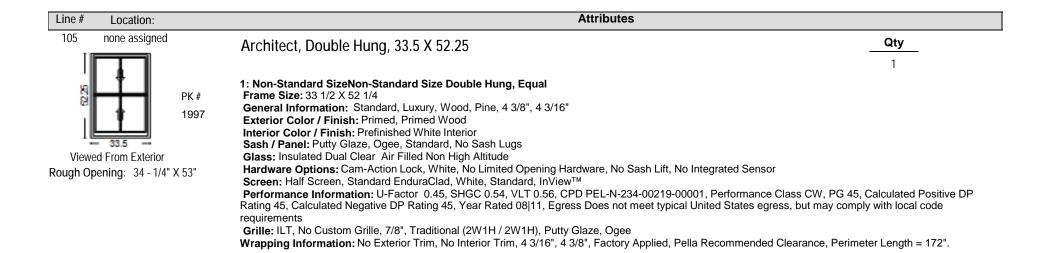

## Thank You For Your Interest In Pella® Products