


The flue tiles will continue to be connected with Heat Stop II. At the first and second floors the chimney will be surrounded (on the three sides facing the wood flooring and structure) with fire-shield metal plate. We will continue to maintain a distance of two inches or more between the chimney and any flammable material. [The fourth side of the chimney is flush with the outer brick wall, as you can see.] Incidentally, we will be building an inner wall of brick as we go. The area of the chimney probably once had some sort of stove, and it had a smoke hole. The area next to this new chimney has only one layer of outer wall brick. The exterior walls of the main body of the house are two layers of brick.

Enclosed please find:

General Building Permit Application
Installation Standards (With just a check mark next to "masonry chimney"),
Electronic Signature and Fee Payment Confirmation,
Chimney Or Fireplace Construction/Installation Disclosure,
Residential Additions/Alterations Permit Application & Checklist,
Plot plan showing location of this chimney (This is a four chimney house.),
My own elevation drawing,
Whatever photos I can have ready for you, and
My check made out to the City of Portland in the amount of \$100.00.

Thank you for your attention and cooperation.

Sincerely yours,

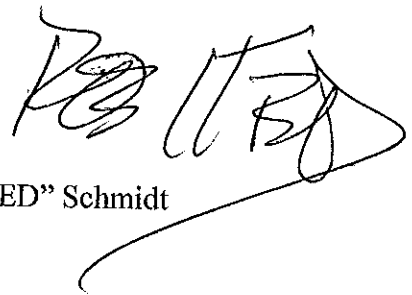

Remington O. "TED" Schmidt