



H:\16068\Dwg8\CD\ACAD\_7641\_05\_M5-0.dwg, M5-0, 5/20/2016 4:07:07 PM, 1:1

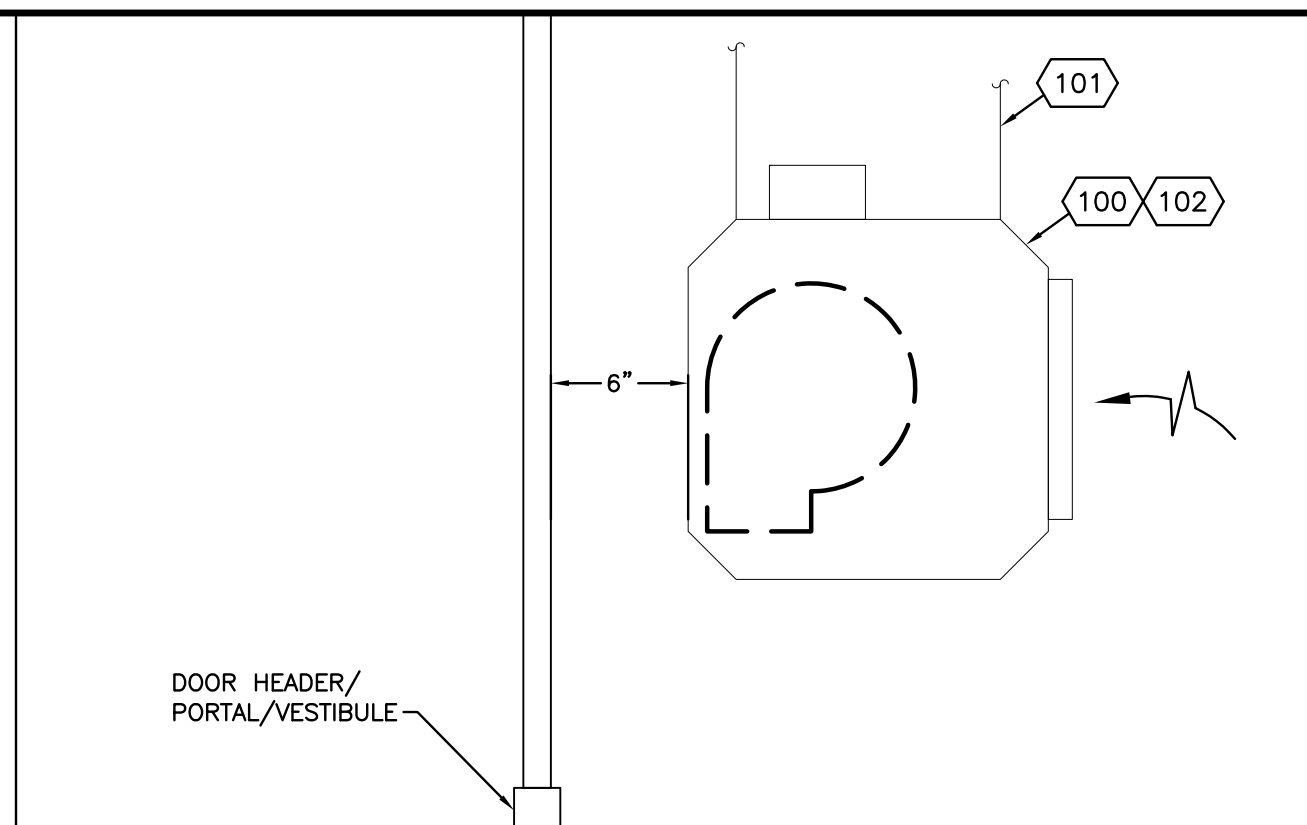


**CODED NOTES**

- 100 HEATED AIR CURTAIN. SEE AIR CURTAIN SCHEDULE FOR ADDITIONAL INFORMATION.
- 101 SUSPEND FROM STRUCTURE ABOVE. 3/8", 16 ALL THREAD ROD AND KINETICS NOISE SRH-1 SPRING VIBRATION ISOLATORS.
- 102 INSTALL BOTTOM AT 10'-0" AFF. COORDINATE INSTALLATION WITH EAS EQUIPMENT, TRAFFIC COUNTER EQUIPMENT, EXIT LIGHT, AND LIGHTS.

**HEATING AIR CURTAIN DETAIL** NOT TO SCALE 301

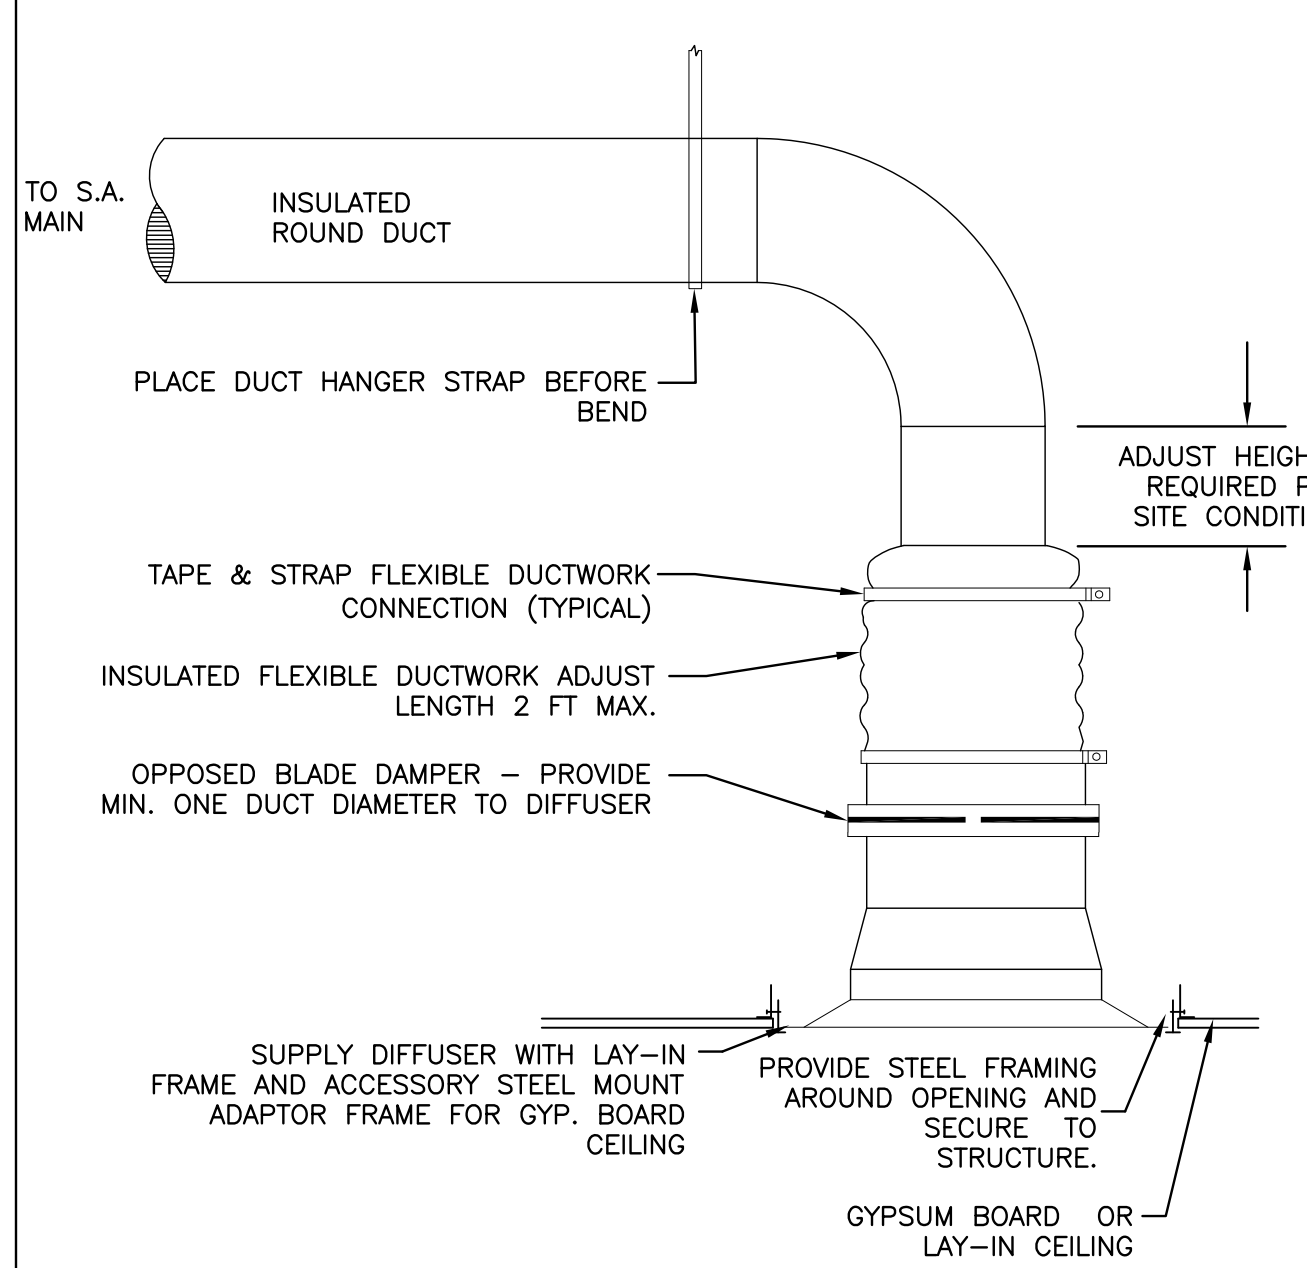

**DIFFUSER MOUNTING DETAIL** NOT TO SCALE 103

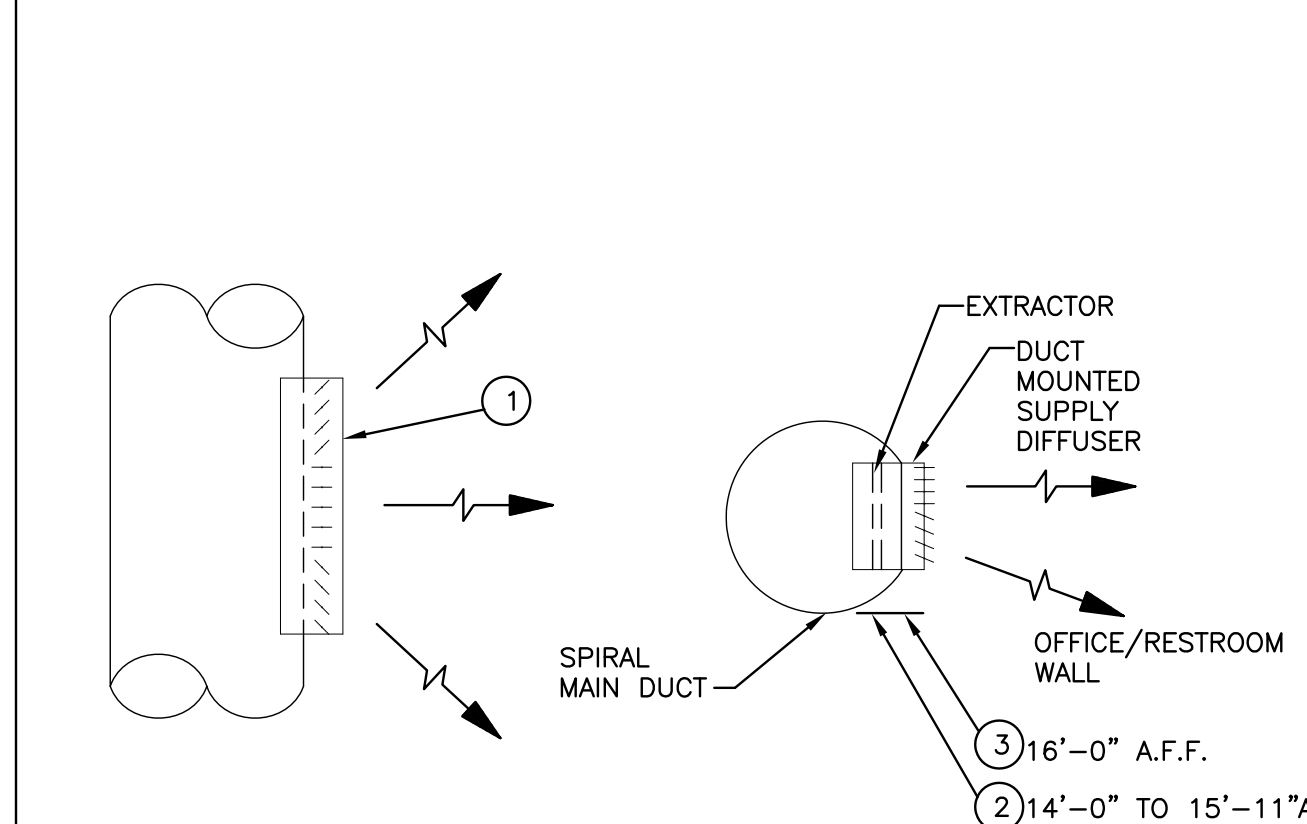

- PLAN**
- 1 ADJUST THROW OF VERTICAL BLADES FOR 1/3 OF AIR STRAIGHT AND 1/3 OF AIR TO 45 DEGREES RIGHT AND 1/3 OF AIR TO 45 DEGREES LEFT.
- SECTION**
- 2 FOR SUPPLY REGISTERS 14'-0" TO 15'-11", ADJUST THROW OF HORIZONTAL BLADES FOR 2/3 OF AIR STRAIGHT AND 1/3 OF AIR TO 22.5 DEGREES DOWN.
  - 3 FOR SUPPLY REGISTERS 16'-0" & HIGHER, ADJUST THROW OF HORIZONTAL BLADES FOR 1/2 OF AIR STRAIGHT AND 1/2 OF AIR TO 22.5 DEGREES DOWN.

**DUCT MOUNTED REGISTER DETAIL** NOT TO SCALE 101

NEW STORE



GAP INC.  
CORPORATE ARCHITECTURE  
1 HARRISON STREET  
SAN FRANCISCO, CA 94105

STORE NO.: 7641

STORE NAME:  
PORTLAND

STORE LOCATION:  
152 MIDDLE STREET  
PORTLAND, ME 04101


PROJ. I.D.: 0000053405

PROTOTYPE DATE: 09/4/15  
PROTOTYPE VERSION 4.1

CONSULTANT INFO:



PROFESSIONAL STAMP:

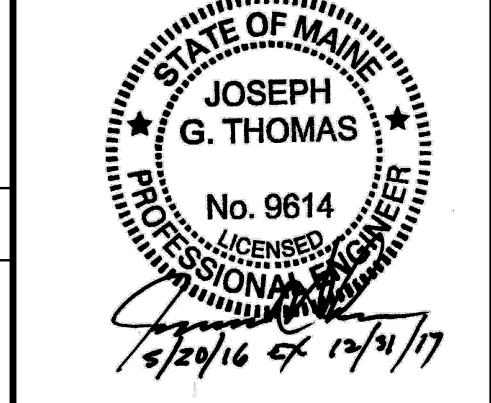

ARCHITECT INFO:



HEREBY CERTIFY THAT THESE PLANS HAVE BEEN PREPARED BY MY OFFICE AND UNDER MY SUPERVISION AND THAT TO THE BEST OF MY KNOWLEDGE, THEY COMPLY WITH ALL LAWS, RULES, REGULATIONS AND ORDINANCES OF PORTLAND, ME RELATING TO STRUCTURES AND BUILDINGS.

ISSUE TYPE:  
100% CD CHECKSET 5/20/16  
PERMIT / BID  
LL APPROVAL

DRAWN BY: DG  
A&E JOB NO.: 16-5433

SHEET TITLE:  
MECHANICAL DETAILS

SHEET NUMBER:

M5-0