Location of Construction:	Owner:		Phone:		Permit No: 9 0	000	
Owner Address:	Leasee/Buyer's Name:	Phone:	BusinessName:		DEDMIT	SSUED	
	Pleasant Experience	52 Pleasant St	Portland,)	E 04101		SSULD	
Contractor Name:	Address:	Phone:	767-3356 7	72-7371	Permit Issued:	5 1000	
ast Use:	Proposed Use:	COST OF WORK	S: PERM	HT FEE: 25.00	JUN 2	0 1990	
Retull	Hair Salon	FIRE DEPT. A	Approved INSPE Denied Use G	CTION:	CITY OF PO	ORTLAN	
		Signature:	Signat	009311	2011e: CBL: 040	-1-004	
Proposed Project Description:		PEDESTRIAN ACTIVITIES DISTRICT (P/CD.)			Zoning Approval:	1/1/9	
			approved		Special Zone of	r Reviews:	
Change Use		Approved with Conditions:			☐ Shoreland		
7			Denied		□ Wetland		
		Cimentura	irs	ing.	☐ Flood Zone ☐ Subdivision	10	
Domis Talena Deu	Data Applied Form	Signature:	L	ate:	☐ Site Plan maj☐	minar 🖂 mm 🗀	
Permit Taken By:	Date Applied For:	June 1996					
					Zoning Ap	opeal	
 This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules. Building permits do not include plumbing, septic or electrical work. 						☐ Variance☐ Miscellaneous☐ Conditional Use	
tion may invalidate a building permi		suance. Taise informa-	12 Pa		☐ Approved		
tion may invalidate a building permi	and stop an work.		72,65	4	☐ Denied		
			20	417			
		Lan	0.	1,50	Historic Pres		
		2/2	EA.	PACE	□ Not in District or□ Does Not Requi		
		")	90017	40	☐ Requires Review		
			CO1, 50.	W		•	
			ERINIT ISSUED	.20	Action:		
	CERTIFICATION		Sy		☐ Appoved		
I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been						Conditions	
authorized by the owner to make this app	lication as his authorized agent and I agree to co	onform to all applicable	laws of this jurisd	iction. In addition,	☐ Denied		
	ication issued, I certify that the code official's			thority to enter all	Date:		
areas covered by such permit at any reason	mable hour to enforce the provisions of the cod	e(s) applicable to such p	permit		Date.		
1							
Harne Esso	Human war of the Unite	- 10 June 1996	71170	560			
FIGNATURE OF APPLICANT Jeann	ADDRESS:	DATE:	PHON			1 1	
					1		
RESPONSIBLE PERSON IN CHARGE C	F WORK, TITLE		PHON	E:	CEO DISTRICT	7	
	/hite-Permit Desk Green-Assessor's Can	2200	dia Eda Grando	and to a section		A. marine	

BUILDING PERMIT REPORT					
DATE: 17 June 196 ADDRESS: 52 PLeasant SY					
REASON FOR PERMIT: Change of USe					
BUILDING OWNER: Denis Foley					
CONTRACTOR: APPROVED: *					
PERMIT APPLICANT: DENIED:					
	CONDITION OF APPROVAL OF	R DEMIAL			
De ^r obt	fore concrete for foundation is placed, welcoment Review Coordinator and Inspect tained. (A 24 hour notice is required p	tion Services must be prior to inspection)			
3. It for	ecaution must be taken to protect concre is strongly recommended that a register undation forms before concrete is placed at the proper setbacks are maintained.	red land surveyor check all			
4. All	l vertical openings shall be enclosed wi ting of at least one(1) hour, including				
5. Eac app dir	ch apartment shall have access to two(2) proved means of egress. A single exit i rectly from the apartment to the buildin munications to other apartment units.	separate, remote and sacceptable when it exits			
6. The con aut spr cap of sha the be	boiler shall be protected by enclosing instruction including fire doors and ceil tomatic extinguishment. Sprinkler piping rinklers may be connected to a domestic pacity sufficient to provide 0.15 gallong floor throughout the entire area. An I all be installed in an accessible location connection to the domestic water supply 3/4 inch copper or 1 inch steel. Maximus sidential sprinkler is 144 sq. feet per	ing, or by providing ng serving not more than six water supply having a ns per minute, per square foot NDICATING shut-off valve on between the sprinkler and y. Minimum pipe size shall num coverage area of a			
7. Eve and app from sep reseable shall (61)	ery sleeping room below the fourth story is I-1 shall have at least one operable worked for emergency egress or rescue. In the inside without the use of special parate tools. Where windows are provide some they shall have a sill height not ove the floor. All egress or rescue windled the aminimum net clear opening height not the floor. The minimum net clear opening withes (508 mm), and a minimum net clear opening withes (508 mm), and a minimum net clear opening withes (508 mm), and a minimum net clear opening withes (508 mm), and a minimum net clear opening with the mini	in buildings of Use Groups R window or exterior door. The units must be operable knowledge or as means of egress or more than 44 inches (1118mm) adows from sleeping rooms ght dimension of 24 inches dth dimension shall be 20 opening of 5.7 sq. feet.			
8. Ap	ortable fire extinguisher shall be $l\infty a$	ated as per NFPA #10. They			
9. All typ	all bear the label of an approved agency single and multiple station smoke determined shall be installed in accordance by's building code Chapter 9, section 19	ectors shall be of an approved with the provisions of the			

Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors

shall be installed and maintained at the following locations):


- 1. In the immediate vicinity of bedrooms
- 2. In all bedrooms
- 3. In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.
- 10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1993)
- 11. Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
- 12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1993)
 - 13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and - 8-1/4" maximum rise. All other Use Group minimum 11" tread, -7"-maximum rise.
 - 14. Eeadroom in habitable space is a minimum of 7'6".
 - 15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 - All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
 - Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
 - The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

This permit coes not excuse the applicant from obtaining any license which way be needed from the City Clerk's Office.

P. Samuel Hoffses, Chief of Inspection Services

/ef 3/16/95

CiCiLI. McDongal. P.F.

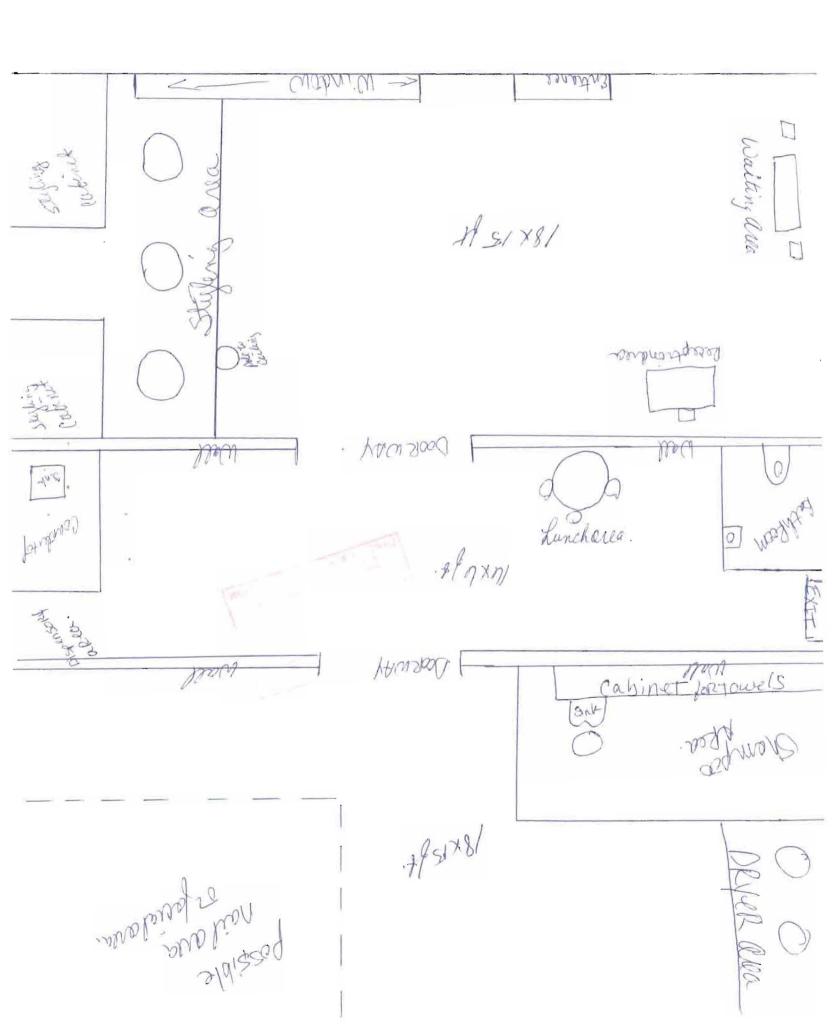

CITY OF PORTLAND, MAINE

Dept. of Planning & Urban Development
City Hall
389 Congress Street
Portland, Maine 04101

FACSIMILE MESSAGE COVER SHEET Return Fax # (207) 874-8716

Date: June 25, 1996 Time: 9-10 mm

WART To the Attention of: Foley Bros

Company/Entity:

Message From: Mike Collins

Department: Elec. Insp Phone #: 874-8694

Receiving FAX #: 774 - 1921

Total # of Pages including cover sheet: 2

Message: 52 Pleasant St. (772-7321)

(H) 774-1921 (O) 775-16 43 TO: FOLEY BROTHERS

Fax # 774-1921

FROM: MICHAEL COLLINS, CHIEF ELEC INSP, CITY OF PORTLAND

RE: 52 PLEASANT ST./PLEASANT EXPERIENCE VIOLATIONS/CORRECTIONS

1st FLOOR

- BATHROOM NEEDS EXHAUST FAN
- BLANK OFF OUTLETS OVER ELECTRIC HEATERS (6) TOTAL
- SMOKE DETECTORS NEEDED AS PER FIRE DEPARTMENT, LT. MCDOUGALL

STAIRWAY TO BASEMENT

- SWITCH PLATE MISSING TO THREE GANG BOX
- RUBBER CORD GOING THROUGH WALL, REMOVE/REFEED
- TWO EXTENSION CORDS HANGING, REMOVE/REFEED
- SERVICE CABLE NOT SUPPORTED

BASEMENT

- PANELS NOT LABELED/SEALED
- DISCONNECTS NOT LABELED/SEALED
- PANEL OUTLET NOT GFCI PROTECTED
- SERVICES NOT GROUNDED TO WATER PIPE
- UNSUPPORTED ROMEX AND SERVICE CABLES
- LABEL TIMER SWITCH
- WATER HEATER PANELS MISSING
- CLEAN AREA 3 FEET MINIMUM FROM PANELS