


AT UNDERSIDE OF 6TH FLOOR STRUCTURE (IN ADDITION TO CEILING TYPES SHOWN) PROVIDE (1) LAYER OF 1/2" 440 SOUND BARRIER BY HOMASOTE OR EQUAL ON 25 GA 7/8" FURRING CHANNELS AT 24" O.C. TIED TO JOIST BOTTOM CHORDS 1/4" 12 KING HANGER WIRE, 6" LAYER OF THERMAFIBER SOUND ATTENUATION FIRE BLANKETS (SAFB) OR EQUAL FITTED TIGHTLY IN PLACE BETWEEN JOISTS (NO VOIDS).

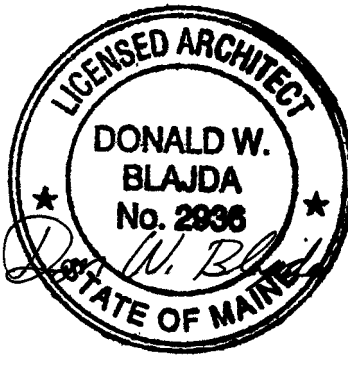

1 FIFTH FLOOR CEILING PLAN
 A26 1/8" = 1'-0"

DATE	REVISION SCHEDULE	REVISION DESCRIPTION

COPECHEE
 CONSTRUCTION CORPORATION
 11 CORPORATE DRIVE, BELMONT NH 03220
 PHONE (603) 527-9090 FAX (603) 527-9191

FIFTH FLOOR
 CEILING PLAN

PROJECT: COMMERCIAL & MAPLE STREET
 MIXED USE DEVELOPMENT
 PORTLAND, ME

DATE: 05-09-13
 SCALE: SEE PLAN
 DRAWN BY: KPH

A26
 SHEET: