

### ROOM FINISH SCHEDULE

LOWER LEVEL REF: SHEET A1.0												
ROOM NO.	ROOM NAME	FLOOR		BASE		WALL		CEILING			REMARKS	ROOM NO.
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	CLG. HT.		
001	ELEVATOR MACHINE RM	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"	2 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	001
002	ELEVATOR LOBBY	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		002
003	SOUTH STAIR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	RUBBER TREADS & RISERS	003
004	ELECTRIC ROOM	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	004
005	STORAGE	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		005
006	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		006
007	MECHANICAL ROOM	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM/CONC	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	007
008	WATER ROOM	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM/CONC	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	008
009	MAIN ELECTRIC RM.	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM/CONC	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	009
010	TRASH RM.	CONCRETE	SEAL CONC.	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	010
011	CORRIDOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"	RUBBER TREADS & RISERS	011
012	CORRIDOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		012
013	MEN'S RM.	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	1 HR	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS, TILE SHOWER UNIT	013
014	MEN'S RM.	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	1 HR	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS, TILE SHOWER UNIT	014
015	BIKE STORAGE	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		015
017	CORRIDOR	CONCRETE	VCT/RUBBER	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	VARIES	RUBBER TREADS & RISERS	017
018	RAMP	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	9'-0"	CORRIDOR - VCT, STAIRS - RUBBER, RAMP - NON SLIP VCT	018
019	CORRIDOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	7'-6"		019
020	MEN'S RM.	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	1 HR	7'-6"	CT TO 8' MET WALL, GYP. @ OTHERS, TILE SHOWER UNIT	020
021	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	7'-6"		021
022	STORAGE RM.	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	7'-6"		022
023	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM/CONC	PAINT	ACT	1 HR	8'-6"		023
024	ATM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		024
X03	MEN'S ROOM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-0"		X03
X04	WOMEN'S ROOM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-0"		X04

FIRST FLOOR REF: SHEET A1.1												
ROOM NO.	ROOM NAME	FLOOR		BASE		WALL		CEILING			REMARKS	ROOM NO.
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	CLG. HT.		
101	ENTRY VESTIBULE	CONCRETE	PORC. TILE	WOOD	STAIN	WD/GWB	STN/PT	ACT	1 HR	10'-0"	SURFACE MID WALK OFF MAT, MILKWORK WALL PANEL 48" AFF	101
102	LOBBY	CONCRETE	PORC. TILE	WOOD	STAIN	WD/GWB	STN/PT	ACT	1 HR	10'-0"	MILKWORK WALL PANEL 48" AFF	102
103	SOUTH STAIR	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	CARPET TREADS & RISERS W/ RUBBER NOSING	103
104	ELEVATOR LOBBY	CONCRETE	PORC. TILE	WOOD	STAIN	WD/GWB	STN/PT	ACT	1 HR	10'-0"		104
105	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	9'-0"		105
106	ELECTRIC RM.	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"	1 HR RATED FLOOR/CLG ASSEMBLY SEE F3/A4.61	106
107	MEN'S RM.	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	1 HR	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	107
108	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	8'-6"		108
109	CORRIDOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	9'-6"		109
110	WOMEN'S RM.	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	1 HR	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	110
111	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	9'-0"		111
112	CORRIDOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	9'-0"		112
113	EAST STAIR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	10'-0"		113
114	STORAGE	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	1 HR	10'-0"		114

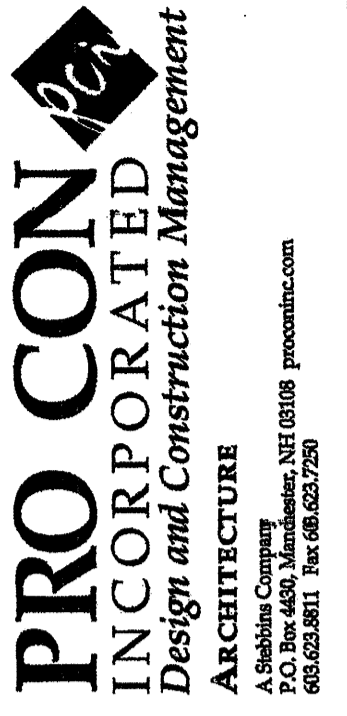
SECOND & THIRD FLOOR REF: SHEET A1.2 & A1.3												
ROOM NO.	ROOM NAME	FLOOR		BASE		WALL		CEILING			REMARKS	ROOM NO.
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	CLG. HT.		
X03	SOUTH STAIR	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	CARPET TREADS & RISERS W/RUBBER NOSING	X03
X04	ELECTRIC ROOM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"		X04
X05	CORRIDOR	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN		X05
X06	MEN'S ROOM	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	--	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	X06
X07	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN		X07
X08	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	--	8'-6"		X08
X09	WOMEN'S ROOM	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	--	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	X09
X10	EAST STAIR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	RUBBER TREADS & RISERS	X10

FOURTH FLOOR REF: SHEET A1.4												
ROOM NO.	ROOM NAME	FLOOR		BASE		WALL		CEILING			REMARKS	ROOM NO.
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	CLG. HT.		
402	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	--	8'-6"		402
403	SOUTH STAIR	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	CARPET TREADS & RISERS W/RUBBER NOSING	403
404	ELECTRIC ROOM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"		404
407	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN		407
409	RAMP	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	RUBBER TREADS & RISERS	409
450	EAST STAIR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	TREADS & RISERS TO MATCH EXISTING STAIR	450

FIFTH FLOOR REF: SHEET A1.5												
ROOM NO.	ROOM NAME	FLOOR		BASE		WALL		CEILING			REMARKS	ROOM NO.
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	CLG. HT.		
503	SOUTH STAIR	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	CARPET TREADS & RISERS W/RUBBER NOSING	503
504	ELECTRIC ROOM	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	GWB	PAINT	8'-6"		504
506	MEN'S ROOM	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	--	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	506
507	TENANT SPACE	CONCRETE	CARPET	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN		507
508	JANITOR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	ACT	--	8'-6"		508
509	WOMEN'S ROOM	CONCRETE	CT	CT	--	GYP SUM	PAINT	ACT	--	8'-6"	CT TO 8' MET WALL, GYP. @ OTHERS	509
550	EAST STAIR	CONCRETE	VCT	4" VINYL	--	GYP SUM	PAINT	--	PAINT	OPEN	TREADS & RISERS TO MATCH EXISTING STAIR	550



PRO CON INCORPORATED  
Design and Construction Management  
ARCHITECTURE  
A Federal Company  
P.O. Box 460, Manchester, NH 03108  
603.632.8811 Fax 603.632.7920

CUSTOM HOUSE SQUARE  
300 FORE STREET  
PORTLAND, MAINE  
ROOM FINISH SCHEDULE

PROJECT ARCHITECT:  
MW  
DRAWN BY:  
BR, SO  
PROJECT #:  
300506

# A6.3

NOT FOR CONSTRUCTION  
05/26/06