BAKER NEWMAN NOYES
4th AND 5th FLOOR FIT UP
PORTLAND , MAINE

GENERAL NOTES:

1. FIELD VERIFY ALL DIMENSIONS AND LAYOUT PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT IN WRITING OF ANY DISCREPANCIES OR INCONSISTENCIES. FAILURE TO REPORT ANY DISCREPANCIES WITHIN THESE CONSTRUCTION DOCUMENTS TO THE ARCHITECT WILL NOT BE GROUNDS FOR ADDITIONAL COST OR CHANGE ORDERS.
2. "PROVIDE" MEANS "FURNISH AND INSTALL".
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL MATERIALS (UNLESS NOTED OTHERWISE), AND WORKMANSHIP IN ACCORDANCE WITH FEDERAL, STATE, CITY AND LOCAL BUILDING CODES AND THEIR REQUIREMENTS.
4. THE CONTRACTOR AND ALL TRADES SHALL NOTE REQUIREMENTS OF "GENERAL NOTES" ON ALL SHEETS.

PARTITION NOTES:

1. PARTITION TYPE DRAWINGS ARE GRAPHIC REPRESENTATION ONLY, THEY ARE NOT TO SCALE TYPICAL.
2. ALL BATT INSULATION IS TO BE FULL THICKNESS AND FULL HEIGHT UNLESS NOTED OTHERWISE.

ABBREVIATIONS

AB	ANCHOR BOLT	L	ANGLE; LENGTH
AC, A/C	AIR CONDITIONING	LF	LEFT
ACCU	AIR CONDITIONING CONDENSER UNIT	LINO	SHEET LINOLEUM
ACPLAS	ACOUSTICAL PLASTER	LL	LIVE LOAD
ACT	ACOUSTIC CEILING TILE	LLH	LONG LEG HORIZONTAL
AFF	ABOVE FINISHED FLOOR	LLV	LONG LEG VERTICAL
AGG	AGGREGATE	LP	LIGHTING PANEL; LIQUIFIED PROPANE
ALT	ALTERNATE		
AP	ACCESS PANEL	MAX	MAXIMUM
APROX	APPROXIMATE	MB	MARKER BOARD
ARCH	ARCHITECTURAL	MDO	MEDIUM DENSITY OVERLAY
		MECH	MECHANICAL
BCX	BOTTOM CHORD EXTENSION	MFR	MANUFACTURER
BD	BOARD	MIN	MINIMUM
BIT	BITUMINOUS	MISC	MISCELLANEOUS
BLDG	BUILDING	MO	MASONRY OPENING
BLP	BORROWED LIGHT PANEL	MR	MOISTURE-RESISTANT
BO	BOTTOM OF	MUA	MAKE-UP AIR
BOF	BOTTOM OF FOOTING		
BOS	BOTTOM OF STEEL	N	NOSING
BOT	BOTTOM	NCB	NEW CATCH BASIN
BRDG	BRIDGING	NDMH	NEW DRAIN MANHOLE
BRG	BEARING	NFM	NEW FORCE MAINE
BS	BOTH SIDES	NIC	NOT IN CONTRACT
BSE	BSBRICK SHELF ELEVATION	NS	NEAR SIDE
		NSD	NEW STORM DRAIN LINE
C	CHANNEL	NSS	NEW SANITARY SEWER LINE
CB	CATCH BASIN; CHALKBOARD	NTS	NOT TO SCALE
CEM BD	CEMENTITIOUS BACKER BOARD	NW	NEW WATER LINE
CFM	CUBIC FEET PER MINUTE		
CIP	CAST IN PLACE	OC	ON CENTER
CJ	CONTROL JOINT; CONSTRUCTION JOINT	OF	OUTSIDE FACE
		OH	OVERHEAD
CL	CENTER LINE	OFOI	OWNER FURNISHED/OWNER INSTALLED
CLL	CONTRACT LIMIT LINE	OFCI	OWNER FURNISHED/CONTRACTOR INSTALLED
CLR	CLEAR		
CMU	CONCRETE MASONRY UNIT	PA	PUBLIC ADDRESS
COL	COLUMN	PAF	POWDER-ACTUATED FASTENER
CONC	CONCRETE	PDU	POOL DEHUMIDIFICATION UNIT
CONT	CONTINUOUS	PL	PLATE; PROPERTY LINE
CT	CERAMIC TILE	PLAM	PLASTIC LAMINATE
CUH	CABINET UNIT HEATER	PLF	POUNDS PER LINEAR FOOT
		PP	POWER PANEL
D	DIAMETER	PSF	POUNDS PER SQUARE FOOT
DBL	DOUBLE	PSI	POUNDS PER SQUARE INCH
DF	DRINKING FOUNTAIN	PT	PRESSURE-TREATED
DL	DEAD LOAD	PVC	POLYVINYL CHLORIDE
DR	DISPLAY RAIL	PVMT	PAVEMENT
DTL	DETAIL		
DW	DISHWASHER	R	RISER; RADIUS
DWG	DRAWING	RB	RESILIENT BASE
		RD	ROOF DRAIN
EA	EACH	REINF	REINFORCED
EF	EXHAUST FAN; EACH FACE	REQ'D	REQUIRED
EJ	EXPANSION JOINT	RT	RIGHT
EL	ELEVATION	RO	ROUGH OPENING
ELEC	ELECTRICAL	ROW	RIGHT OF WAY
EOP	EDGE OF PAVEMENT	RR	RUB-RAIL
EPDM	ETHYLENE PROPYLENE DIENE MONOMER	RTU	ROOFTOP UNIT (HVAC)
		SACT	SUSPENDED ACOUSTIC TILE CEILING
EQ	EQUAL		
EW	EACH WAY	SC	SOLID CORE
EWC	ELECTRIC WATER COOLER	SF	SQUARE FOOT; SUPPLY FAN
EXIST	EXISTING	SHT	SHEET
EXP	EXPANSION	SIM	SIMILAR
EXT	EXTERIOR	SK	SHEAR KEY
		SN	SANITARY NAPKIN (DISPENSER)
FB	FLAT BAR	SP	SPECIAL
FBO	FURNISHED BY OTHERS	SS	STAINLESS STEEL
FCO	FLOOR CLEAN-OUT	STA	STATION
FD	FLOOR DRAIN	STL	STEEL
FE	FIRE EXTINGUISHER	STRUC	STRUCTURAL
FF	FINISHED FLOOR; FAR FACE		
FFE	FINISHED FLOOR ELEVATION	T	TREAD
FO	FRAMED OPENING	TB	TACKBOARD
FRP	FIBERGLASS REINFORCED PLASTIC	T&B	TOP AND BOTTOM
FS	FAR SIDE	TBM	TEMPORARY BENCHMARK
FTG	FOOTING	TCE	TOP CHORD EXTENSION
		TJ	TIE JOIST
GA	GUAGE	TO	TOP OF
GALV	GALVANIZED	TOC	TOP OF CONCRETE
GB	GRAB BAR	TOF	TOP OF FOOTING
GC	GENERAL CONTRACTOR	TOM	TOP OF MASONRY
GDT	GYPSUM DROP-IN TILE	TOP	TOP OF PIER
GV	GRAVITY VENT	TOS	TOP OF STEEL; TOP OF SLAB
GWB	GYPSUM WALL BOARD	TOW	TOP OF WALL
H	HORIZONTAL	TP	TOILET PAPER (DISPENSER); TEST PIT
HC	HANDICAPPED; HOLLOW CORE	TS	TUBE STEEL
HORIZ	HORIZONTAL	TYP	TYPICAL
HM	HOLLOW METAL		
HRU	HEAT RECOVERY UNIT	UH	UNIT HEATER
H&V	HEATING AND VENTILATING	UNO	UNLESS NOTED OTHERWISE
HVAC	HEATING, VENTILATING AND AIR CONDITIONING		
		V	VENT PIPE; VERTICAL
I	INCLUDED ANGLE	VB	VAPOR BARRIER
ID	INSIDE DIAMETER	VCT	VINYL COMPOSITION TILE
IF	INSIDE FACE	VERT	VERTICAL
IJ	ISOLATION JOINT	VP	VISION PANEL
IMP	IMPACT RESISTANT	VTR	VENT THROUGH THE ROOF
INS	INSULATED		
INV	INVERT	W/	WITH
		WC	WATER CLOSET
JS	JOIST SUBSTITUTE	WF	WIDE FLANGE
		WH	WATER HEATER
K	KIPS	W/O	WITHOUT
		WP	WORKING POINT
		WS	WEB STIFFENER
		WWF	WELDED WIRE FABRIC

SYMBOL LEGEND

- A00 / AE000 — BUILDING SECTION
- A00 / AE000 — WALL SECTION
- A00 / AE000 — DETAIL
- A00 / AE000 — EXTERIOR ELEVATION
- A / D A00 B / C AE000 — INTERIOR ELEVATION
- LEVEL LINE
- (8) CIRCLE NOTE
- (8) WINDOW TAG
- 8 — PARTITION TAG
- 402 — DOOR TAG
- MAIN LOBBY / A402 — ROOM NAME / ROOM NUMBER
- A — COLUMN BUBBLE AND CENTER LINE
- (S) — BACKER ROD AND SEALANT

GRID NO.	TITLE
SCALE	REFERENCE SHEET

DRAWING LIST:

GENERAL

GI001 COVER SHEET, LEGEND & ABBREVIATIONS

ARCHITECTURAL

AE101 FOURTH FLOOR PLAN
AE102 FIFTH FLOOR PLAN
AE103 FOURTH FLOOR REFLECTED CEILING PLAN
AE104 FIFTH FLOOR REFLECTED CEILING PLAN
AE105 ROOF PLAN AND DETAILS

AE201 INTERIOR ELEVATIONS
AE202 INTERIOR ELEVATIONS

AE501 SECTIONS AND DETAILS
AE502 STAIR PLANS AND DETAILS
AE503 SECTIONS AND DETAILS

AE601 SCHEDULES
AE602 SCHEDULES

AF101 FOURTH AND FIFTH FLOOR FINISH PLANS
AF102 FOURTH FLOOR FINISH PLAN
AF103 FIFTH FLOOR FINISH PLAN

IF101 FOURTH FLOOR FURNISHINGS PLAN
IF102 FIFTH FLOOR FURNISHINGS PLAN

STRUCTURAL

SF101 STAIRWAY FRAMING PLAN AND DETAILS

MECHANICAL

M-001 LEGEND AND ABBREVIATIONS

MH101 FOURTH FLOOR HVAC DUCTWORK PLAN
MH102 FIFTH FLOOR HVAC DUCTWORK PLAN

M-501 DETAILS

M-601 SCHEDULES

PLUMBING

PL101 FOURTH FLOOR PLUMBING PLAN
PL102 FIFTH FLOOR PLUMBING PLAN

PL601 SCHEDULES

ELECTRICAL

E-001 LEGEND AND GENERAL NOTES

EP101 FOURTH FLOOR POWER PLAN
EP102 FIFTH FLOOR POWER PLAN

EL101 FOURTH FLOOR LIGHTING PLAN
EL102 FIFTH FLOOR LIGHTING PLAN

EY101 FOURTH FLOOR SYSTEMS PLAN
EY102 FIFTH FLOOR SYSTEMS PLAN

E-601 LIGHT FIXTURE SCHEDULE AND PART PLAN

EP601 PANEL SCHEDULES

(E)	MATCH EXISTING ADJACENT CONSTRUCTION MATERIALS AND FINISHES INCLUDING ANY FIRE RATINGS THE EXISTING PARTITION MAINTAINS.	
1g	1 HOUR RATED, UL DESIGN: U419 20 GAGE 3-5/8"x1-1/4" FLOOR AND CEILING RUNNERS FASTENED @ 24" O.C. MAX. WITH 3-5/8"x1-5/8" 20 GAGE STUDS WITH 3/8" RETURNS SPACED 16" O.C. FASTEN (1) LAYER 5/8"x4' TYPE X GWB TO BOTH SIDES OF STUDS & TRACKS WITH 1" TYPE S SELF TAPPING SCREWS AT 8" O.C. ALONG EDGES & 12" O.C. INFIELD. APPLY 2" PAPER JOINTS AND FINISH W/2 COATS OF JOINT COMPOUND. SEAL TIGHT TO STRUCTURE AND DECK. BLANKET INSULATION IN STUD CAVITIES.	
2g	3-5/8" 22 GAGE METAL STUDS @ 16" O.C. TO DECK. (1) LAYER 5/8" GWB TO DECK EACH SIDE.	
2h	3-5/8" 22 GAGE METAL STUDS @ 16" O.C. TO 6" ABOVE CEILING. (1) LAYER 5/8" GWB EACH SIDE. BRACE TO STRUCTURE.	
2c	3-5/8" 22 GAGE METAL STUDS @ 16" O.C. TO DECK. (1) LAYER 5/8" GWB TO DECK EACH SIDE. BATT INSULATION.	
2d	3-5/8" 22 GAGE METAL STUDS @ 16" O.C. TO 6" ABOVE CEILING. (1) LAYER 5/8" GWB EACH SIDE. BRACE TO STRUCTURE. BATT INSULATION.	
3g	3-5/8" 22 GAGE METAL STUDS @ 16" O.C. TO 6" ABOVE CEILING. (1) LAYER 5/8" GWB TAGGED SIDE. BRACE TO STRUCTURE.	TAGGED SIDE
4g	6" 22 GAGE METAL STUDS @ 16" O.C. TO 6" ABOVE CEILING. (1) LAYER 5/8" GWB EACH SIDE. BRACE TO STRUCTURE. BATT INSULATION.	

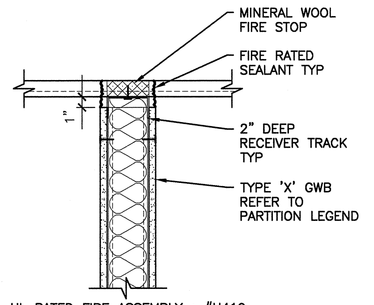

UL RATED FIRE ASSEMBLY : #U419

GYPSUM WALL : PERPENDICULAR TO DECK FLUTES

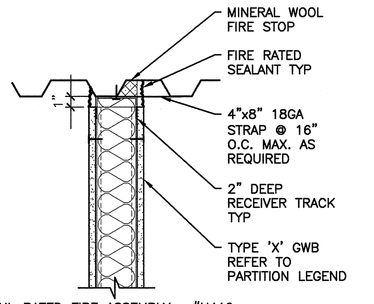

UL RATED FIRE ASSEMBLY : #U419

GYPSUM WALL : PARALLEL TO DECK FLUTES

A7	PARTITION LEGEND	1" = 1'-0"
A11	TYPICAL TOP OF WALL DETAILS	1 1/2" = 1'-0"

REV.	DESCRIPTION	DATE
0	ISSUED FOR PERMIT/CONTRACT	6-11-04

ISSUED FOR PERMIT/CONTRACT 6-11-04

CURRENT ISSUE STATUS:

LICENSED ARCHITECT JANET L. JENSEN #1991 STATE OF MAINE

SMRT

ARCHITECTURE ENGINEERING PLANNING

SMRT
144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-1070

PROJECT: BAKER NEWMAN NOYES FIT-UP, PORTLAND, MAINE

SHEET TITLE: COVER SHEET, LEGEND & ABBREVIATIONS

SCALE:	AS NOTED	DATE:	6-11-04
PROJECT MANAGER:	JLH	GRAPHIC SCALE:	0" 1"
JOB CAP/DRAWN:	DJM		
A/E OF RECORD:	JLH	SHEET No.	GI001
SMRT CAD FILE:	GI001-03137		
PROJECT No.	03137		

© COPYRIGHT 2004 SMRT INC.