

NOTE:

1. SEE SHEET E-001 FOR LEGEND AND GENERAL NOTES.


KEYED NOTES:

1. MOUNT RECEPTACLE 42" AFF TO CENTER OF DEVICE.
2. PROVIDE WALL FEED TO MODULAR FURNITURE. COORDINATE W/FURNITURE INSTALLER FOR LOCATIONS OF ELECTRICAL CONNECTIONS. WIRING TO BE 3/12 AWG PHASE CONDUCTORS, 1#10 AWG NEUTRALS & 1#12 AWG GND.
3. PROVIDE POWER POLE FEED TO MODULAR FURNITURE. COORDINATE W/FURNITURE INSTALLER FOR LOCATIONS OF ELECTRICAL CONNECTIONS. WIRING TO BE 3/12 AWG PHASE CONDUCTORS, 1#10 AWG NEUTRALS & 1#12 AWG GND.
4. FURNISH AND INSTALL A WALKER RB4 SERIES OR EQUAL FOUR COMPARTMENT RECESSED FLOOR BOX. PROVIDE WITH TWO DUPLEX RECEPTACLES AND TWO VOICE/DATA OUTLETS. PROVIDE FLANGED ACTIVATION KIT WITH CARPET INSERT SLOTS.
5. MOUNT RECEPTACLES ON INSIDE WALL OF BUILT-IN CASEWORK. SEE ARCHITECTURAL DETAILS AND SECTIONS FOR CASEWORK WALL TYPE AND DEPTH.
6. PROVIDE POWER FOR MOTORIZED SCREEN & INSTALL SCREEN. PROVIDE POWER FOR BUILT-IN CASEWORK. COORDINATE WITH EQUIPMENT INSTALLER FOR LOCATION OF ELECTRICAL CONNECTION AND CONTROL WIRING REQUIRED. PRIOR TO ROUGH-IN, VERIFY LOCATION OF CONTROL SWITCH WITH OWNER AND ARCHITECT.
7. PROVIDE MANUAL TOGGLE SWITCH FOR SERVICE DISCONNECT AND WIRING TO ELECTRICAL NOT WATER HEATER. PROVIDE CONTRACTOR FOR EXACT LOCATION OF ELECTRICAL CONNECTION.

REV.	ISSUED FOR PERMIT/CONTRACT	DATE
0		6-11-04

ISSUED FOR PERMIT/CONTRACT
6-11-04

CURRENT ISSUE STATUS:

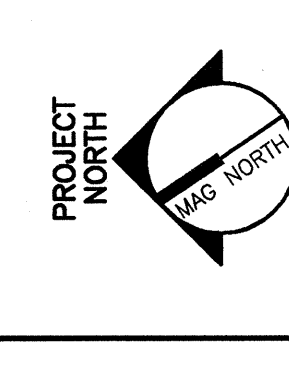

BAKER NEWMAN NOYES
FIT-UP
PORTLAND, MAINE

PROJECT TITLE:
**FIFTH FLOOR
POWER PLAN**

SHEET TITLE:
SCALE: 1/8" = 1'-0"
DATE: 6-11-04
PROJECT MANAGER: JIH
JOB CADD/DRAWN: DJM/JAM
A/E OF RECORD: DUT
SHEET NO.: EP102
PROJECT NO.: 03137

