Location of Construction:	Owner:	Inversational Corp.	Phone: 766-2402	Permit No: 1 80 487
Owner Address:	Lessee/Buyer's Name:	hone:	BusinessName:	PERMIT ISSUED
Contractor Name:	Address: 251 Yaymouth I	Phone Gray, MF. 14039		Permit Issued:
Past Use:	Proposed Use:	COST OF WORK \$ 4,400.90		TAN TO JOSE
Office Space	Same	FIRE DEPT. □ 7 □ □ Signature:	Approved INSPECTION: Use Group 3 Type OCA 96 Signature:	201e. CBL. 041-A-015
Proposed Project Description:			CTIVITIES DISTRICT (P.	Zoning Approval:
Ist Reso			Approved Approved with Conditions: Denied	Special Zone or Reviews: Shoreland Wetland Flood Zone
		Signature:	Date:	☐ Subdivision ☐ Site Plan maj ☐minor ☐mm
Permit Taken By:	Date Applied For:	11 May 1998		Zoning Appeal
 Building permits do not include plur Building permits are void if work is r tion may invalidate a building permit 	ot started within six (6) months of the dat	e of issuance. False informa-	PERMIT ISSUED WITH REQUIREMENT	☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
			PERMIT ISSUED WITH REQUIREMENTS	Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
	CERTIFICATIO			□Appoved
I hereby certify that I am the owner of rec authorized by the owner to make this app if a permit for work described in the appli areas covered by such permit at any reason	lication as his authorized agent and I agre cation is issued, I certify that the code off	ee to conform to all applicable icial's authorized representati	e laws of this jurisdiction. In add ive shall have the authority to ent	ition, Denied
		li Eay i	1998	
	ADDRESS:	DATE:	PHONE:	
SIGNATURE OF APPLICANT	ADDRESS.			
SIGNATURE OF APPLICANT RESPONSIBLE PERSON IN CHARGE OF			PHONE:	CEO DISTRICT

		2-25-00 Completed per p	114/48 hus
Foundation: Framing: Plumbing: Final: Other		Mans BB	by forments outractor.
Inspection Record Date			Reety held

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Application Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction: BRONNE TRACIN	DE COMPANY, ZGO COMMER	CIAL ST. PORTLAND
Total Square Footage of Proposed Structure 9,171		783
Tax Assessor's Chart, Block & Lot Number		CGRf. Telephone#:
Chart# 041 Block# A Lot# 015	LOY MITCHELL	766-2402
Owner's Address:	Lessee/Buyer's Name (If Applicable)	Cost Of Work:
PORTLAND, MG. 04101	N/A	\$ 4,400.00
Proposed Project Description:(Please be as specific as possible)	TEAR DOWN ONE EXIS	TING OFFICE WALL.
REBUILD NEW NON- BEARIN	VE WALLS PER ENLESSE	O PLAN. PRELIOUSLY
LALKED THROUGH WITH	ARTHUR ROWE.	
Contractor's Name, Address & Telephone		lmouth Ro. (207)-657-
limol B		MC. 04039 2705
Current Use: OFFICE SPACE	Proposed Use: Office	SPACE
•All Electrical Installation must comply w •HVAC(Heating, Ventililation and Air Condi You must Include the following with you application	cted in compliance with the State of Maine ith the 1996 National Electrical Code as a itioning) installation must comply with th	e Plumbing Code. mended by Section 6-Art III. e 1993 BOCA Mechanical Code.
	f your Construction Contract, if available	
_, oop, o.	3) A Plot Plan/Site Plan	1 21/0
Minor or Major site plan review will be required for		408.
checklist outlines the minimum standards for a site p		The same of the sa
	4) Building Plans	OF BUILDING INSPECTS OF
A complete set of construction drawings showing all	tion documents must be designed by a re	istered design professional.
Cross Sections w/Framing details (including)	ng porches, decks w/ railings, and accessory	structure 1 1998
Floor Plans & Elevations	and portation, devilse, rannings, and developery	1 1550
Window and door schedules		13
• Foundation plans with required drainage a	nd dampproofing	III BEEFFE
Electrical and plumbing layout. Mechanica	al drawings for any specialized equipment su	dl as furnaces, chimneys, gas
equipment, HVAC equipment (air handlin	ig) or other types of work that may require sp	ecial review must be included.


Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

enforce the provisions of the codes a	applicable to this permi	L						_
Signature of applicant:	marot E.	w. An	A	Date:	5/11	1	98	

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

2 ND FLR, OFFICE REMODEL FOR BROWNE TRADING CO.

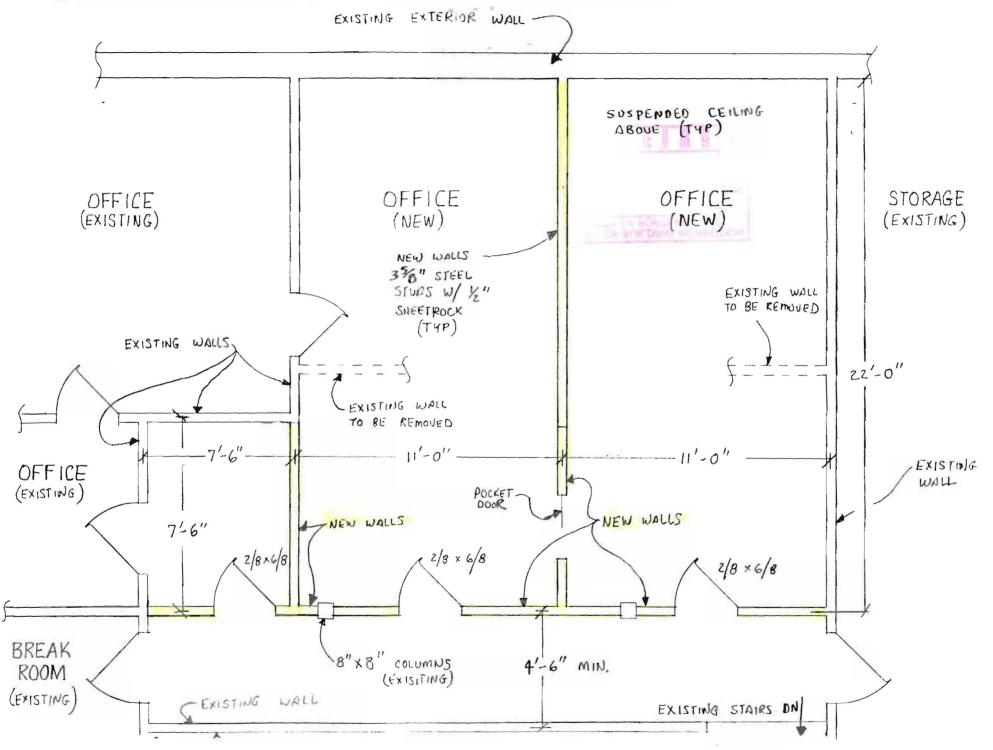

BUILDING PERMIT REPORT

DATE: 5/13/56 ADDRESS: 260 Commercial for
REASON FOR PERMIT: rene tien;
BUILDING OWNER: Brown Internation 1 7nc.
CONTRACTOR: Timethy Simith
PERMIT APPLICANT:
use group $R.3$ boca 1996 construction type $5B$
CONDITION(S) OF APPROVAL
This Permit is being issued with the understanding that the following conditions are met:
Approved with the following conditions: 4/ 47 × 20 × 24 × 26
This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be
obtained. (A 24 hour notice is required prior to inspection)
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to
verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from
adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting
rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior
spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum
board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA Nation
Mechanical Code/1993).
Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's
building code.
8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking
surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum
height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A. B. H-4, I-1. I-2 M and R and
public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a
diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect
(Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)
Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". Headroom in habitable space is a minimum of 7'6".
 Headroom in habitable space is a minimum of 7'6". Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum
10. Stair construction in ose Group R-3 & R-4 is a minimum of to dead and 7 3/4 maximum rise. An other ose group minimum of the dead and 7 3/4 maximum rise.
The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or
exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special
knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more
than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear
opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm
and a minimum net clear opening of 5.7 sq. ft.
13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it

All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)

The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing

automatic extinguishment.

16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

exits directly from the apartment to the building exterior with no communications to other apartment units.

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA ≠72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023, & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
- 424. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
 - 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).

cc: Lt. McDougall PFD Marge Schmuckal

Code