



**SHEET NOTES**

- 01 PORTION OF EXISTING WALL TO BE REMOVED FOR NEW LOUVER PLACEMENT. OPENING SIZE TO BE COORDINATED WITH DESIGN/BUILD CONTRACTOR.
- 02 PORTION OF EXISTING WALL TO BE REMOVED FOR NEW LOUVER PLACEMENT. OPENING SIZE TO BE COORDINATED WITH DESIGN/BUILD CONTRACTOR.
- 04 REMOVE EXISTING CEILING AND LIGHTING FIXTURES. MAINTAIN DEVICES SERVED BY SAME CIRCUIT.
- 05 REMOVE EXISTING TILE FLOORING. MECHANICALLY SCRAPE OR SHOT BLAST CONCRETE FOR AN ADHESIVE FREE SUBSTRATE.
- 06 PREPARE EXISTING WALLS FOR NEW PAINT.
- 07 REMOVE EXISTING RUBBER FLOORING. MECHANICALLY SCRAPE OR SHOT BLAST CONCRETE FOR AN ADHESIVE FREE SUBSTRATE.
- 09
- 10 EXISTING HAIR DRYING STATION TO BE REMOVED AND REPLACED WITH NEW. REINFORCED STRUCTURE BY WALL TO REMAIN.
- 11 EXISTING TO REMAIN MIRROR.
- 13 EXISTING TO REMAIN CEILING
- 14 END OF EXISTING CEILING TO REMAIN.
- 25 EXISTING TO REMAIN PLUMBING FIXTURES
- 26 REMOVE PORTION OF EXISTING WALL FOR NEW DOOR OPENING. COORDINATE WITH CONSTRUCTION PLAN
- 28 EXISTING TO REMAIN FOUNDATION COMPONENTS / OBSTRUCTIONS
- 29 REMOVE SHOWER ENCLOSURE. SAVE FOR REINSTALLATION. COORDINATE WITH CONSTRUCTION PLAN

ciee

Council on International Educational Exchange

300 Fore Street  
Portland, ME

**Gensler**

One Beacon Street  
Third Floor  
Boston MA 02108  
(617) 619-3700  
(617) 619-3701


Date & Issue Description	By	Check
08/16/16 ISSUED FOR PERMIT	ACH	AQ GL

**GENERAL NOTES**

**LEGEND**

- AREA NOT IN CONTRACT
  - EXISTING CONSTRUCTION TO REMAIN
  - EXISTING CONSTRUCTION TO BE DEMOLISHED
- DEMOLITION INCLUDES, BUT IS NOT LIMITED TO: FLOORING, CEILINGS, PARTITIONS, WALLS, DOORS, FRAMES, AND FINISHES AS INDICATED. COORDINATE EXTENTS OF DEMOLITION WITH CONSTRUCTION PLANS, AND PERFORM DEMOLITION AS NECESSARY TO COMPLETE THE NEW WORK.

Seal/Signature

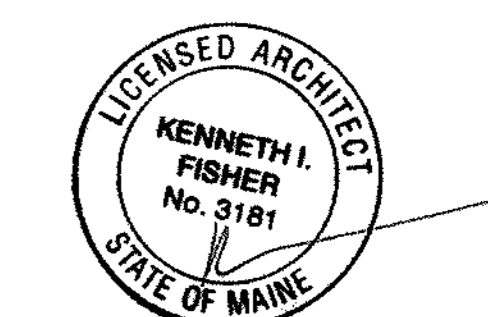


Project Name  
CIEE HQ Renovations

Project Number  
11.7086.000

Description  
DEMOLITION PLAN - BASEMENT LEVEL

Scale



**A01.000**

© 2016 Gensler