

SHEET NOTES

- 04 REMOVE EXISTING CEILING AND LIGHTING FIXTURES; MAINTAIN DEVICES SERVED BY SAME CIRCUIT.
- 12 REMOVE EXISTING VCT FLOORING; MECHANICALLY SCRAPE OR SHOT BLAST CONCRETE FOR AN ADHESIVE FREE SUBSTRATE.
- 13 EXISTING TO REMAIN CEILING
- 14 END OF EXISTING CEILING TO REMAIN.
- 15 REMOVE EXISTING SLATE FLOORING.
- 16 REMOVE EXISTING WALL WAINSCOTS.
- 17 REMOVE EXISTING CORK WALL COVERINGS.
- 18 EXISTING WATER FOUNTAIN TO REMAIN.
- 19 REMOVE EXISTING CARPET FLOORING; MECHANICALLY SCRAPE OR SHOT BLAST CONCRETE FOR AN ADHESIVE FREE SUBSTRATE; COORDINATE WITH CONSTRUCTION PLAN.
- 20 EXISTING RAILING TO REMAIN. PREPARE IT TO BE PAINTED.
- 21 EXISTING WALK OFF MAT AND SLATE FLOORING IN VESTIBULE TO REMAIN.
- 22 REMOVE EXISTING FILM AND RESIDUAL ADHESIVE IN STOREFRONT GLASS
- 27 DISCONNECT AND REMOVE EXISTING POWER POLE AND WIRING BACK TO POINT OF CONCEALMENT; PROPERLY CAP AND/OR PLUG TERMINATED ENDS AND MARK LOCATIONS OF TERMINATED ENDS; COORDINATE WITH ELECTRICAL DESIGN/BUILD CONTRACTOR



Council on International Educational Exchange
300 Fore Street
Portland, ME




One Beacon Street
Third Floor
Boston MA 02108
(617) 619-5700
(617) 619-5701

Date & Issue Description	By	Check
09/16/16 ISSUED FOR PERMIT	ACH	AQ GL

GENERAL NOTES

LEGEND


- AREA NOT IN CONTRACT
 - EXISTING CONSTRUCTION TO REMAIN
 - EXISTING CONSTRUCTION TO BE DEMOLISHED
- DEMOLITION INCLUDES, BUT IS NOT LIMITED TO: FLOORING, CEILINGS, PARTITIONS, WALLS, DOORS, FRAMES, AND FINISHES AS INDICATED. COORDINATE EXTENTS OF DEMOLITION WITH CONSTRUCTION PLANS, AND PERFORM DEMOLITION AS NECESSARY TO COMPLETE THE NEW WORK.

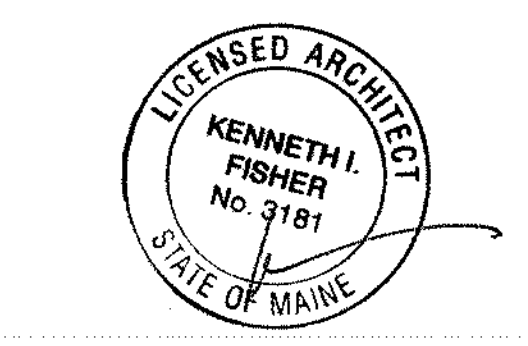

Project Name
CIEE HQ Renovations

Project Number
11.7096.000

Description
DEMOLITION PLAN - LEVEL 01

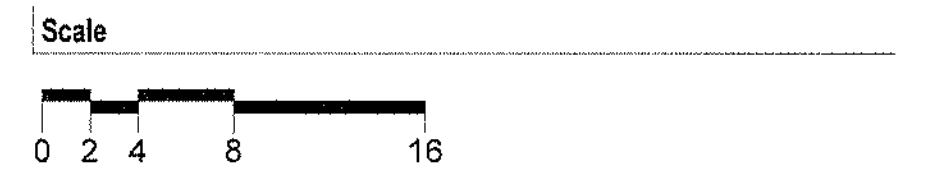

A01.001

© 2016 Gensler