

MANUFACTURERS NOTES:

- 1. ALL DESIGN SPECIFICATIONS FOR STORMTECH SC-740 CHAMBERS SHALL BE IN ACCORDANCE WITH THE STORMTECH DESIGN MANUAL
- 2. THE INSTALLATION OF STORMTECH SC-740 CHAMBERS SHALL BE IN ACCORDANCE WITH THE LATEST STORMTECH INSTALLATION INSTRUCTIONS
- 3. THE CONTRACTOR IS ADVISED TO REVIEW AND UNDERSTAND THE INSTALLATION INSTRUCTIONS PRIOR TO BEGINNING SYSTEM INSTALLTION. CALL 1-888-892-2694 OR VISIT WWW.STORMTECH.COM TO RECIEVE A COPY OF THE LATEST STORMTECH INSTALLATION INSTRUCTIONS
- 4. CHAMBERS SHALL MEET THE DESIGN REQUIREMENTS AND LOAD FACTORS SPECIFIED IN SECTION 12.12 OF THE LATEST EDITION OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS
- ENGINEERS NOTES:

— STORM DRAIN INLET

CONNECTION (TYP)


- STORM DRAIN OUTLET


CONNECTION (TYP)

STORMTECH - CONNECTION

NOT TO SCALE

- 1. THE LAYOUT AND DIMENSION OF THE SUBSURFACE DETENTION MAY BE MODIFIED WITH AN ENGINEER APPROVED EQUAL WHICH PROVIDES EQUAL DETENTION STORAGE AND WATER QUALITY TREATMENT.
- 2. THE SUBSURFACE DETENTION SHALL BE INSPECTED BY THE DESIGN ENGINEER AT THE FOLLOWING
- AFTER PRELIMINARY CONSTRUCTION OF THE SUBSURFACE DETENTION GRADES
- DURING THE CONSTRUCTION OF THE SAND FILTER LAYER
- DURING THE INSTALLATION OF THE STORMTECH ISOLATOR ROW.
  BEFORE BACKFILLING THE STORMTECH UNITS.

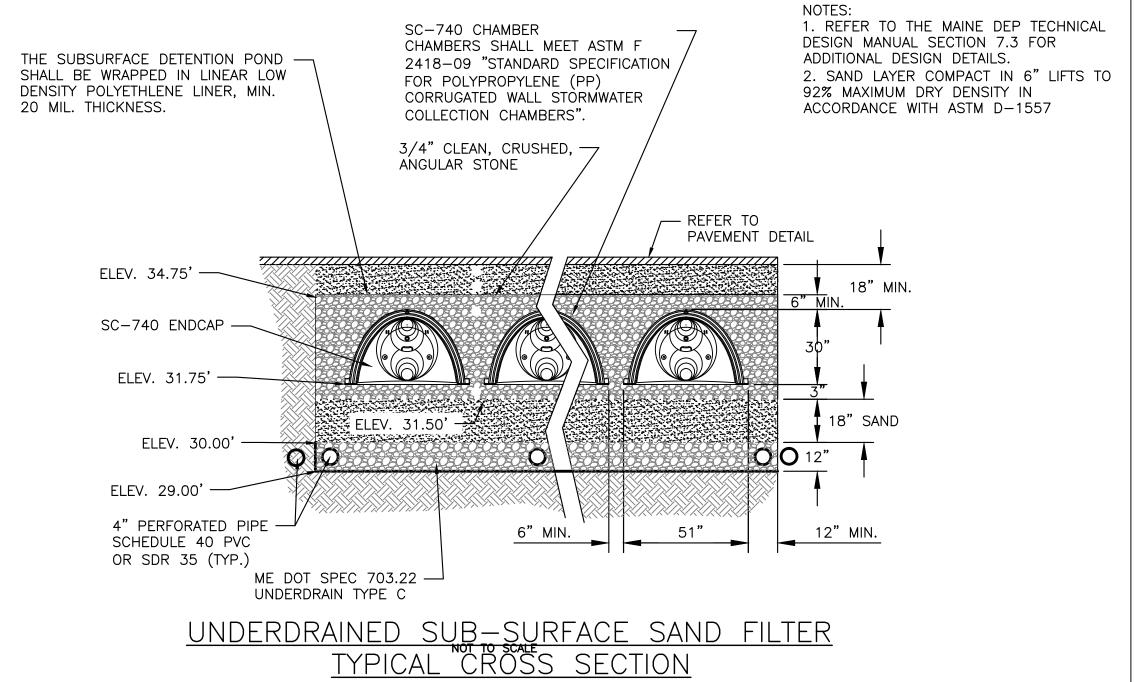

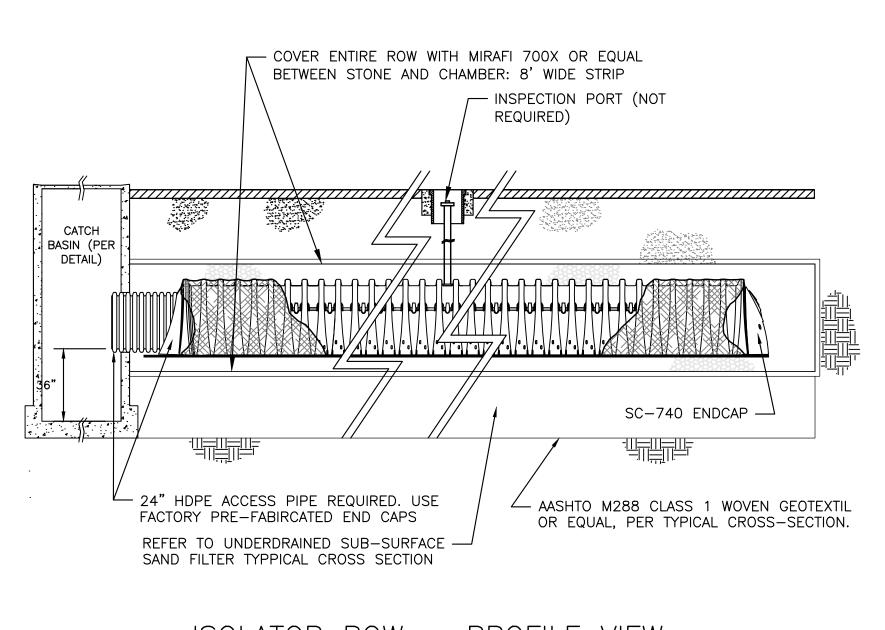

<u>ISOLATOR ROW - PROFILE VIEW</u>

NOT TO SCALE

THIS PLAN IS FOR PERMITTING AND SHALL NOT BE USED FOR CONSTRUCTION

FINAL SITE/SUB. REVISION TC DEVELOPMENT, DETAIL HARBORVIEW FILE: ACORNPLAN DATE: 6-6-11 JN: 1035 SCALE: NTS DESIGNED BY: WHS DRAWN BY: WHS CHECKED BY: HPS DRAWING NO.

C-6