

## TYPICAL ABBREVIATIONS


DN DR DS DW


0 5 CALE

	AND	DWG	DRAWING	IBC	INSTALLED BY CONTRACTOR	SAT	SUSPENDED ACOUSTICAL TILE
	ANGLE	E	EAST	IN	INCHES	SCHED	SCHEDULE
	ΔŤ	EΑ	EACH	INSUL	INSULATION	SD	STORM DRAIN
	AMERICAN DISABILITIES ACT	EJ	EXPANSION JOINT	INT	INTERIOR	SECT	SECTION
J	ADJUST OR ADJANCENT	ELEC	ELECTRIC	JŤ	JOINT	SF	SQUARE FEET
	ABOVE FINISH FLOOR	ELEV	ELEVATION	LAM	LAMINATED	SIM	SIMILAR
M	ALUMINUM	EMP	EMPLOYEE	LB	POUNDS	SP	SHELL PACKAGE
CH	ARCHITECT OR ARCHITECTURAL	ENCL	ENCL09E	<u>LF</u>	LINEAR FEET	SPEC	SPECIFICATIONS
‡	AVERAGE	ENT	ENTRY or ENTRANCE	LL	LIVE LOAD	55	STAINLESS STEEL
	BOARD	EQ	EQUAL	LWC	LIGHT WEIGHT CONCRETE	5Q	SQUARE
G	BUILDING	EQUIP	EQUIPMENT	MAX	MAXIMUM	STD	STANDARD
G	BLOCKING	EWC	ELECTRIC WATER COOLER	MECH	MECHANICAL	STL	STEEL
	BEAM	EXH	EXHAUST	MFG	MANUFACTURE		STRUCTURAL
	BOTTOM OF	EXIST	EXISTING	MH	MAN HOLE	SUSP	SUSPENDED
	CENTER LINE	EXP	EXPANSION	MIL	MILLIMETER	SYMM	SYMMETRICAL
3	CABINET	EXT	EXTERIOR	MIN	MINIMUM	<del>-</del>	THERMOSTAT
I	CEILING	FB0	FURNISHED BY OWNER	MSB	MAIN SWITCH BOARD	т ŧ В	TOP AND BOTTOM
	CLEAR	FDN	FOUNDATION	MTD	MOUNTED	TEL	TELEPHONE
	CONCRETE MASONRY UNIT	FEC	FIRE EXTINGUISHER CABINET	MTL	METAL	TGL	TEMPERED GLASS
	COUNTER	FF	FINISH FLOOR	MW	MICROWAYE	THICK	THICKNESS
	COLUMN	FFE	FINISH FLOOR ELEVATION	N	NORTH	TI	TENANT IMPROVEMENTS
	CONCRETE	FIN	FINISH	N/A	NOT APPLICABLE	Ť.O.	TOP OF
	CONTINUOUS	FIXT	FIXTURE	NAT	NATURAL	TOJ	TOP OF JOIST
	COORDINATE	FLG	FLOORING	NIC	NOT IN CONTRACT	TOS	TOP OF STEEL
₹	CORNER	FLR	FLOOR	#	NUMBER	TYP	TYPICAL
-	CARPET		FLUORESCENT	NTS	NOT TO SCALE	UL	UNDERWRITERS LABORATORIES, INC
	COLD WATER	FT	FOOT or FEET	OC	ON CENTER	UNO	UNLESS NOTED OTHERWISE
_	DOUBLE	GΑ	GAUGE	OH	OYER HEAD	VB	VINYL BASE
Ī	DEGREE	GALY	GALYANIZED	PAR	PARALLEL	VCT	VERTICAL
IJ	DOMESTIC HOT WATER	GC	GENERAL CONTRACTOR	P/C	PRECAST CONCRETE		VINYL COMPOSITE TILE
	DIAMETER	GL	GLASS	PERF	PRFERORATED	VIF	VERIFY IN FIELD
	DIMENSION	GWB	GYPSUM WALL BOARD	PERP	PERPENDICULAR	w"	WIDE or WEST
	DOWN	HGT	HEIGHT	PL	PLATE	WD	WOOD
	DOOR	HM	HOLLOW METAL	P-LAM	PLASTIC LAMINATE	WC	WATER COOLER
	DOWN SPOUT	HORIZ		PLAS	PLASTER	W/	WITH
	DISH WASHER	HR	HOUR	PLBG	PLUMBING	W/O	WITHOUT
		HVAC	HEATING, VENTILATION & AIR CONDITION	S	SOUTH	X	EXISTING
						, \	and the state of t

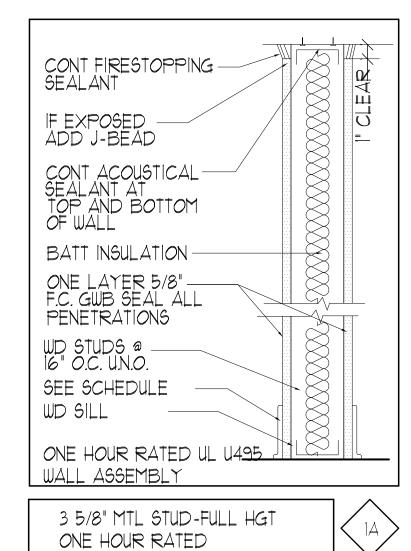

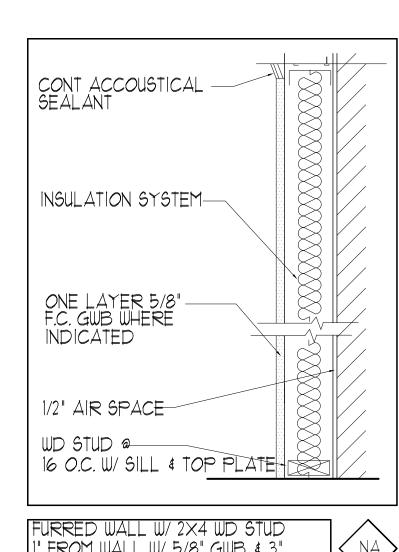


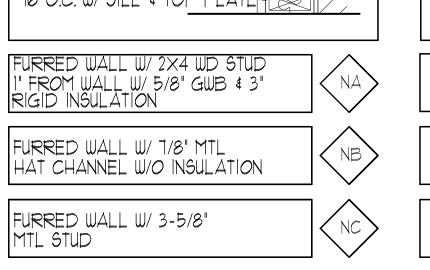

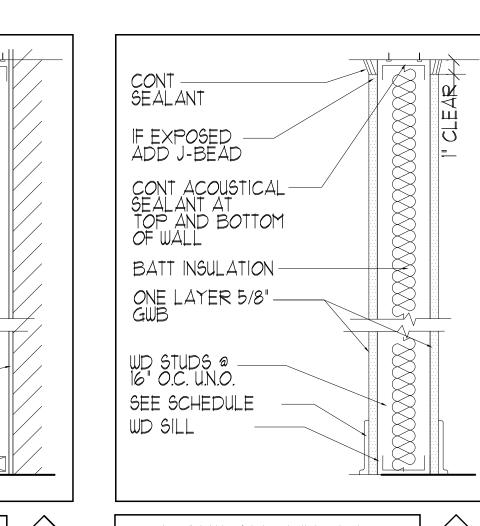

3 5/8" MTL STUD-FULL HGT NO RATING	
6" MTL STUD-FULL HGT NO RATING	AB
8" MTL STUD-FULL HGT NO RATING	AC




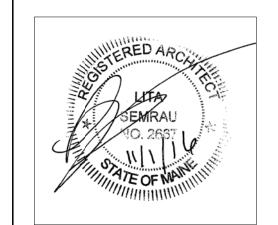

#### Consultants:



# Structural Integrity Consulting Engineers, Inc.



#### PERMIT SET 11-1-16

# NOT FOR CONSTRUCTION

### NEWPORT DEVELOPMENT ASSOCIATES

164 Middle St Portland, Maine

#	DATE	<b>.</b>	DES	CRIPTION
Date	issued	No	vember	1, 2016
Proje	ect Numba	er	1620	- Γ

### WALL TYPES

Drawn By
JP CM
TS CR
Checked By

Drawing Scale

**T1.2** 

AS NOTED