

GENERAL DEMO/RESTORATION NOTES:
 1. CLEAN AND PREP ALL LINTELS FOR PAINT
 2. CONTRACTOR TO VERIFY & REMOVE BY GRINDING OUT ANY MTL ELEMENTS EMBEDDED IN BRICK USED ON ITEMS THAT ARE BEING REMOVED & REPOINTED AS REQ'D
 3. REMOVE ALL EXISTING CAULK. OPEN JOINTS UP TO 1/2" WIDE SHALL BE RECAULKED. JOINTS LARGER THAN 1/4" WIDE TO RECEIVE EPOXY SECTION REPAIR.

RESTORATION KEY


- MORTAR SOFT OR MISSING
ACTION: CUT BACK 3/4" - (3) LIFTS 1/4" EACH (85%)
15% DEEP REPOINT W/ FINAL 3/4", (3) LIFTS
- SEE NOTE ABOVE - BACK SIDE OF SECOND STORY BRICK PARAPET
- ABANDONED METAL ELEMENTS TO BE GROUND OUT + REPOINTED AS REQ'D
- STITCH BRICK TOGETHER
-SEE STRUCTURAL

1 MARKET ST EXTERIOR ELEVATION
 SCALE: 1/4" = 1'-0"



PORT CITY ARCHITECTURE

65 NEWBURY STREET
 PORTLAND, ME 04101
 207.761.9000

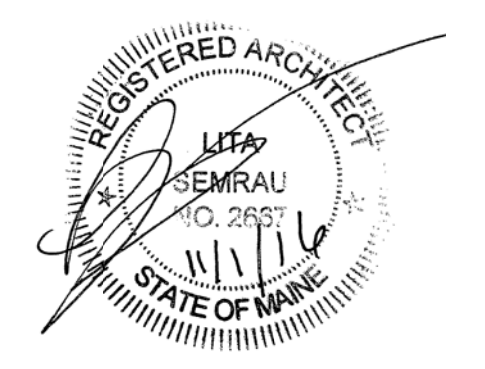

Consultants:

MECHANICAL SYSTEMS ENGINEERS, INC.
117 Forest Hill Drive, Westbrook, Maine 04092
 Tel: (207) 846-3443 • Fax: (207) 846-3443
 msengineering.com

Structural Integrity
 Consulting Engineers, Inc.

SWIFTCURRENT
 Engineering Services

PERMIT SET
 11-1-16

NOT FOR CONSTRUCTION

NEWPORT DEVELOPMENT ASSOCIATES

164 Middle St
 Portland, Maine

#	DATE	DESCRIPTION

Date Issued: November 1, 2016
 Project Number: 16201
 Drawing Scale: AS NOTED

DEMO EXTERIOR ELEVATIONS

Drawn By: JPC/TSC/CR
 Checked By: LAS
D2.3