

ENTRY NO 2
ACCESSIBLE ENTRANCE,
LOADING & CUSTOMER
PICK-UP
DESIGN LAB
BREAK ROOM

STOCK ROOM

998 SF
4 OCC

BACK OF HOUSE IS "S" OCCUPANCY REQUIRING ONLY ONE EXIT PER TABLE 1015.1, THEREFORE OPT DOES NOT APPLY UNTIL REACHING THE EXIT FROM THAT SPACE.

MANAGER'S OFFICE

76 SF
1 OCC

MEN'S
TOILET ROOM

WOMEN'S
TOILET ROOM

TOILET VESTIBULE

SERVICE ELEVATOR

EMERGENCY LIGHTING, TYP.

SALES AREA

EXIT NO. 1
86 OCCUPANTS
345 ALLOWED

6341 SF
212 OCC

ENTRY NO 1

LOFT

CASHWRAP

D1 EGRESS PLAN - FIRST FLOOR
1/8"=1'-0"

EXIT SEPARATION IN SALES:
REQ'D 55'-11" (1/3 X 167'-10")
PROVIDED 71'-0"

NOTE: SPACE IS FULLY SPRINKLERED

OCCUPANT LOAD	SF	LOAD FACTOR	OCC
FIRST FLOOR:			
SALES FLOOR AREA: (OCCUPANT LOAD FACTOR PER TABLE 1004.1.1)	6,341 / 30	=	212
STOCKROOM / MISC AREA: (OCCUPANT LOAD FACTOR PER TABLE 1004.1.1)	998 / 300	=	4
MANAGER'S OFFICE: (OCCUPANT LOAD FACTOR PER TABLE 1004.1.1)	76 / 100	=	1
TOTAL FIRST FLOOR:	7,339		216
BASEMENT:			
STOCKROOM / MISC AREA: (OCCUPANT LOAD FACTOR PER TABLE 1004.1.1)	2,869 / 300	=	10
TOTAL BASEMENT:	2,869		10
TOTAL:	10,208		226
REQUIRED RESTROOMS PER OCCUPANCY			1 PER SEX
PROVIDED RESTROOMS			1 PER SEX
EXITING	Required:	Provided:	
NUMBER OF EXITS:	2	2	
FIRST FLOOR	43.2"	171"	
BASEMENT	2"	66"	
TRAVEL DISTANCE	Required:	Provided:	
MAX TRAVEL DISTANCE:	250 FT MAX	160'-3" FT MAX	

A1 EGRESS PLAN - BASEMENT FLOOR
1/8"=1'-0"


EXIT SEPARATION IN STOCK:
REQ'D 28'-4" (1/3 X 140'-0")
PROVIDED 45'-6"

NOTE: SPACE IS FULLY SPRINKLERED

STOCKROOM 2

2,869 SF
10 OCC

EXIT CORRIDOR

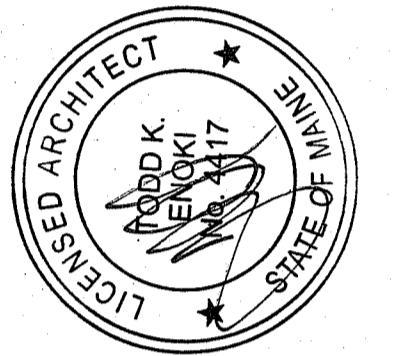

CALLISONRTKL
A DESIGN CONSULTANCY OF ARCADIS
CALLISONRTKL, INC.
www.callisonrtkl.com

west elm
Downtown Portland
164 Middle Street
Portland, ME 04101
PROJECT #006-160335-00

ISSUED / REVISED	DATE
PRELIMINARY SET	09/08/16
LL COORDINATION SET	11/08/16
LL/PERMIT SET	11/21/16

EGRESS PLANS

A-000.2