


OWNER:  
**WILLIAMS-SONOMA, INC.**  
 3250 Van Ness Avenue  
 San Francisco, CA 94109  
 T 415 616 8602  
 F 415 439 8164  
 www.williams-sonoma.com



EBA Consulting Engineers  
 6015 Vaught Ranch Road, Suite 200  
 Austin, Texas 78729-2314 USA  
 512.744.4400 main 512.744.4444 fax  
 www.eeace.com

State Registration: MAINE  
 Firm Registration No. N/A  
 EEA Project No. 20160538

DRAWN BY: ARC  
 CHECKED BY: BKK

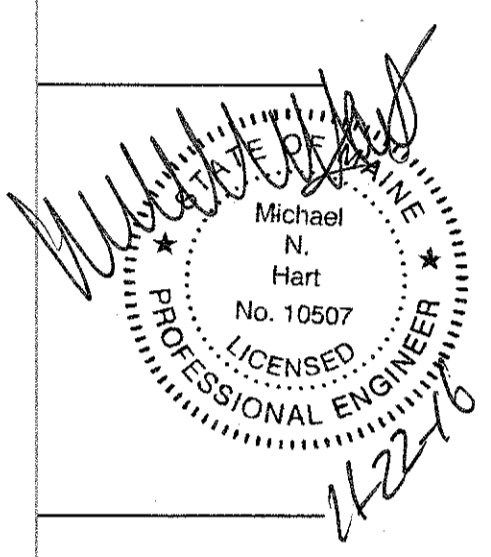

**PLUMBING SCHEDULE**

MARK	FURNISHED BY OWNER	DESCRIPTION	FIXTURE	CONNECTIONS				NOTES
				WASTE	VENT	CW	HW (MAX°F)	
P-1		WATER CLOSET (ADA)	KOHLER HIGHLINE PRESSURE LITE MODEL #K-3519 (1.0 GPF) ELONGATED BOWL, COLOR - WHITE. TRIP LEVER ON "OPEN" SIDE, PER ACCESSIBILITY CODE.	4"	2"	3/4"		1,4
P-2		LAVATORY (ADA)	KOHLER SOHO K-2084 SINGLE HOLE WALL MOUNTED w/ K-13463 (0.5 GPM) LAVATORY FAUCET WITH POLISHED CHROME.	2"	1-1/2"	1/2"	1/2" (110°F)	3,4,5,7
P-4		MOP SINK	FLORESTONE #MSR-2424; FAUCET W/INTEGRAL CHECK VALVE AND VACUUM BREAKER. GC TO PROVIDE 4' GREEN HOSE.	3"	1-1/2"	3/4"	3/4" (140°F)	4
P-5		DRINKING FOUNTAIN	HAWES MODEL #1011MS, INCLUDE #MTGFR.DF2 WITH S.S. FINISH PANEL, MOUNT PER ADA REQUIREMENTS.	1-1/2"	1-1/2"	1/2"		4
P-6	X	POINT OF USE WATER COOLER	OASIS POU1SRHS HOT N' COLD POU COOLER			1/2"		
P-7		URINAL	KOHLER FRESHMAN K-4989-T (WHITE WALL-MOUNTED URINAL WITH TOP SPUD AND MANUAL 1.0 GPF FLUSH VALVE (KOHLER K-13518). ACCESSIBLE HEIGHT. PROVIDE WALL MOUNTING BRACKETS TO SUIT)	1-1/4"	1-1/2"	3/4"		
FD		FLOOR DRAIN	JAY R. SMITH #2010-B W/CHROME PLATED STRAINER.	3"	2"	1/2"		2
TP		TRAP PRIMER	PRECISION PLUMBING PRODUCTS #P-2 UPC & ASSE LISTED			1/2"		
IMB		WATER COOLER SUPPLY BOX	WATER-TITE # 82088, ICEMAKER BOX PROVIDE CW LINE TO APPLIANCE			1/2"		
FS		FLOOR SINK	JAY R. SMITH #3140	3"	2"	1/2"		2
WHA		WATER HAMMER ARRSTOR	ZURN SHOKTROL					
FCO		FLOOR CLEAN OUT	FLOOR CLEAN OUT - ZURN #Z-1400. CAST IRON BODY WITH GAS AND WATER TIGHT ABS TAPERED THREAD PLUG AND ROUND SCORAIATED TOP ADJUSTABLE TO FINISHED FLOOR. FURNISH TOP SUITABLE FOR FINISHED FLOOR. SEE ARCHITECTURAL PLANS FOR FLOOR FINISH. ACCEPTABLE ALTERNATES, WADE OR SMITH.					
WCO		WALL CLEAN OUT	JAY R. SMITH #4532S					

NOTES:  
 1 ADA COMPLIANT HANDLE, MAX 1.0 GAL PER FLUSH WITH SLOAN FLUSHMATE, KOHLER K-4650 OPEN FRONT SEAT AND COVER. MOUNT PRE LOCAL CODE TO ACCOMMODATE HANDICAPPED USAGE.  
 2 PROVIDE TRAP PRIMER FOR EACH FLOOR DRAIN/SINK  
 3 PROVIDE OFFSET TRAP SUPPLIES AND GRID DRAIN. PROVIDE LAVATORY INSULATED "TRAP WRAP" PROTECTIVE KIT 500R BY BROCAR OR EQUAL FOR TRAP, HW AND CW SUPPLIES. ABRASIVE RESISTANT EXTERIOR COVER SHALL BE SMOOTH AND HAVE 1/8" WALL MIN. OVER CUSHIONED FOAM INSERT. FASTENERS SHALL REMAIN SUBSTANTIALLY OUT OF SIGHT. MOUNT PER LOCAL CODE TO ACCOMMODATE HANDICAPPED USAGE. ADA COMPLIANT, ADJUST HOT WATER SUPPLY TO PROVIDE 100 DEG. F. WATER TO FAUCET. COUNTER SINK FAUCET HOLES UNDER COUNTER FOR ATTACHING WASHERS AND NUTS.  
 4 PROVIDE WATER HAMMER ARRESTOR IN WATER SUPPLIES TO FIXTURE.  
 5 PROVIDE WALL CLEANOUT (WCO) IN LAV WASTE LINE.  
 6 NOT USED.  
 7 PROVIDE WITH MIXING VALVE, WATTS LFMMV- M1. MAXIMUM TEMPERATURE SET POINT SHALL NOT BE GREATER THAN 110°F.

**ELECTRIC WATER HEATER SCHEDULE**

Tag	TANK SIZE GALLONS	INPUT BTU/H	MANUFACTURER	MODEL	ELECTRICAL			NOTES
					VOLTAGE	PHASE	AMP	
WH-1	6	1500 W	A.O. SMITH	DEL-6	120	1		1, 2

NOTES:  
 1. PROVIDE THE MAKE AND MODEL SPECIFIED OR AN ENGINEER APPROVED EQUAL.  
 2. PROVIDE AND INSTALL WITH EXPANSION TANK, AMTROL THERM-X-TROL ST-SC, 2.1 GAL. TANK.

**west elm**  
 Downtown Portland  
 164 Middle Street  
 Portland, ME 04101  
 PROJECT #006-160335.00

ISSUED / REVISED	DATE
PRELIMINARY SET	09/08/16
LL COORDINATION SET	11/08/16
LL/PERMIT SET	11/21/16

SCHEDULES  
 PLUMBING  
**P-002**