

GENERAL NOTES

- A. THE ABBREVIATION G.C., WHEREVER IT APPEARS IN THESE PLUMBING DRAWINGS, SHALL REFER TO THE GENERAL CONTRACTOR.
- B. THE CONTRACTOR FOR THIS DIVISION OF WORK IS REQUIRED TO READ THE SPECIFICATIONS AND REVIEW DRAWINGS FOR ALL DIVISIONS OF WORK AND IS RESPONSIBLE FOR THE COORDINATION OF THIS WORK AND THE WORK OF ALL SUBCONTRACTORS WITH ALL DIVISIONS OF WORK. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ALL SUB-CONTRACTORS WITH A COMPLETE SET OF BID DOCUMENTS.
- C. ALL ROOF CUTTING, PATCHING AND FLASHING REQUIRED TO INSTALL THE PLUMBING SYSTEMS SHALL BE BY A LANDLORD APPROVED ROOFING CONTRACTOR. COORDINATE ROOF PENETRATIONS WITH LANDLORD AND G.C. ALL ROOF CUTTING, PATCHING AND FLASHING REQUIRED TO INSTALL THE PLUMBING SYSTEMS SHALL BE BY A LANDLORD APPROVED ROOFING CONTRACTOR. COORDINATE ROOF PENETRATIONS WITH LANDLORD AND G.C.
- D. ALL PLUMBING FIXTURES SHALL BE INSTALLED WITH STOP VALVES TO ISOLATE EACH FIXTURE. REFER TO RISER DIAGRAM AND PLUMBING SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- E. ALL SHUT-OFF VALVES LOCATED IN AREAS WITH HARD CEILINGS SHALL HAVE ACCESS PANELS INSTALLED. COORDINATE LOCATION AND TYPE WITH G.C. AND ARCHITECT.
- F. CONTRACTOR TO VERIFY THAT ALL ITEMS ON THE CONTRACTOR CHECKLIST ARE COMPLETED PRIOR TO MEP COMMISSIONING. CONTRACTOR WILL RECEIVE CONTRACTOR CHECKLIST IN ELECTRONIC FORM WITH BID DOCUMENTS.



KEYED NOTES

- 1. CONNECT NEW SANITARY LINE INTO THE LANDLORD'S EXISTING SANITARY SERVICE AS SHOWN. FIELD VERIFY EXACT LOCATION. REFER TO WASTE AND VENT RISER DIAGRAM AND PLUMBING SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- 2. EXTEND NEW VENT TO EXISTING VENT THRU ROOF. ALL ROOF WORK TO BE DONE BY A LANDLORD APPROVED ROOFING CONTRACTOR.
- 3. NOT USED.
- 4. INSTALL 1/2" WATER PIPE FROM TRAP PRIMER DOWN IN WALL UNDER FLOOR TO FLOOR DRAIN OR FLOOR SINK. TRAP PRIMER TO BE LOCATED IN AN ACCESSIBLE LOCATION WITH ACCESS PANEL.
- 5. PROVIDE WATER HEATER PER SCHEDULE. PROVIDE WITH SECONDARY DRAIN PAN. ROUTE THE RELIEF VALVE PIPING AND DRAIN PAN PIPING TO TERMINATE ABOVE THE FLOOR SINK WITH AN AIR GAP OF TWICE PIPE DIAMETER. WATER HEATER TO BE LOCATED ON PLATFORM MOUNTED ABOVE MOP SINK. COORDINATE WITH G.C. AND ARCHITECT FOR PLATFORM REQUIREMENTS.

FIRE SPRINKLER NOTE

THIS IS NOT AN ENGINEERED DRAWING. ALL FIRE PROTECTION PLANS, SPRINKLER DRAWINGS MUST BE ENGINEERED AND WET SIGNED BY A LICENSED REGISTERED FIRE PROTECTION CONTRACTOR IN THE LOCAL JURISDICTION.

SPRINKLER HEAD LEGEND		
SYMBOL	DESCRIPTION	REMARKS
⊠	EXISTING BRONZE UPRIGHT HEAD	
⊗	WHITE CONCEALED HEAD	

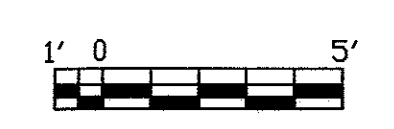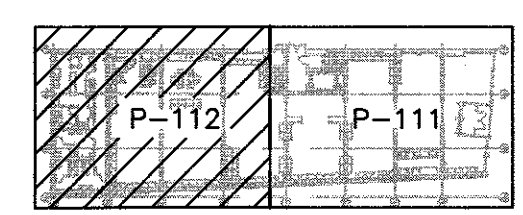

SCALE: 1/4" = 1'-0" @ FULL SIZE

OWNER:
WILLIAMS-SONOMA, INC.
 3250 Van Ness Avenue
 San Francisco, CA 94109
 T 415 616 8602
 F 415 439 8164
 www.williams-sonoma.com

EEA
 EEA Consulting Engineers
 6615 Vaught Ranch Road, Suite 200
 Austin, Texas 78726-2314 USA
 512.744.4400 main 512.744.4444 fax
 www.eeace.com

State of Registration MAINE
 Firm Registration No. N/A
 EEA Project No. 20166538
 DRAWN BY: ARC
 CHECKED BY: BKK

Professional Engineer Seal for Michael N. Hart, No. 10507, State of Maine.

west elm
 Downtown Portland
 164 Middle Street
 Portland, ME 04101
 PROJECT #006-160335.00

ISSUED / REVISED	DATE
PRELIMINARY SET	09/08/16
LL COORDINATION SET	11/08/16
LL/PERMIT SET	11/21/16

PARTIAL FIRST FLOOR PLUMBING PLAN

P-112