

**FOUNDATION PLAN**  
 1/4"=1'-0"

TOP OF CONCRETE WALL ELEV. NOTED (XX'-X").

TOP OF CONCRETE WALL AT SLAB SHELF AND DOOR BONDOUTS = 97'-3 1/2" UNLESS NOTED.

BOTTOM OF FOOTING ELEV. NOTED B/FTG = XX'-X". FOOTINGS STEPS MAY BE RELOCATED AS DETERMINED BY CONTRACTOR AS LONG AS A MINIMUM OF 4'-0" FROM BOTTOM OF FOOTING TO FINISHED GRADE IS MAINTAINED.

TOP OF SLAB ELEV. VARIES - SEE PLAN.


DIMENSIONS NOTED \* MUST BE VERIFIED WITH LIFT REQUIREMENTS.

SLAB IS 4" THICK FIBER-REINFORCED CONCRETE OVERLAYING A VAPOR BARRIER ON RIGID INSULATION OVER AN 8" LAYER OF 3/4" GRAVEL.

..... INDICATES SAW-CUT CONTROL JOINT.

COORDINATE DOOR BONDOUT SIZES AND LOCATIONS WITH ARCHITECTURAL DRAWINGS AND DOOR SUPPLIER REQUIREMENTS.

SEE S0.01 FOR FOOTING FOOTING AND COLUMN SCHEDULES.

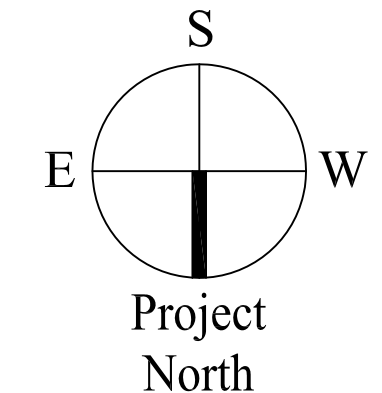

Revisions: Issued for Foundation Permit 03/21/16	Date: 21 MAR 2016	Scale: 1/4"=1'-0"	<b>FOUNDATION PLAN</b>
Project: <b>WEST PORT LOFTS CONDOMINIUM</b> 22-28 Tate Street Portland, Maine			Architect: <b>ARCHETYPE architects</b> 48 Union Wharf Portland, Maine 04101 (207) 772-6022 Fax (207) 772-4056
Consulting Engineer: <b>STRUCTURAL DESIGN CONSULTING</b> 2696 Lake Shore Road Unit 130 Glenis 03249 Tel 603.293.8038			Prepared For: <b>TATE STREET PARTNERSHIP, LLC</b> 17 Chestnut Street Portland, Maine 04101
S1.01			