

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 164 Middle St		Owner: 164 Realty, Inc.		Phone:		Permit No: 780261	
Owner Address:		Lessee/Buyer's Name: The Big Easy		Phone:		BusinessName:	
Contractor Name: Dobson Construction		Address: 78 Bailey Ave Portland, ME 04103		Phone: 878-0008		Permit Issued: MAR 24 1998	
Past Use: Bar		Proposed Use: Same		COST OF WORK: \$ 15,000.00		PERMIT FEE: \$ 95.00	
				FIRE DEPT. <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group: Type:	
				Signature: <i>[Signature]</i>		Signature: <i>[Signature]</i>	
Proposed Project Description: Make Interior Renovations				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)			
				Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied			
				Signature:		Date:	
Permit Taken By: Mary Gresik		Date Applied For: 10 March 1998					

PERMIT ISSUED
MAR 24 1998
CITY OF PORTLAND

Zone: B-3 CBL: 029-0-002

Zoning Approval: *[Signature]* 3/23/98

Special Zone or Reviews:

Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: *[Signature]*

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

[Signature]
SIGNATURE OF APPLICANT **Scott Dobson** ADDRESS: DATE: 17 1998 PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT **2**

COMMENTS

3/24/98 Work started before issuance of permit. And much of it was wrong. Also amendments must be filed to accommodate changes in original plan. AR
4/3/98 w/ Scott Dobson, Wayne the plumber re. work which had to be redone, AR
7/21/98 Completed AR

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

COMMENTS

3/24/98 Work started before issuance of permit. And much of it was wrong. Also amendments must be filed to accommodate changes in original plan. AR

4/3/98 w/ Scott Dobson, Wayne the plumber re work which had to be redone, AR

7/21/98 Completed AR

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

BUILDING PERMIT REPORT

DATE: march 23, 98 ADDRESS: 164 Middle St, 029-0-002
REASON FOR PERMIT: Interior renovations
BUILDING OWNER: 164 REALTY
CONTRACTOR: Dobson Const
PERMIT APPLICANT: Scott Dobson
USE GROUP A-3 BOCA 1996 CONSTRUCTION TYPE 2B

CONDITION(S) OF APPROVAL

This Permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: *1, *8, *9, *10, *12, *18, *19, *20, *24, *26, *29, *30


1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".
9. Headroom in habitable space is a minimum of 7'6".
10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor: All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
14. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):


- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
- X-24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- X-26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
- 28. Please read and implement the attached Land Use-Zoning report requirements.
- X-29. Separate permit will be required for signage.
- X-30. This permit is for interior work only - any exterior work will require Historic Preservation review.
- 31. _____
- 32. _____


P. Samuel Hottises, Code Enforcement

cc: Lt. McDougall, PFD
Marge Schmuckal

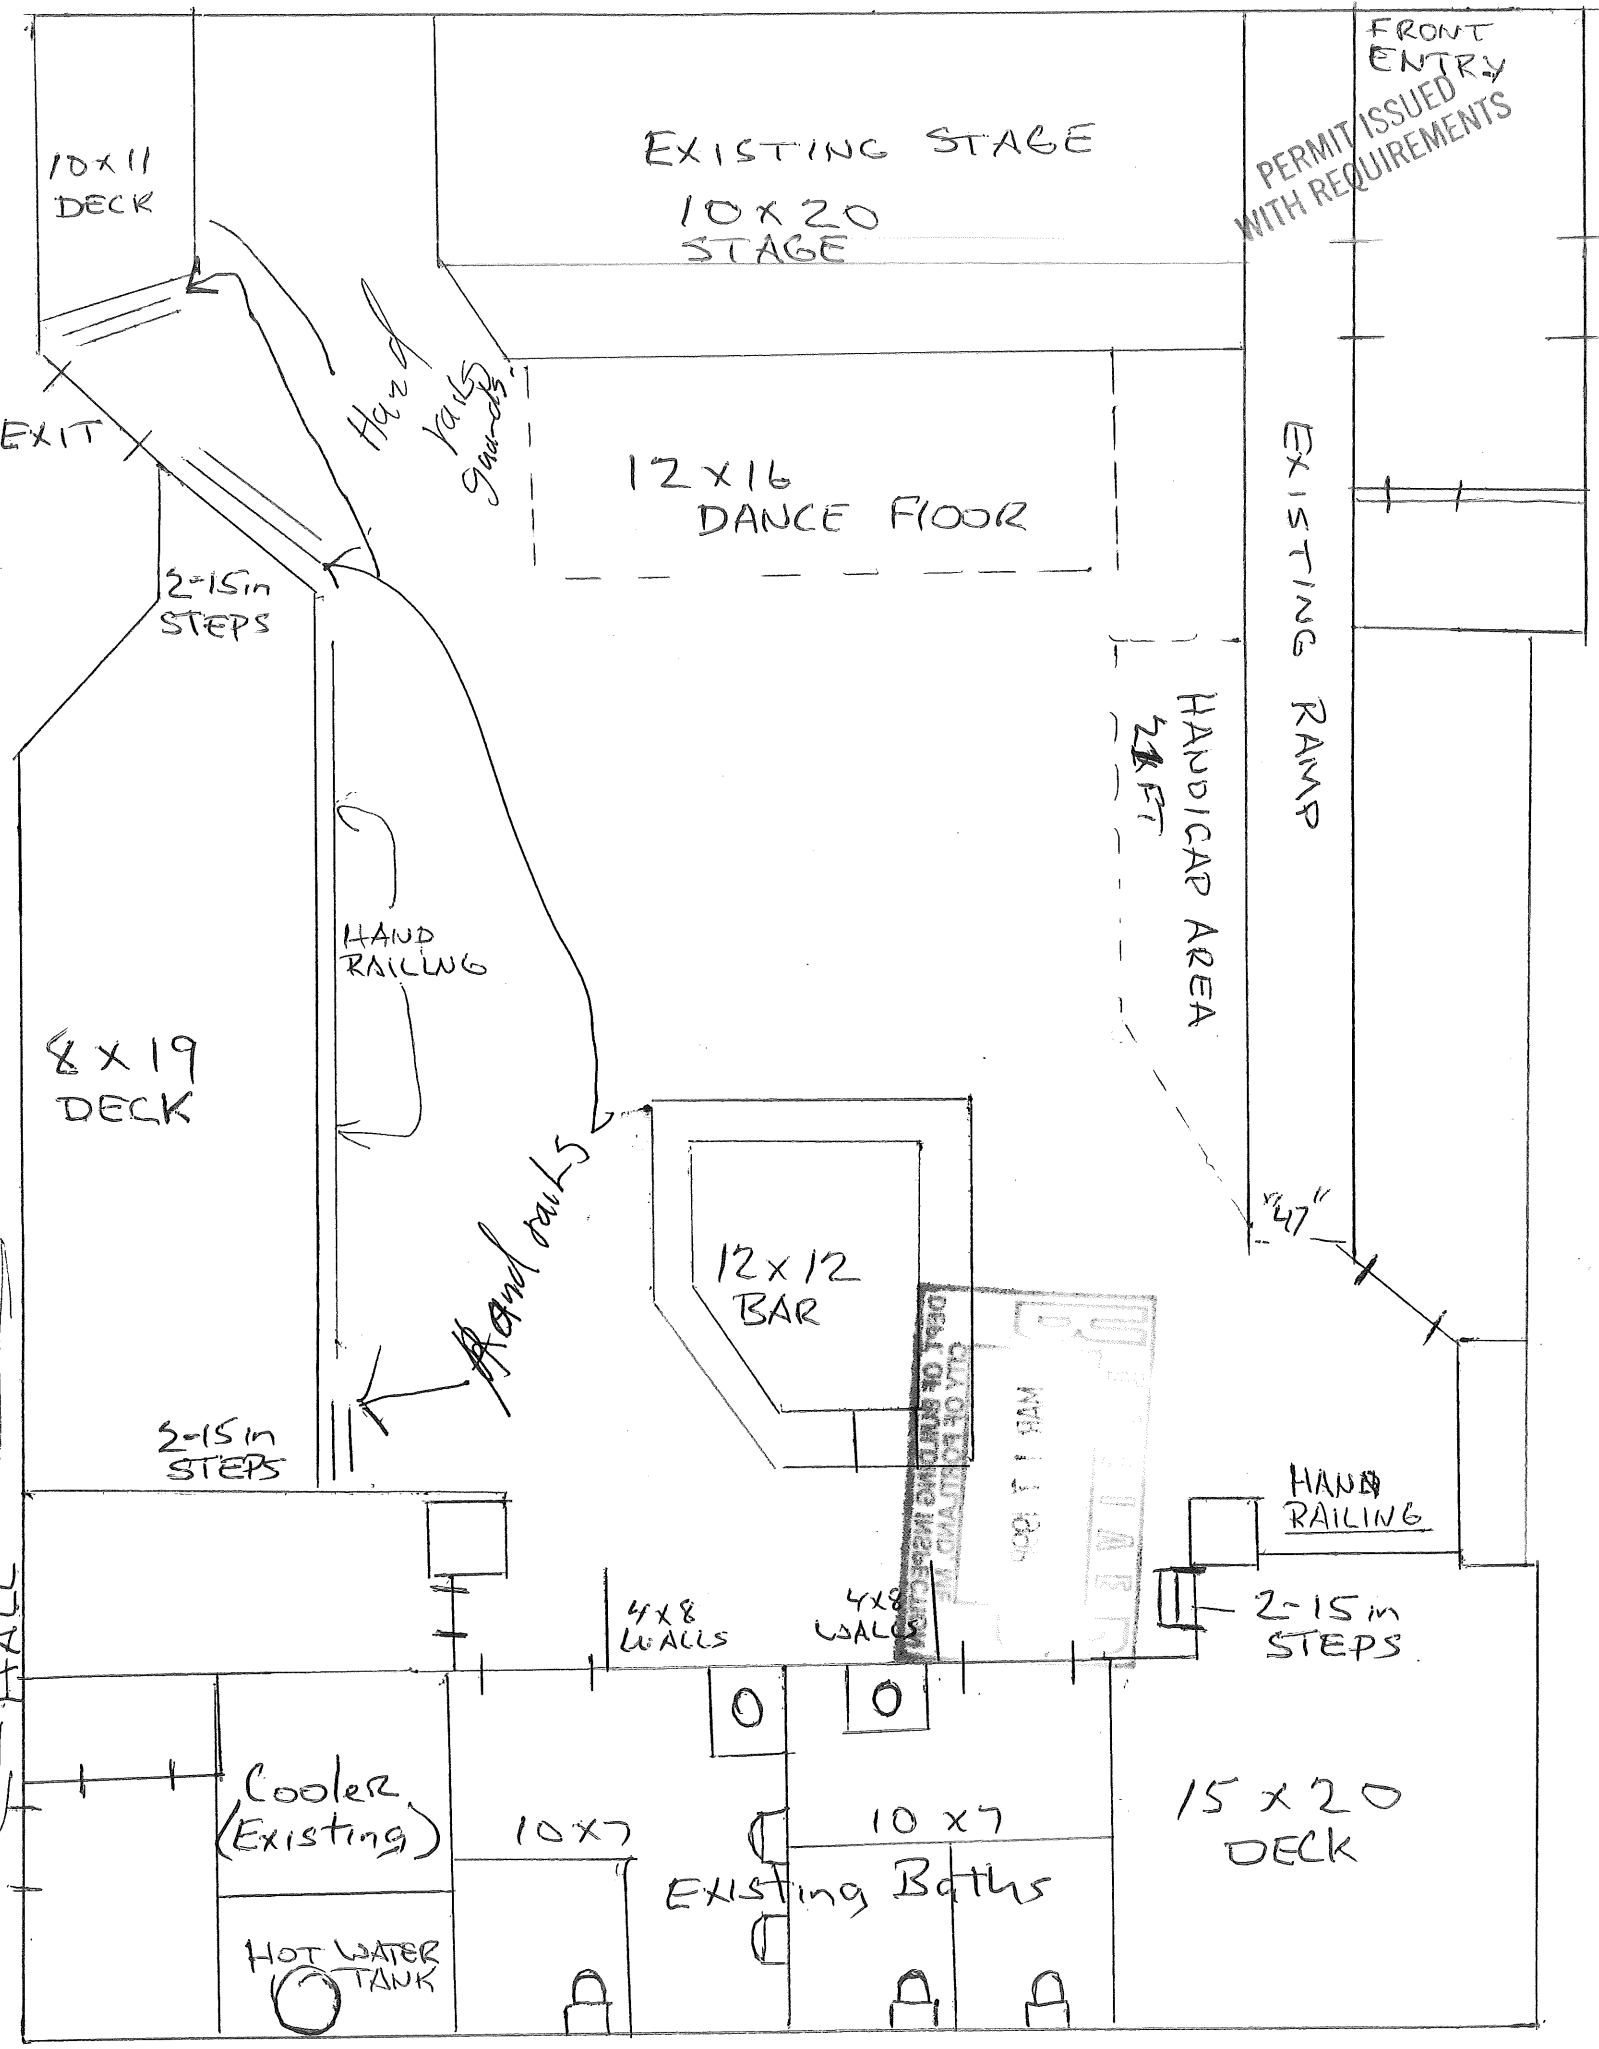

DOBSON CONSTRUCTION

78 Bailey Ave

Portland, ME 04103

Tel: (207) 878-0008

Tax I.D. # 01-0478265

March 17, 1998

PERMIT ISSUED
WITH REQUIREMENTS

City of Portland
City Hall
Congress Street
Portland, ME 04101

To Whom It May Concern,

Enclosed you will find drawings for the proposed reconstruction of the new Big Easy. This reconstruction will consist of removing the existing bar, and replacing it with a 12' X 12' U shaped type bar. In addition, there will be 3 platforms; one measuring 15' X 20' X 28" high, another being 8' X 19' X 24" high and the third being 10' X 11' X 24" high. All hand railings and stairs will meet BOCA National codes.

We will be adding 3' to the existing stage area which measures 10' X 20'. Directly in front of the stage we will construct an oak 12' X 16' dance floor. The remainder of the floor will be 1' X 1' VCT.

Existing restrooms will only be refaced with new fixtures, toilets, sinks, urinals, etc. No changes will be made to current restroom plumbing.

All electrical will be brought up to code. Fire sprinklers will be checked and serviced.

Thank you for your anticipated cooperation in this matter.

Regards,

Scott B. Dobson
General Contractor

DOBSON CONSTRUCTION
78 BAILEY AVE
PORTLAND, ME 04103
TEL: (207) 878-0008
FAX: (207) 878-0009