




UL-762 EXHAUST FAN

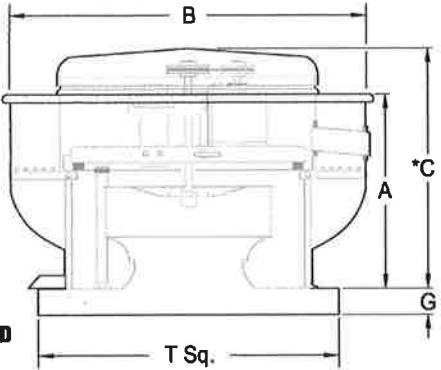

* MAY BE GREATER DEPENDING ON MOTOR.

STANDARD FEATURES: All Aluminum Housing • Backward Inclined Wheel • Top Cap with Stainless Steel Fasteners • One Piece Wind Band Continuously Welded to The Curb Cap • Prepunched Mounting Holes • Drain Trough • Internal Conduit Chase • Lifting Points • Permanently Lubricated Ball Bearing Motors • Static Resistant Belts • Adjustable Pitch Drives • Bearings Rated at 500,000 Hour Average Life • Motors Matched to Fan Load Mounted Out of Airstream • NEMA-1 Disconnect Switch

FAN DIMENSIONAL DATA						CURB SIZE	
MODEL	A	B	C	G	T SQ.	H	I
180	21"	35-3/8"	28-5/16"	1-3/4"	30"	29"	29"

FANS 1 And 2 For Hood: 1 SECTIONS: 1 & 2

QUAN	MODEL	CFMS	S.P.	H.P.	VOLTAGE	PHASE	AMPS	WEIGHT
2	XRUB-180-15	3947	1.000	1 1/2	230	1	10.00	126

OPTIONS
 29X29X22 Sloped Roof Curb Need Slope