MEYERZDESIGN

MEYER DESIGN, INC. • MEYER ARCHITECTS, INC.

227 EAST LANCASTER AVENUE • ARDMORE, PA 19003-2304 VOICE • 610.649.8500 FAX • 610.649.8509 E-MAIL • info @ meyerdesigninc.com

© 2013 MEYER DESIGN, INC. MEYER ARCHITECTS, INC. ALL RIGHTS RESERVED.

DRAWING INDEX

JANNEY MONTGOMERY SCOTT

50 PORTLAND PIER #300 PORTLAND, ME, 04101 **CUMBERLAND COUNTY**

15016

OWNER / CONSULTANTS

ESTIMATOR

BUILDING REP. ATLANTIC NATIONAL TRUST 50 PORTLAND PIER, SUITE 400 PORTLAND, ME 04101 **CONTACT: JAMES M. HANLEY** VOICE: 207.553,2000 EXT208 FAX: 207.828.1048

LANDRY/ FRENCH CONSTRUCTION COMPANY 160 PLEASANT HILL ROAD SCARBOROUGH, ME 04074 CONTACT: IAN McCRACKEN VOICE: 207.400.6500 FAX: 207.730.5567

E-MAIL: JHANLEY@ATLANTICNATIONALTRUST.COM E-MAIL: IMCRACKEN@LANDRYFRENCH.COM PROJECT ARCHITECT MEYER ARCHITECTS, INC. 227 E. LANCASTER AVENUE ARDMORE, PA 19003

CONTACT: GEORGE WILSON VOICE: 610.649.8500 FAX: 610.649.8509 E-MAIL: GWILSON@MEYERDESIGNINC.COM INTERIOR DESIGNER MEYER DESIGN INC. 227 E. LANCASTER AVENUE ARDMORE, PA 19003 CONTACT: KATE FOX VOICE: 610.649.8500

E-MAIL: KFOX@MEYERDESIGNINC.COM

FAX: 610.649.8509

2. 4 STORIES - 4.019 SO/FT

VERTICAL EXITS/STAIRS

ROOMS/ENCLOSED SPACES

EXIT CORRIDORS


GENERAL REQUIREMENTS

ISSUED FOR **DRAWINGS** COVERSHEET CONSTRUCTION PLAN & FINISH PLAN **ELECTRICAL PLAN & REFLECTIVE CEILING PLAN** OWNER'S REPRESENTATIVE:

THESE DRAWINGS TOGETHER ALONG WITH ALL SPECIFICATIONS ARE TO BE CONSIDERED AS THE

TYPICAL DEVICE MOUNTING HEIGHTS

COMPLETE AND INSEPARABLE SET

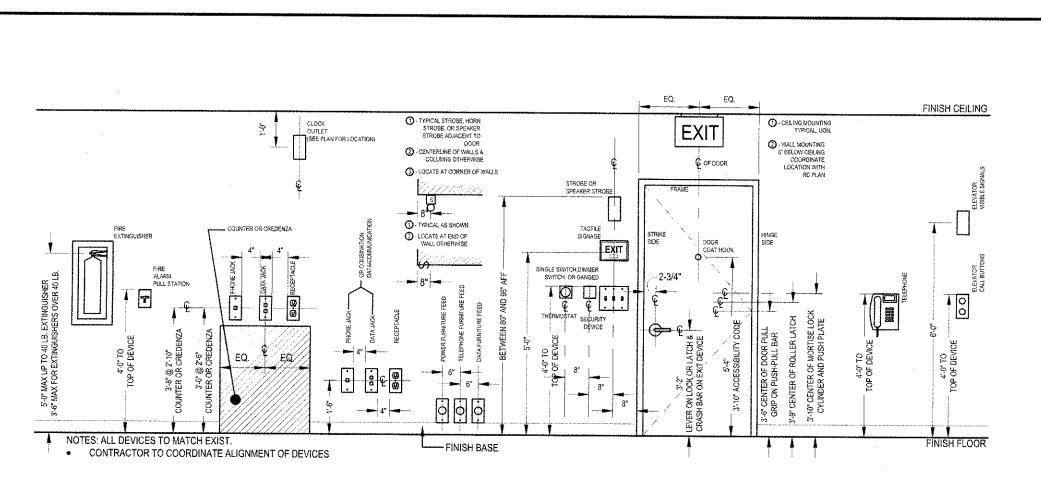

THE FOLLOWING SPECIFICATIONS AND DRAWINGS CONSTITUTE THE CONSTRUCTION CONTRACT DOCUMENTS FOR ALL REFERENCE HEREAFTER MADE TO THE TENANT SHALL INDICATE:

PHILADELPHIA, PA 19103 JEFF MALINOSKI

ALL REFERENCE HEREAFTER MADE TO THE OWNER SHALL INDICATE:

50 PORTLAND PIER, SUITE 400 PORTLAND, ME 04101

JAMES M. HANLEY ALL REFERENCES MADE TO "MEYER" SHALL INDICATE:

227 E. LANCASTER AVENUE

PROJECT MANAGER: KAREN PALECKO-BATES

GENERAL REQUIREMENTS

- ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH AIA DOCUMENT A201, "GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION," WHICH IS IN TOTAL TO BE CONSIDERED A PART OF THESE SPECIFICATIONS WITH THE 1.1.1. MEYER DESIGN INC. HAS PERFORMED THE WORK AND PRODUCED THE CONTRCT DOCUMENTS IN ASSOCIATION
- THE TERM "CONTRACTOR," WHEN USED ALONE, HEREIN REFERS IN ALL CASES TO THE GENERAL CONTRACTOR. THE TERM "MEYER" ALWAYS REFERS TO MEYER DESIGN, INC., 227 E. LANCASTER AVENUE, ARDMORE, PA 19003.
- ALL MEYER DRAWINGS AND SPECIFICATIONS ARE COMPLEMENTARY, AND WHAT IS CALLED FOR BY EITHER WILL BE BINDING AS IF CALLED FOR BY ALL. ANY WORK SHOWN OR REFERRED TO ON ANY ONE SET OF DRAWINGS SHALL BE PROVIDED AS THOUGH
- THE CONTRACTOR SHALL NOTIFY MEYER IMMEDIATELY IF HE CANNOT COMPLY WITH ALL NOTES CALLED FOR ON THIS SHEET AND/OR ALL OTHER MEYER DRAWINGS.
- PRIOR TO THE SUBMISSION OF ANY PROPOSAL, THE CONTRACTOR SHALL INSPECT THE SITE TO DETERMINE THE EXTENT OF

DO NOT SCALE DRAWINGS. VERIFY ALL DIMENSIONS. THE CONTRACTOR SHALL NOTIFY MEYER OF ANY DISCREPANCIES

BETWEEN DRAWINGS, THESE NOTES, DIMENSIONS AND FIELD CONDITIONS BEFORE COMMENCING ANY WORK, AND REQUEST

- 1.7. THE CONTRACTOR SHALL FURNISH FIELD PROGRESS SCHEDULES TO MEYER, OWNER AND TENANT FOR ALL PHASES OF WORK.
- 1.8. THE USE OF WORDS "PROVIDE" OR "PROVIDED" IN CONNECTION WITH ANY ITEM SPECIFIED IS INTENDED TO MEAN, UNLESS OTHERWISE NOTED, THAT SUCH ITEMS SHALL BE FURNISHED AND INSTALLED, AND CONNECTED WHERE SO REQUIRED.
- CONTRACTOR SHALL PERFORM ALL WORK IN COMPLIANCE WITH ANY AND ALL APPLICABLE ADA REGULATIONS, CITY, STATE, AND FEDERAL BUILDING AND LIFE SAFETY CODES, INCLUDING: 1.9.1. THE LATEST EDITION OF THE INTERNATIONAL CODE COUNCIL'S IBC 2009 (BUILDING CODE) INCLUDING LATEST
 - 1.9.2. ALL OTHER CODES AND ORDINANCES OF THE STATE OF MAINE, COUNTY OR TOWNSHIP THAT PERTAINS TO THE 1.9.3. ALL WORK PERFORMED AND ALL MATERIAL SUPPLIED SHALL BE IN ACCORDANCE WITH ALL RULES, REGULATIONS

AND ORDINANCES OF THE VARIOUS BUREAUS HAVING JURISDICTION, INCLUDING THE FIRE UNDERWRITERS AND,

- WHERE APPLICABLE, THE LATEST EDITION OF THE AMERICAN SOCIETY OF HEATING, REFRIGERATION AND AIR CONDITIONING MANUAL, THE NATIONAL ELECTRICAL CODE, THE SHEET METAL AND AIR CONDITIONING CONTRACTOR'S NATIONAL ASSOCIATION MANUAL APPLICABLE UTILITY REQUIREMENTS. 1.9.4. ANY WORK SHOWN ON THE DRAWINGS OR DESCRIBED TO BE INSTALLED ARE SUBJECT TO THE LAWS. ORDINANCES, OR REGULATIONS OF ANY OF THE AUTHORITIES HAVING JURISDICTION. ANY NEW WORK NOT INSTALLED AS PER RELEVANT CODES ADN REGULATIONS SHALL BE MODIFIED TO BRING IT INTO CONFORMITY WITH THESE LAWS,
- 1.10. ALL MATERIALS, ITEMS AND FIXTURES SHALL BE INSTALLED IN A WORKMANLIKE MANNER IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND INDUSTRY STANDARDS.

ORDINANCES AND REGULATIONS, WITHOUT ADDITIONAL COST TO THE OWNER/TENANT.

- 1.11. MEYER WILL NOT ACCEPT ANY VARIATION IN MATERIALS OR METHODS OF CONSTRUCTION WITHOUT PRIOR APPROVAL, ALL ITEMS "APPROVED EQUAL" MUST FIRST BE APPROVED BY MEYER PRIOR TO PURCHASE. WHERE THE TERM "APPROVED EQUAL OR OTHER GENERAL TERMS ARE USED, IT SHALL BE UNDERSTOOD THAT REFERENCE IS MADE TO THE RULING AND JUDGMENT OF MEYER. SUBSTITUTIONS FOR MATERIALS SPECIFIED ON THE CONSTRUCTION DOCUMENTS SHALL NOT BE ALLOWED WITHOUT APPROVAL FROM MEYER.
- 1.12. THE CONTRACTOR MUST NOTIFY MEYER OF ALL LONG-LEAD ITEMS WITHIN 2 WEEKS OF AWARD OF CONTRACT FOR DISCUSSION AND COORDINATION WITH THE OWNER AND TENANT.
- 1.13. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF MATERIALS WHICH ARE RELATED TO THE BASE BUILDING, OR OTHER TENANT SPACES WITH THE BUILDING MANAGER.
- 1.14. THE CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF ALL BUILDING SERVICES, TEMPORARY FIRE PROTECTION, TRASH REMOVAL, AND COMPLIANCE WITH CONSTRUCTION REGULATIONS. CONTRACTOR SHALL COMPLY WITH THE RULES OF THE BUILDING AS TO THE HOURS OF AVAILABILITY OF BUILDING ELEVATORS AND MANNER OF HANDLING MATERIALS. EQUIPMENT AND DEBRIS TO AVOID CONFLICT OR INTERFERENCE WITH THE NORMAL BUILDING OPERATIONS. CONTRACTOR TO THOROUGHLY CLEAN ALL NEW WORK PRIOR TO TURNING OVER SPACE TO TENANT.
- 1.15. CONTRACTOR TO THOROUGHLY CLEAN ALL NEW WORK PRIOR TO TURNING OVER SPACE TO TENANT.
- 1.16. CONTRACTOR SHALL PROVIDE CUTS, SAMPLES AND/OR SHOP DRAWINGS INCLUDING, BUT NOT LIMITED TO THE FOLLOWING ITEMS. ALL CUTS SHALL BE SUBMITTED TO MEYER NO LATER THAN TWO (2) WEEKS AFTER AWARD OF THE CONTRACT UNLESS NOTED OTHERWISE. SUBMITTED INFORMATION IS FOR MEYER REVIEW AND APPROVAL. PRIOR TO THE PURCHASE AND INSTALLATION OF ITEMS. IF THE SUBMITTAL OR SHOP DRAWING PROCESS IS OMITTED, GC ASSUMES RESPONSIBILITY FOR THE

<u>APLES</u>	CUTS	SHOP DRAWINGS
TED/TREATED GLASS OD MILLWORK/VENEER NT COLORS ON DRYWALL IN ON APPROPRIATE WOOD RBLE/GRANITE ORING MATERIALS LL COVERING (VINYL) LL COVERING (FABRIC) CK-UP W/SEAM SAMPLE FOR ORING (CPT) AND WALLCOVERING	PLUMBING FIXTURES LIGHTING FIXTURES HARDWARE/DOOR SCHEDULES WOOD FLOORING SUPPLY AND/OR RETURN REGISTERS DRINKING FOUNTAINS APPLIANCES KITCHEN CABINETS EXIT SIGNS EMERGENCY LIGHTING	MILLWORK CARPET SEAMING DIAGRAI SIGNAGE COORDINATED REFLECTED PLANS; INCLUDING LIGHT I HVAC, SPRINKLER, GRILLE ELECTRIC AND TELEPHONE PANEL LOCATIONS

ALL DIMENSIONS ARE TAKEN TO FINISHED FACE OF PARTITIONS, UNLESS OTHERWISE NOTED. ALL PARTITIONS ABUTTING MULLIONS OR COLUMNS AT EXTERIOR WALL SHALL BE ON CENTERLINE OF MULLION OR COLUMN, UNLESS OTHERWISE STATED. 1.18. WHERE EXISTING CONDITIONS ARE DISRUPTED BY CONSTRUCTION OR WHERE NEW WORK JOINS EXISTING, ALL WORK IS TO BE CAREFULLY INTEGRATED TO MAKE A FINISHED, MONOLITHIC JOB. MATCH EXISTING WHERE REQUIRED. PROTECT EXISTING

PRIOR TO TURNING SPACE OVER TO THE OWNER.

TOILET ROOM ACCESSORIES

1.19 CONTRACTOR TO PROVIDE EACH TRADE WITH COMPLETE SET OF PLANS. THESE MUST ALWAYS BE USED AS A COMPLETE SET, DO NOT DISTRIBUTE SEPARATE SHEETS. IF GC DOES NOT DISTRIBUTE FULL SET THEY ASSUME FULL RESPONSIBILITY FOR

WORK THROUGHOUT THE PERIOD OF CONSTRUCTION. CONTRACTOR TO THOROUGHLY CLEAN ALL EXISTING AND NEW WORK

- 1.20. ALL DETAIL DIMENSIONS, FINISHES AND MISCELLANEOUS ITEMS SHALL BE "BUILDING STANDARD" UNLESS OTHERWISE INDICATED. "BUILDING STANDARD" REFERS BOTH TO THE QUALITY OF THE BUILDING MATERIALS AND TO THEIR METHOD OF INSTALLATION. ALL ITEMS REFERRED TO AS "BUILDING STANDARD" OR "STANDARD" SHALL MEET THESE CRITERIA UNLESS
- 1.21. ALL NOTED DIMENSIONS FOR OUTLET AND FIXTURE LOCATIONS ARE CRITICAL, ACCURACY TO WITHIN 1° IS REQUIRED. ANY PROBLEM MEETING THESE DIMENSION REQUIREMENTS SHALL BE BROUGHT TO THE ATTENTION OF MEYER PRIOR TO THE COMMENCEMENT OF WORK. APPROVAL MUST BE OBTAINED IN WRITING FROM MEYER FOR ANY DIMENSIONAL DEVIATION
- 1.22. IMMEDIATELY UPON AWARD OF CONTRACT, GENERAL CONTRACTOR SHALL CHECK CURRENT STOCK OF ALL ITEMS, INCLUDING BUT NOT LIMITED TO: CARPET, WALL COVERING, AND LAMINATE. CONTRACTOR SHALL PROVIDE TO MEYER AND/OR CLIENT VERIFICATION OF PURCHASE OF MATERIALS WITHIN TWO WEEKS TO ENSURE A TIMELY INSTALLATION. IF, AT THIS TIME, SPECIFIED ITEMS ARE OUT OF STOCK OR DISCONTINUED, CONTRACTOR SHALL PROVIDE MEYER AND/OR CLIENT A MINIMUM OF 2 SELECTIONS OF SUBSTITUTES.
- 1.23. A SCHEDULE FOR ALL WORK SHALL BE PROVIDED ALONG WITH THE COST ESTIMATES. A COPY OF THE SCHEDULEAND COST ESTIMATES SHALL BE SENT TO MEYER AND OWNER.
- 1.24. THE CONTRACTOR SHALL PROVIDE THE MANUFACTURER'S RECOMMENDED MAINTENANCE SCHEDULE AND/OR PROGRAM FOR EACH SPECIFIED PIECE OF EQUIPMENT, APPLIANCE AND/OR FINISH MATERIAL, INCLUDING REFERENCE TO TYPE OF CLEANING EQUIPMENT TO BE USED TO THE OWNER. INCLUDE ALL WARRANTIES, GUARANTEES AND INSTRUCTION MANUALS.
- 1.25. BY PERFORMING WORK UNDER THIS CONTRACT, THE CONTRACTOR AGREES TO GUARANTEE ALL WORK AND EQUIPMENT PROVIDED BY HIM OR HIS SUBCONTRACTORS AGAINST DEFECTIVE MATERIAL AND WORKMANSHIP FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. IF SPECIFICATIONS PROVIDE FOR ANY OTHER ADDITIONAL GUARANTEE, SUCH GUARANTEE SHALL BE INCLUDED IN A WRITTEN STATEMENT. UPON RECEIPT OF NOTICE FROM THE TENANT, AND AT NO EXPENSE TO THE TENANT, THE CONTRACTOR SHALL PROMPTLY COMPLY WITH THE PROVISIONS OF SUCH GUARANTEES.
- 1.26. UPON COMPLETION OF THE PROJECT, CONTRACTOR SHALL DELIVER TO MEYER AND TO THE TENANT "AS-BUILT" DRAWINGS. THESE DRAWINGS SHALL INCLUDE ANY REVISIONS TO THE STRUCTURAL, ELECTRICAL AND AIR DISTRIBUTION SYSTEMS. "AS-BUILTS" SHALL CONSIST OF A NEATLY MARKED UP SET OF BLACK-LINE PRINTS.
- 1.27. THE CONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS AND CERTIFICATES, AS REQUIRED BY THE LOCAL AND STATE LAWS AND FIRE UNDERWRITERS' CERTIFICATE OF INSPECTION, AND BE RESPONSIBLE FOR OBTAINING A CERTIFICATE OF

1.28 THE CONTRACTOR SHALL PROVIDE PROOF OF PAYMENT TO ALL SUBCONTRACTORS, MATERIALS, AGENTS, ETC. TO THE

- OWNER SO AS NOT TO INCUR LIENS AGAINST THE OWNER OF HIS PREMISES. 1.29. THE LANDLORD/TENANT AND THE CONTRACTOR SHALL PROVIDE ADEQUATE INSURANCE FOR THE PROJECT DURING THE PERIOD OF CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE PUBLIC LIABILITY INSURANCE, GENERAL LIABILITY INSURANCE, BODILY INJURY, PROPERTY DAMAGE INCLUDING AUTOMOBILE, THEFT AND VANDALISM, AND BUILDING RISK INSURANCE, AT ALL TIMES UNTIL FINAL ACCEPTANCE OF THE WORK.
- 1.30. THE CONTRACTOR SHALL ADVISE THE UTILITY COMPANY OF THE PROPOSED LOAD IMMEDIATELY AFTER BEING AWARDED THE CONTRACT. ALL EQUIPMENT MUST BE APPROVED BY THE UTILITY COMPANY HAVING JURISDICTION. ALL DETAILS OF SERVICE INCLUDING INSTALLATION SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE UTILITY COMPANY. THIS INCLUDES ALL ITEMS SUCH AS DISCONNECT SWITCHES, RECEPTACLES, VALVES, UNION AND OTHER APPURTENANCE
- 1.31. CONTRACTOR TO REFER TO BASE BUILDING ARCHITECTURAL DRAWINGS, FOR BASE BUILDING ELECTRICAL, HVAC, SPRINKLER, MECHANICAL AND PLUMBING INFORMATION.
- 1.32. CONTRACTOR IS TO COMPLETE A PRELIMINARY PUNCH LIST CERTIFYING COMPLETION OF WORK AND COMPLIANCE WITH DOCUMENTS. ALL EXCEPTIONS ARE TO BE NOTED ON THIS PUNCH LIST, PUNCHLIST TO BE DISTRIBUTED TO MEYER AND
- WORKING ON THE PROJECT, INCLUDING PHONE NUMBERS AND CONTACT NAME. 1.34. SUBCONTRACTORS TO DIRECT ALL QUESTIONS AND INQUIRES THROUGH THE GENERAL CONTRACTOR. DURING THE

1.33. UPON AWARD OF THE CONTRACT, THE GENERAL CONTRACTOR IS TO PROVIDE A COMPLETE LIST OF SUBCONTRACTORS

- BIDDING PROCESS, ALL QUESTIONS AND CLARIFICATIONS SHOULD BE MADE BY THE GENERAL CONTRACTOR TO THE OWNER'S REP AND/OR MEYER. NO PHONE CALLS SHALL BE MADE DIRECTLY TO THE TENANT, UNLESS REQUESTED BY
- 1.35. MEYER WOULD PREFER ALL BID INFORMATION GIVEN TO THE GENERAL CONTRACTORS NOT BE DISCLOSED TO THE DODGE REPORTS, CONSTRUCTION NEWS, OR ANY OTHER CONSTRUCTION PUBLICATION WITHOUT WRITTEN PERMISSION FROM
- 1.36. WHILE MEYER MAKES REASONABLE EFFORT TO SPECIFY ONLY PRODUCTS THAT: A) MEET OR EXCEED MINIMUM INDUSTRY STANDARDS, B) HAVE PUBLISHED APPROPRIATE TEST RESULTS, C) ARE APPROPRIATE FOR THE INTENDED USE, D) THAT HAVE BEEN RESEARCHED AND TESTED, E) ARE OFFERED BY COMPANIES IN GOOD FINANCIAL STANDING AND WARRANT THEIR PRODUCTS, MEYER CANNOT GUARANTEE WARRANTY OR BE HELD RESPONSIBLE FOR A PRODUCT'S OR
- 1.37. UPON SUBMITTING A BID AND ACCEPTING AWARD OF CONTRACT FOR THE PROJECT OUTLINED WITHIN THESE DOCUMENTS. THE CONTRACTOR ACKNOWLEDGES ITS RESPONSIBILITY TO REVIEW THE CONTRACT DOCUMENTS FOR CONSTRUCTABILITY (MEANING THE DIFFICULTY, COST AND TIME TO BUILD THE PROJECT AS DESIGNED) BY ITSELF AND ITS SUBCONTRACTORS; AND THEREFORE, HAVING SATISFIED ITSELF AND ITS SUBCONTRACTORS THAT THE PROJECT CAN BE BUILT AS DESIGNED AND WITHIN THE COST OUTLINED IN THE CONTRACT, THE CONTRACTOR WAIVES THE RIGHT TO MAKE ANY CLAIMS AGAINST THE OWNER, ARCHITECT AND ALL THE ARCHITECT'S CONSULTANTS FOR ANY INCREASED COSTS, CONSTRUCTION COSTS AND/OR DAMAGES BASED ON ANY ALLEGED MISREPRESENTATION, ERROR, AND OMISSION IN THE CONTRACT DOCUMENTS OR DELAY IN SCHEDULE AND/OR COMPLETION OF THE PROJECT.

MANUFACTURER'S FAILURE, OR ITS INABILITY TO SATISFY ITS OBLIGATIONS.

- 1.38. THE CONTRACTOR ALSO AGREES, UPON SUBMITTING A BID AND ACCEPTING AWARD OF CONTRACT, THAT IT SHALL SECURE SIMILAR CERTIFICATIONS AND WAIVERS FROM EACH OF ITS SUBCONTRACTORS FOR THE PROJECT WAIVING THEIR RIGHTS CONSTRUCTION OR DELAY IN CONSTRUCTION DUE TO ANY ALLEGED MISREPRESENTATION, ERROR OR OMISSION IN THE
- 1.39. MEYER SHALL HAVE NO RESPONSIBILITY FOR THE DISCOVERY, PRESENCE, HANDLING, REMOVAL/DISPOSAL OF OR EXPOSURE OF PERSONS TO HAZARDOUS MATERIAL IN ANY FORM AT THE PROJECT SITE, INCLUDING, BUT NOT LIMITED TO ASBESTOS, ASBESTOS PRODUCTS, POLYCHLORINATED BIPHENYL (PCB) OR OTHER TOXIC SUBSTANCES.

CODE REQUIREMENTS

GENERAL NOTES	S :	·	
1. ENTIRE BUILDING IS NOT	SPRINKLERE	<u>D</u>	

	-																									
 									-																	
1	۸DC	PT	ED	COI	DES	ARE	AS	FOL	LOV	VS:	2009	IBC	& M	IAINE	EUN	FOR	ΜВ	UIL	DIN	G 8	k ENE	ERGY	CC	DE	(ML	JBE(


	2009 IBC
OCCUPANCY GROUP	B - BUSINESS
CONSTRUCTION TYPE	2A UNPROTECTED, NONCOMBUSTIBLE
OTHER REQUIREMENTS:	
CORRIDOR FIRE RESISTANCE RATING	1 HR. IF NOT SPRINKLERED AND (2) MEANS OF EGRESS IS REQUIRED IN THE BUILDING [T1018.1]
SEPARATION OF EQUAL OCCUPANCIES	0 HR. [T508.4]
FIRE SEPARATION WALLS	BATTERY STORAGE - 1 HR SEPARATION ELECTRICAL EQUIPMENT ROOM - 1 HR SEPARATION FIRE ALARM CONTROL ROOM - 1 HR SEPARATION MACHINE ROOM - EQUAL TO SHAFT RATING STORAGE ROOMS OVER 100SQ,FT, - 1 HR OR SPRINKLERS [508.2]
EXIT REQUIREMENTS:	3
COMMON PATH OF EGRESS TRAVEL	75' WITHOUT SPRINKLERS [1014.3]
NUMBER OF EXITS	1 TO 49 OCCUPANTS - 1EXIT REQUIRED UNDER 500 OCCUPANTS - 2 EXITS REQUIRED 501 TO 1000 OCCUPANTS - 3 EXITS REQUIRED OVER 1000 OCCUPANTS - 4 EXITS REQUIRED [1021]
EXIT ACCESS TRAVEL DISTANCE	200' MAX WITHOUT SPRINKLERS [T1016.1]
DEAD END LIMIT	20' WITHOUT SPRINKLERS [1018.4]
EXIT CORRIDOR WIDTH	GROUND FLOOR - 44" MIN. [1018.2]
OCCUPANT LOAD	EQUAL TO GROSS SQUARE FOOTAGE / 100 SQ.FT PER OCCUPANT [T1004.1.1]
	BUSINESS 4,019 SF (GROSS) 100 SF (GROSS)/PERSON =40.19
	TOTAL OCCUPANTS = 40
EGRESS CAPACITY	WITH SPRINKLERS .3" PER OCCUPANT FOR STAIRWAYS .2" PER OCCUPANTS FOR OTHER EGRESS COMPONENTS [1005.1]
	.2" PER 40 PEOPLE = 8"
PLUMBING REQUIREMENTS: [T 2902,1]	
WATER CLOSETS	1 PER 25 FOR THE FIRST 50 AND 1 PER 50 FOR THE REMAINDER EXCEEDING 50
LAVATORIES	1 PER 40 FOR THE FIRST 80 AND 1 PER 80 FOR THE REMAINDER EXCEEDING 80
DRINKING FOUNTAINS	1 PER 100
SERVICE SINKS	1 SINK REQUIRED

LOCATION MAP

CLASS B - IF LESS THAN (3) STORIES AND NOT SPRINKLERED [T803.9]

CLASS B - WITHOUT SPRINKLERS [T803.9]

CLASS C - WITHOUT SPRINKLERS [T803.9]

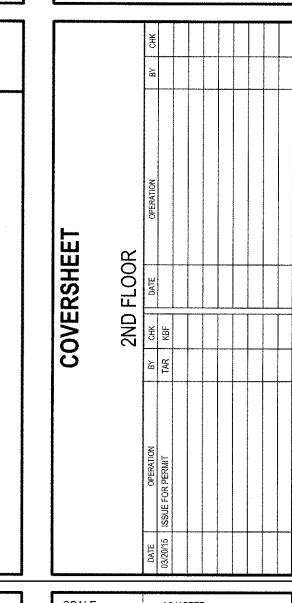

SCALE:	AS NOTED
JOB. NO.:	15016
PM:	КРВ
PROJECT NORTH	DRAWING NO.
1	CS